

# EzPro 705

**PROJECTOR**

## Micro Portable Multimedia Projector

- Only 5 lbs. (2.3 kgs) Compact Design
- 800 ANSI Lumens High Brightness and Outstanding 400:1 Contrast
- Manual Zoom and Focus Function Making Set-up Easy
- Advanced DLP™ Technology for Vivid, Clear Images
- Picture in Picture Function and Digital Keystone Correction Adjustment
- Real Plug and Play with Auto Image Function
- Including Luxurious Carrying Case and All Necessary Cables



Optoma  
www.optoma.com



# EzPro 705

**PROJECTOR**

## SPECIFICATIONS



### Display

Digital Light Processing™(DLP) technology by Texas Instruments

### Resolution

SVGA 800 pixels (H) x 600 lines (V)

### Computer Compatibility

XGA (compressed), VGA, SVGA, Macintosh, NEC PC98 series, and Fujitsu FM Towns

### Video Compatibility

NTSC, NTSC 4.43, PAL, PAL-M/N and SECAM

### Aspect Ratio

4:3, 16:9 Compatible

### Contrast Ratio

400:1 (Full On/Off), 200:1 (Checkerboard)

### Displayable Colours

16.7M Colours

### Brightness

800 ANSI Lumens

### Projection Lens

F=2.8~3.1, f=31~40mm  
1:1.3 manual zoom and focus

### Projection Screen Size

17" (0.4m)~223" (5.7m) diagonal

### Throw Distance

3.3'(1m)~33'(10m)

### Horizontal Scan Rate

30-69 kHz

### Vertical Refresh Rate

50-85Hz

### Lamp Type

120 W user replaceable P-VIP lamp

### Lamp Life

2000 hours

### Keystone Correction

+/- 16 degrees

### Audio

One internal speaker with 3 watts output

### Weight

5lbs (2.3kgs)

### Dimension

90 x 218 x 252 mm, 3.5 x 8.6 x 9.9 inches

### Power Supply

AC input 90-264V auto-switching power supply

### Power Consumption

180W (max.)

### Operation Temperature



10°C~40°C

### Standard Accessories

AC power cord, VGA signal cable, Composite video cable, S-Video signal cable, Audio cables, User's manual, Wireless remote control, Carrying case, Lens cap, Warranty card

Projection Distance	Min. Image Size	Max. Image Size
3.3' / 1m	17" / 1.4' / 0.4m	22" / 1.9' / 0.6m
6.6' / 2m	34" / 2.8' / 0.9m	44" / 3.7' / 1.1m
9.8' / 3m	51" / 4.3' / 1.3m	67" / 5.6' / 1.7m
13.1' / 4m	67" / 5.5' / 1.7m	87" / 7.2' / 2.2m
16.4' / 5m	83" / 6.9' / 2.1m	111" / 9.3' / 2.8m
19.7' / 6m	103" / 8.6' / 2.6m	130" / 10.8' / 3.3m
23.0' / 7m	120" / 10.0' / 3.1m	154" / 12.8' / 3.9m
26.2' / 8m	134" / 11.1' / 3.4m	173" / 14.4' / 4.4m
29.5' / 9m	150" / 12.4' / 3.8m	197" / 16.4' / 5.0m
32.8' / 10m	165" / 13.7' / 4.2m	217" / 18.0' / 5.5m

Projection Screen Size

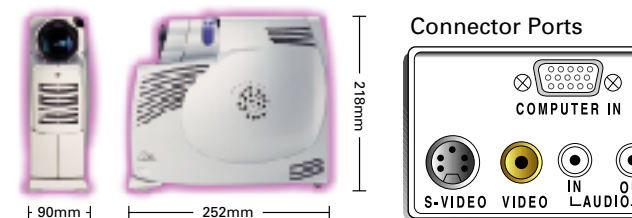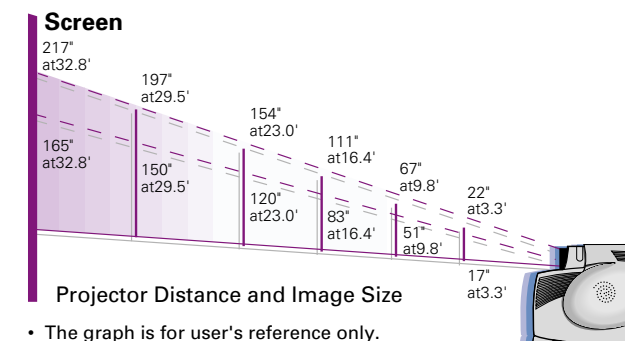

Specification are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies. DLP™ and DMD™ Device are registered trademarks of Texas Instruments Incorporated.

### Optoma Worldwide Location

Optoma Europe Ltd.	Tel: 44-1923-691-800	Fax: 44-1923-691-888	marketing@optoma.co.uk
Optoma Deutschland GmbH.	Tel: 49-211-506-6670	Fax: 49-211-506-66799	
Optoma Technology Inc.	Tel: 1-408-383-3700	Fax: 1-408-383-3701	
Optoma Japan Co., Ltd.	Tel: 81-3-5363-2461	Fax: 81-3-5363-3241	
Optoma (China & H.K.) Ltd.	Tel: 852-2396-8968	Fax: 852-2370-1222	
Optoma Korea Co., Ltd.	Tel: 82-417-562-7277	Fax: 82-417-562-7276	
Optoma Corp.	Tel: 886-3-577-2000	Fax: 886-3-579-7957	

Optoma  
www.optoma.com