

CASIO LED HIGH BRIGHT XJ-H1650/XJ-H1600




20,000-hour long-life light source with ECONOMY MODE

NEW

Intelligent Brightness Control	Automatic vertical keystone correction	RGB output terminal	MobiShow® compatible wireless LAN *	DLP® 3D projection	Control terminal
Interactive pointing *	Built-in speaker < 10W >	USB memory compatible *	HDMI terminal	Wired LAN terminal *	Wireless connection compatible *
Wide-angle zoom lens < 1.5X >	Ceiling-mounted projection	Anti-theft lock			

Ideally suited for fixed installation, such as ceiling-mount installation. Designed for large-screen projection in large spaces and bright rooms.

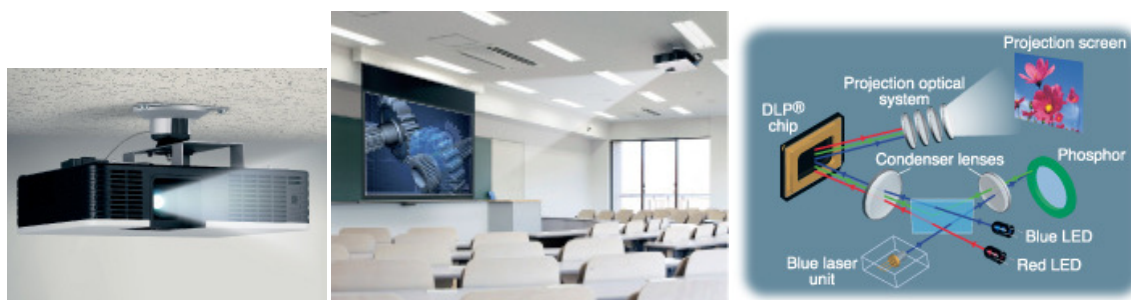

Specifications

Model	XJ-H1650	XJ-H1600
Brightness*1	3500 ANSI lumens	
Contrast ratio	1400 : 1	
Keystone correction	+30° (auto) ±30° (manual)	
Focusing	Manual focus	
Projection lens	1.2X optical zoom lens (manual)	

Projection screen size	27 ~ 300-inch 60-inch-screen: 1.9m ~ 2.3m
Projection range	100-inch-screen: 3.3m ~ 3.9m, Minimum range: 0.85m
Projection system	DLP® system
Display element	XGA 0.7-inch DLP® chip 786,432 pixels (1,024 x 768)
Color reproduction	Full color (16.77 million colors) XGA Real (1,024 x 768)
Display resolution	Compressed: Maximum UXGA (1,600 x 1,200)
RGB	RGB mini D-Sub 15 pin x 2
Input terminal	(Also serves as YCbCr/YPbPr input terminal.) RGB mini D-Sub 15 pin x 1
Output terminal	RGB mini D-Sub 15 pin x 1
Digital input	HDMI Type A x 1 (480P ~ 1080P)
Input terminal	HDMI Type A x 1 (480P ~ 1080P)
Signal system	NTSC/PAL/PAL-N/PAL-M/PAL60/SECAM
Video input	Composite (RCA) terminal x 1, S-Video terminal x 1, Component: Also serves as RGB mini D-Sub 15 pin.
Input terminal	Component: Also serves as RGB mini D-Sub 15 pin.
Audio	RCA x 1 (R/L), Stereo mini-jack x 2
Input/output terminal	RCA x 1 (R/L), Stereo mini-jack x 2
Speaker	10W monaural
USB host	USB (2.0-compliant) Type A x 1 (USB terminal on rear)**2 -
Other terminals	USB (2.0-compliant) Type B x 1 (USB terminal on rear) -
USB function*3	USB (2.0-compliant) Type B x 1 (USB terminal on rear) -
Control terminal	RS-232C (mini D-Sub 9 pin) x 1 -
LAN terminal	RJ-45 x 1 -
Wireless compatibility	IEEE 802.11b/g*4 MobiShow® compatible -
Power source	AC 100V ~ 240V, 50/60Hz
Power consumption	Operating power: 350W (with Eco Mode "Eco 1" selected), 430W (with Eco Mode Off "Bright" selected) / Standby power consumption: 0.4W*5
External dimensions (WxHxD)	400 x 106 x 323mm (including projections)
Weight	7.1kg
Remote controller	Wireless remote controller
Security compatibility	Kensington-compatible, Power-on password
Other functions	DLP® 3D projection, Intelligent Brightness Control, Interactive pointing function (XJ-H1650 only), Closed captioning, Direct power-ON, Direct power-OFF, Digital zoom (2X), Rear projection, Freeze, Pointer, Color mode, Eco mode, Blank, Ceiling mount*6
Main accessories	Wireless remote controller / AC power cord / RGB cable / Instruction manual (on CD-ROM)*7 / Quick reference / Warranty card / Soft case

CONTECT:

SS AUDIO VISUALS

10 RAJ AXAR, B/S ANAND AGRI UNIVERSITY, HADGUD ROAD, (ANAND)

CALL: +919099252583 & +919274760400 MAIL: info@ssav.in & ssaudiovisuals@gmail.com