

LC-XIP2610 / WIP3000

XGA / WXGA Short Throw + "Interactive" LCD Projector

EIKI
Eiki grows with you



LC-XIP2610	2600 Lumens	XGA 1024 x 768
LC-WIP3000	3000 Lumens	WXGA 1280 x 800



Outstanding Features

- Brightness 2600 / 3000 Lumens (LC-XIP2610 / WIP3000)
- Native XGA / WXGA Resolution (LC-XIP2610 / WIP3000)
- WSXGA+ ~ VGA and MAC compatible
- Equipped Short Throw Lens (Throw ratio 0.615 : 1)
- Interactive function permit real-time annotation on projected image
- Pen & Pointer function as both writing instruments & computer mouse
- LC-XIP2610 / WIP3000 can be used as interactive whiteboard everywhere without any special whiteboard and screen
- Smooth writing and no jagged letter : 1.5 times smoother than conventional models
- Free installation : Vertical 360 degree
- Security : Security Bar, PIN code lock, Kensington® Lock



Interactive function

With LC-XIP2610 / WIP3000, you can virtually create a touch screen on any form of projection surface.


Simple and user-friendly interactive function tool bar makes it easy for you to handwrite and draw a figure on screen.

PC + LC-XIP2610 / WIP3000 = Interactive Whiteboard !

LC-XIP2610 / WIP3000

XGA / WXGA Short Throw + "Interactive" LCD Projector

Controls

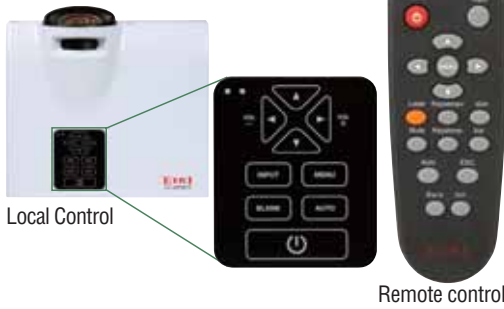

Local Control

Remote control

Terminals



LC-XIP2610



LC-WIP3000


Advanced projector technology

The short projection distance enable people to use the projector even in a small space, such as meeting room, exhibition booth, and display window.

This Short Throw projector prevent the blinding light from shining into eyes and the presenter can make a presentation comfortably.

The presenter can make a presentation standing close to the screen without shadow on the screen. This Short Throw projector minimize the projector-to-screen distance.

Screen size	Projection distance	
	LC-XIP2610	LC-WIP3000
50 in.	0.61 m (2.00 ft.)	0.65 m (2.13 ft.)
60 in.	0.74 m (2.43 ft.)	0.79 m (2.59 ft.)
70 in.	0.87 m (2.85 ft.)	0.92 m (3.01 ft.)
80 in.	1.00 m (3.28 ft.)	1.06 m (3.48 ft.)
90 in.	1.13 m (3.71 ft.)	1.20 m (3.94 ft.)
100 in.	1.26 m (4.13 ft.)	1.34 m (4.39 ft.)
110 in.	1.39 m (4.56 ft.)	—

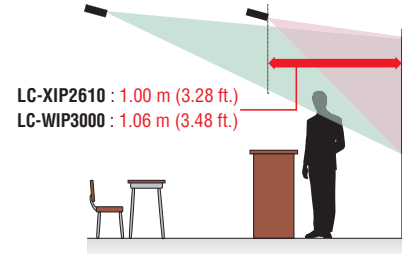

LC-XIP2610 : 1.00 m (3.28 ft.)
LC-WIP3000 : 1.06 m (3.48 ft.)


Dimensions



H x W x D
132 x 348 x 360 mm
(5.20 x 13.70 x 14.17 in.)

Pointer : 520 ~ 800 mm (20.5 ~ 31.5 in.)

Pen : 157 mm (6.2 in.)



Specifications

Model		LC-XIP2610	LC-WIP3000
Screen Brightness (ANSI)		Up to 2600 Lumens	Up to 3000 Lumens
Contrast Ratio		500 : 1 (Max.)	
Projection Lamp		210 W UHP	245 W UHP
Estimated Lamp Life		6000 / 4000 H (Normal / Powerful)	5000 / 2500 H (Normal / Powerful)
Screen Pixels		1024 x 768 (XGA)	1280 x 800 (WXGA)
Total Pixels		2359296 (<1024 x 768> x 3)	3072000 (<1280 x 800> x 3)
Lens Shift		Fixed, Optical offset 110 %	Fixed, Optical offset 122 %
Zoom Ratio		Fixed Focal Length Lens	
Throw Ratio		0.615 : 1	
Image Diagonal		127 ~ 279 cm (50 ~ 110 in.)	127 ~ 254 cm (50 ~ 100 in.)
Image Width		1.02 ~ 2.24 m (3.34 ~ 7.35 ft.)	1.08 ~ 2.15 m (3.54 ~ 7.05 ft.)
Throw Distance		0.61 ~ 1.39 m (2.00 ~ 4.56 ft.)	0.65 ~ 1.34 m (2.13 ~ 4.39 ft.)
Front Elevation		Up to 7°	
Image Orientation		Normal, Reversed, Inverted	
Local Control		Full Function	
Remote Projector Control		Wireless (Infra Red) x 1	
Control Port (for RS-232 control)		D-sub 9 x 1	
Control Port (USB)		USB 2.0 type B x 1 (for interactive function)	
Wired Network Port		LAN (RJ-45) x 1	
Computer Native Resolution		1024 x 768 (XGA)	1280 x 800 (WXGA)
Computer	Compatibility	WSXGA+, XGA, SXGA+, WXGA, SXGA, Quad-VGA, XGA+, XGA, SVGA, VGA, MAC	
Video	System Compatibility	NTSC / PAL / SECAM	
	HD / SD Compatibility	1080i, 1080p, 720p / 576i, 576p, 480i, 480p	
	Formats Supported	Native 4 : 3	Native 16 : 10
Image Connections	Computer Input	D-sub 15 x 1, DVI-I x 1	D-sub 15 x 2, HDMI x 1
	Video Input	Composite, Mini Din 4pin (S-Video) x 1, RCA-3 (Component) x 1	
Monitor Output		D-sub 15 x 1	D-sub 15 x 1 (Common with input)
Audio	Audio Input	Stereo : Mini-Jack x 2, RCA (L / R) x 1	
Connections	Audio Output	Stereo : Mini-Jack x 1	
Audio	Amplifier	Mono : 8 W x 1	

Model		LC-XIP2610	LC-WIP3000
Fan Noise		38 / 33 dB (Powerful / Normal)	
Cabinet	Dimensions (H x W x D)*	132 x 348 x 360 mm (5.20 x 13.70 x 14.17 in.)	
	Weight	4.1 kg (9.0 lb.)	
Packaged	Dimensions (H x W x D)	233 x 464 x 481 mm (9.17 x 18.27 x 18.94 in.)	
	Weight	6.8 kg (15.0 lb.)	
Power Requirements		100 ~ 240 V AC, 50 / 60 Hz	
Power Consumption		295 / 230 W (Powerful / Normal) 310 / 235 W (Powerful / Normal)	
Power Consumption (Standby)		Less than 1 W / Less than 2 W (Normal / with LAN)	
Power Cord		1.8 m (5.9 ft.) Detachable	
Heat		1007 BTU/hr / 785 BTU/hr (Powerful / Normal)	1058 BTU/hr / 802 BTU/hr (Powerful / Normal)
Electrical Safety Compliance		UL, cUL, IEC	
Electromagnetic Compatibility		FCC, ClassB, CE Mark	
Security Facilities		Security Bar, PIN code lock	
Operating Temperature		5 ~ 35 °C (41 ~ 95 °F)	
Interactive Function System Requirement	Technology	Infrared	
	CMOS Sensor	2560 x 1920 pixels	
	OS Required	Windows XP (SP2) / Vista / Windows 7 (32 / 64 bit)	
	Processor Type	For Light Pen 3-Lite : Intel Pentium-M 1.5 GHz or above For Light Pen 3 : Intel Pentium-4 2.0 GHz or above (dedicated GPU is recommended)	
	RAM Size	512 MB or above	
Min. HDD Space		80 MB	
Other hardware		USB 2 port or above, CD-ROM Driver	
Projector Accessories		Quick start guide, Owner's manual (CD-ROM), AC Power cord : 1.8 m (5.9 ft.), Computer cable : 1.5 m (4.9 ft.), USB Mouse cable A-B : 1.5 m (4.9 ft.), Remote control, AAA Battery x 2	
Optional Accessories		Replacement Lamp, Replacement Filter	
Pointer / Pen Bag Accessories		Accessory Bag, Pointer (Black), Pen (Black), Strap, AA Battery x 2, AAA Battery x 2	

* Including protrusion

EIKI
Eiki grows with you