

LC-XAU200/ WAU200

XGA/WXGA Short Throw Projector

EIKI
Eiki grows with you

Requires short distance to project on a large screen.




LC-XAU200 3300 Lumens XGA (1024 x 768)

LC-WAU200 3000 Lumens WXGA (1280 x 800)

Outstanding Features

- Brightness LC-XAU200 : 3300 Lumens
LC-WAU200 : 3000 Lumens
- Contrast Ratio 3000 : 1
- Short Throw Distance, Throw Ratio 0.46 : 1
- Pleated Filter & Oneway Flow Cooling System
- Built-in 7-Watt Audio Speaker
- Equiped Long Life Lamp(5000h : eco)
- Top-accessed Lamp makes Easy-maintenance
- Security : Security Bar, PIN code lock
- Network : Built-in RJ45
- HDMI
- WSXGA+ - VGA compatible

Advanced projector technology

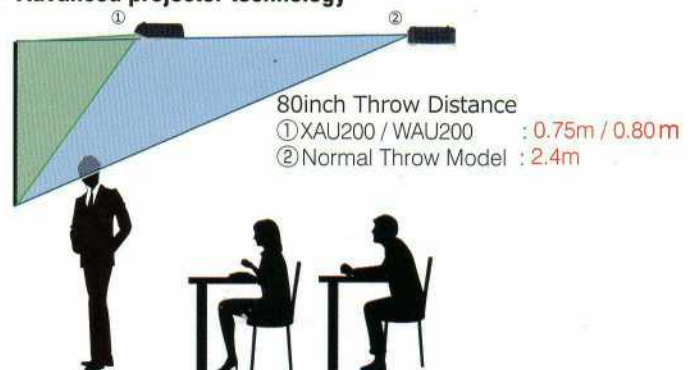

Screen size	W:H	50"	60"	70"	80"	100"
LC-XAU200	4:3	0.46m	0.55m	0.65m	0.75m	0.94m
LC-WAU200	16:10	0.48m	0.59m	0.69m	0.80m	1.00m

- The short projection distance enable people to use the projector even in a small space, such as meeting room, exhibition booth, and display window.
- This short throw projector prevent the blinding light from shining into eyes and the presenter can make a presentation comfortably.


■ Terminals



- ① Audio Out ② Audio in (Video:L(mono)/R) ③ Component/Video ④ S-video
- ⑤ VGA In ⑥ VGA In 2 (VGA Out) ⑦ HDMI ⑧ Audio in ⑨ RS232C
- ⑩ LAN (RJ45)

■ Controls

Control Panel

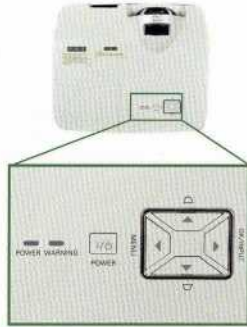

Remote control



■ Pleated Filter



■ Dimensions

W x H x D

391.2 x 126.3 x 329.2 mm



(Hg)
Lamp Contains Mercury.
Do not put in trash.
Dispose-of-as
Hazardous
Waste, according to the
laws in your jurisdiction.

■ Specifications

Model	LC-XAU200	LC-WAU200
Panel Size	0.63" 3LCD organic	0.59" 3LCD inorganic
Screen Brightness (ANSI)	3,300 Lumens	3,000 Lumens
Illumination Uniformity	80%	
Contrast Ratio (iris mode :On)	3000:1	
Estimated Lamp Life (Eco/Normal)	5,000 / 3,000 hours	
Projection Lamp	NSH 230 W	
Screen Pixels	1,024 x 768	1,280 x 800
Total Pixels	2,359,296 (1,024 x 768 x 3)	3,072,000 (1,280 x 800 x 3)
Aspect Ratio	4:3	16:10
Lens	F 1.8, f = 6.08 mm	
Zoom	Fixed	
U / D Ratio	21:-1	7.25:-1
Screen size	50 - 100 inch	
Throw Distance (Wide ~ Tele)	0.46 - 0.94 m	0.48 - 1.00 m
Throw Ratio	0.46:1	
Projector Elevation Adjustment	Up to 10 degrees	
Vertical Keystone Correction	Max. ± 15 degrees	
Scanning Frequency	Auto : H Sync. 15 - 100 KHz, V Sync. 48 - 85 Hz	
Dot Clock	150 MHz	
Image Orientation	Normal, Reversed, Inverted	
Local Control	Full Function	
Remote Projector Control	Wireless (Infra Red) x 1	
Computer Native Resolution	1,024 x 768	1,280 x 800
Computer : Compatibility	WSXGA+ - VGA	
Computer : Formats	1,680 x 1,050 through 640 x 480	
Video : System Compatibility	NTSC / PAL / SECAM	
Video : Compatibility	480 i/p, 576 i/p, 720p, 1080 i/p	
Video : Formats Supported	4 : 3 and 16 : 9	

Model	LC-XAU200	LC-WAU200
Input Terminal	VGA	D-sub15 x 2 (VGA2 is shared with Monitor Out)
	Digital	HDMI x 1
	Component	3RCA x 1 (Share with Video)
	Video	RCA x 1 (Share with Component)
	S-Video	Min Din-4 x 1
	PC Audio, Analog	3.5mm Mini-Stereo Jack x 1
	AV Audio, Analog	2RCA(L/R) x 1
Output Terminal	VGA	D-sub15 x 1 (Share with VGA in 2)
	Audio, Analog	3.5mm Mini-Stereo Jack x 1
Control Terminal	RS232	D-sub9 x 1
Network (LAN)		RJ45 x 1
Built-in Speaker		Mono 7.0 W x 1
Fan Noise (Normal)		34 dB
Cabinet Size (W x H x D)		391.2 x 126.3 x 329.2 mm
Weight		4.0 kg
Packaged Size (W x H x D)		482 x 216 x 415 mm
Packaged Weight		5.7 kg
Power Requirements		100 - 240 V AC, 50 / 60 Hz
Power	Normal / Eco	290 W
Consumption	Stand-by	<0.5 W
Heat		986 BTU
Power Cord		Detachable
Electrical Safety Compliance		cTUVus, CB
Electromagnetic Compatibility		FCC ClassB, CE Mark
User Maintenance		Replace Air Filter, Replace Lamp
Standard Accessories		Owner's Manual on CD-ROM, Quick Start Guide, AC Power Cord, VGA Cable Dsub15 - Dsub15, Remote Control (with AAA batteries x 2)

EIKI

Eiki grows with you

ProSelecta