

EIP-UJT100

WUXGA Large Class 3-chip DLP Projector

EIKI
Eiki grows with you

Professional Image Quality by Flagship 3-chip DLP projector



EIP-UJT100 | 14000 lm | WUXGA(1920 x 1200)

Outstanding Features

High Image Quality

WUXGA (1920 x 1200)
Brightness :14000 lm
Contrast Ratio : 2000 : 1
Variety of Inputs (HDBaseT, 3G-SDI, HDMI , DVI, etc...)

Professional installation


Optional Lens (6 Types)
Horizontal & Vertical Lens Shift (Max. H: +/-10 , V: -25 to +50 %)
Horizontal & Vertical Keystone (Max. H: +/- 35 , V: +/- 20 degree)
Corner Keystone Correction
Powered Zoom and Focus
Lens Center Function

Versatile function


Image Warp
Edge Blending
3D Function (3D-DVI)
Mechanical Shutter
Picture in Picture
Pleated Filter

3-chip DLP system

- ⊙ High Brightness
- ⊙ High Contrast
- ⊙ High Color reproduction
- ⊙ High Durability

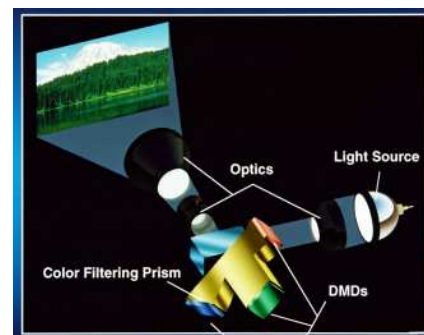


HDBaseT

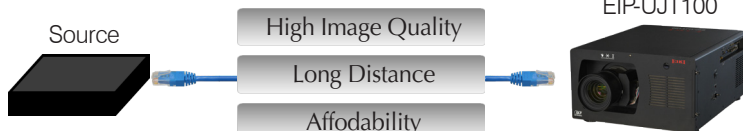

EIP-UJT100 WUXGA Large Class 3-chip DLP Projector

Terminal

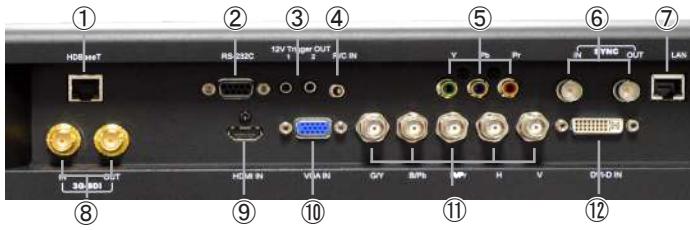

- ① HDBaseT ⑤ 3RCA (Y,Cb,Cr) ⑨ HDMI
- ② RS232C ⑥ 3D Sync IN/OUT ⑩ VGA
- ③ 12V Trigger Out ⑦ LAN ⑪ 5BNC (RGBHV/Y,Cb,Cr)
- ④ R/C Jack ⑧ 3G-SDI (IN/OUT) ⑫ DVI-D

Dimensions



W x D x H
505 x 550 x 250 mm

Remote Control



Option Lens

| Type | Parts Number | Throw Ratio | Zoom Ratio | Lens Shift | | Weight |
|---------------|--------------|-----------------|------------|--------------|--------------|--------|
| | | | | Up / Down | Left / Right | |
| Short Fixed | AH-D22010 | 0.67 : 1 | - | 0 % | 0 % | 4.5 kg |
| Short Fixed | AH-D22020 | 1.12 : 1 | - | -25 to +50 % | 0 % | 5.8 kg |
| Short Zoom | AH-D22030 | 1.39 - 1.87 : 1 | 1.34 | -25 to +50 % | +/- 5 % | 6.1 kg |
| Standard Zoom | AH-D21010 | 1.87 - 2.56 : 1 | 1.37 | -25 to +50 % | +/- 10 % | 5.1 kg |
| Long Zoom | AH-D23010 | 2.56 - 4.16 : 1 | 1.62 | -25 to +50 % | +/- 10 % | 5.2 kg |
| Long Zoom | AH-D23020 | 4.16 - 6.96 : 1 | 1.67 | -25 to +50 % | +/- 10 % | 4.6 kg |


Lamp(AH-D31010)



Front Filter(3243411700)



Rear Filter(3243270701)



Specifications

| Model | EIP-UJT100 |
|------------------------------------|---|
| Panel Size | 0.96" 3-chip DMD |
| Resolution | WUXGA (1920 x 1200) |
| Aspect Ratio | 16:10 |
| Brightness | 14000 lm |
| Contrast Ratio | 2000 :1 |
| Projection Lamp | 465W x 2 |
| Estimated Lamp Life (Eco / Normal) | 2500 / 2000 hrs |
| Screen Size | 80 - 600 inch |
| Zoom Ratio | Depend on lens (See above table) |
| Throw Distance (Wide - Tele) | Depend on lens (See above table) |
| Throw Ratio | Depend on lens (See above table) |
| Power Lens Shift (AH-D21010) | V: -25% to +50% , H : +/-10% (See above table) |
| Keystone Correction | V: +/- 20 degree , H : +/- 35 degree Corner Keystone |
| Projector Elevation Adjustment | +/- 5 degree |
| Scanning Frequency | H sync: 15.63 - 91.15 kHz , V sync: 23.98 -120.0 Hz |
| Dot Clock | 162MHz |
| Image Orientation | Normal, Reversed, Inverted |
| Remote Control | Wireless (Infra Red) x 1 |
| Computer : Compatibility | WUXGA (1920 x 1200) - VGA (640 x 480) |
| Video : Compatibility | 1080 i/p, 720p, 576 i/p, 480 i/p |

| Model | EIP-UJT100 | |
|--------------------------|--|--------------------------------------|
| Input Terminal | HDBaseT Lite | RJ-45 x 1 |
| | 3G-SDI | BNC x 1 |
| | HDMI (1.3) | HDMI x 1 |
| | DVI | DVI-D x 1 |
| | VGA (Analog) | D-SUB 15 pin x 1 , 5BNC x 5 |
| | Component | 3RCA x 1 |
| Output Terminal | 3G-SDI | BNC x 1 |
| Control Terminal | LAN | RJ-45 x 1 |
| | Serial Port (RS-232C) | D-sub9 pin x 1 |
| | Remote control | 3.5-mm, mini jack x 1 |
| | 12V trigger | 3.5-mm, mini jack x 2 |
| | 3D Sync (IN/OUT) | BNC x 2 |
| Fan Noise (Eco / Normal) | 42 dB / 46 dB | |
| Dimensions (W x D x H) | 505 x 550 x 250 mm | |
| Weight | 37 kg | |
| Power Requirements | 100 - 240V AC 50-60Hz | |
| Power Consumption | Normal | 1230 W (110V) / 1150 W (220V) |
| | Stand-by | RJ45 - Off : < 2W , RJ45 - On : < 5W |
| Thermal dissipation | 4198 BTU / hr (110V) , 3925 BTU / hr (220V) | |
| Operating Condition | Temperature | 5 °C - 40 °C |
| | Humidity | 10 - 95 % |
| Standard Accessories | AC Power Cable(US)110V, (US)200V, (EU), (China), Remote Control, Battery AAx2, Owners Manual (CD-ROM), Quick Start Guide, Wired Remote Cable | |