

DIGITAL PROJECTOR | MW705




Features

- WXGA (1280x800) resolution
- 4,000 ANSI lumens
- Dual HDMI, MHL x 1
- H + V keystone image adjustment
- Optional wireless presentation on the go



Input and Output Terminals

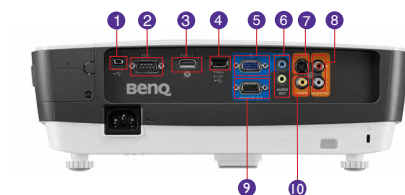

- | | |
|-----------------------------|------------------------------|
| 1 USB (Type mini-B) | 6 Audio In & Out (Mini Jack) |
| 2 RS232 (DB-9pin) | 7 S-Video in |
| 3 HDMI | 8 Audio L/R in (RCA) |
| 4 USB (TypeA) | 9 Monitor out |
| 5 Computer in (D-sub 15pin) | 10 CompositeVideo in (RCA) |
| | 11 HDMI / MHL |

Specifications

Projection System	DLP®
Native Resolution	WXGA (1280x800)
Brightness	4000 ANSI Lumen
Contrast Ratio	13000:1
Display Color	1.07 Billion Colors
Lens	F=2.56~2.68, f=22.04~24.14mm
Aspect Ratio	Native 16:10 (5 aspect ratio selectable)
Throw Ratio	1.55~1.7(87" @ 2.9m)
Image Size	60" ~ 180"
Zoom Ratio	1.1x
Lamp Type	240W
Lamp (Normal/Eco/SmartEco Mode)	2500/4000/6000/7500(80%~30%) hours
Keystone Adjustment	2D, Vertical & Horizontal ± 40 degrees; Auto vertical keystone ± 30 degrees
Projection Offset	Vertical: 100% ±5%
Resolution Support	VGA(640 x 480) to UXGA (1600 x 1200)
Horizontal Frequency	15K-102KHz
Vertical Scan Rate	23-120Hz
Compatibility	HDTV Compatibility: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p Video Compatibility: NTSC, PAL, SECAM 3D Compatibility: Frame Sequential: Up to 60Hz 720p Frame Packing: Up to 24 Hz 1080p Side by Side: Up to 24Hz 1080p Top Bottom: Up to 60Hz 1080p
Interface	Computer in (D-sub 15pin) x 1 (integrate with component) HDMI x 2 (HDMI with MHL2.0 x1, HDMI x 1) MHL x 1 (HDMI with MHL2.0) Monitor out x 1 Composite Video in (RCA) x 1 S-Video in x 1 Audio in (Mini Jack) x 1 Audio in (L/R) x 1 Audio out (Mini Jack) x 1 Speaker 2W x 1 USB (Type A) x 1 (1.5A power supply) RS232 (DB-9pin) x 1 IR Receiver x 2 (Front+Top)
Dimensions (WxHxD)	11.8" x 3.4" x 9.4" / 300 x 88 x 240 mm (feet included)
Weight	6.6 lbs / 3 Kg
Power Supply	AC100 to 240V, TBD A, 50 to 60 Hz
Power Consumption	Typical 350W, Standby <0.5W
Power Management Function	Automatic power off after 20 minutes without a display source
Audible Noise	31/28 dBA (Normal/Economic mode)
Languages	(28 Languages)
Picture Mode	**Dynamic / Presentation / sRGB / Cinema / (3D) / User 1 / User 2
Accessories (Standard)	Carry bag, Power Cord, Remote Control w Battery, VGA cable, User Manual CD, QSG Lens Cover, Warranty Card
Accessories (Optional)	Spare Lamp Kit P/N: 5J.JEC05.001 Ceiling mount kit P/N: 5J.JAM10.001 3D Glasses P/N: 5J.J9H25.001 QCast Dongle QP01 P/N: 5J.JCK28.A01
UPC / Part #	8400460-3317-0 / 9H.JEC77.13A
Limited Warranty	1 year parts and labor / 1 year or 2,000 hours lamp life

*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.



ProSelecta

View :: Compare :: Select - www.ProSelecta.com