

DIGITAL PROJECTOR | SW921



Features


- Native WXGA (1280x800) resolution
- 5,000 ANSI lumens
- 5,000:1 high contrast ratio
- Vertical lens shift
- 1.6x zoom
- Easy installation and control



Specifications

Projection System	DLP®
Native Resolution	WXGA (1280 x 800)
Brightness	5,000AL
Contrast Ratio	5,000:1
Display Color	1.07 Billion Colors
Lens	F=2.45~3.07, f=15.78 ~ 25.12
Aspect Ratio	Native 16:10 (5 aspect ratio selectable)
Throw Ratio	1.12~1.8
Image Size (Diagonal)	60"~240"
Zoom Ratio	1.6X
Lamp Type	370W
Lamp (Normal/Economic Mode)*	2000/2500 hours
Keystone Adjustment	2D, Vertical & Horizontal ± 30 degrees
Projection Offset	105% ±2.5%
Lens Shift	Vertical: +2.5%
Resolution Support	VGA(640 x 480) to UXGA(1600 x 1200)
Horizontal Frequency	15K~102KHz
Vertical Scan Rate	24~120Hz
Compatibility	HDTV Compatibility: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p Video Compatibility: NTSC, PAL, SECAM
Interface	Computer in (D-sub 15pin) x 1 (Share with component) Monitor out (D-sub 15pin) x 1 Composite Video in (RCA) x 1 S-Video in (Mini DIN 4pin) x 1 HDMI x 2 (One with MHL) Audio in (Mini Jack) x 1 Audio L/R in (RCA) x 1 Audio out (Mini Jack) x 1 Speaker 20W LAN (RJ45) x 1 (LAN control) USB (Type Mini-B) x 1 (Download) USB (Type A) x 1 (5V/ 1.5A Power Supply) RS232 (DB-9pin) x 1 DC 12V Trigger x 1 IR Receiver x 2
Dimensions (WxHxD)	16.1" x 4.6" x 10.5" / 411.4x118.4x267.5 mm
Weight	10.8 lbs / 4.9kgs
Power Supply	AC100 to 240 V, 50 to 60 Hz
Power Consumption	Typical 490W, Network standby <6W, Standby power <0.5W
Power Management Function	Automatic power off after 20 minutes without a display source.
Audible Noise	36/33 dBA (Normal/Economic mode)
Languages	(28 Languages)
Picture Mode	Bright/Presentation/sRGB/Cinema/(3D)/User 1/User 2
Accessories (Standard)	Remote Control w/ Battery, Power Cord, User Manual CD, Quick Start Guide, Warranty Card, VGA(D-sub 15pin) Cable
Accessories (Optional)	Spare Lamp Kit P/N: 5J.JDP05.001 Ceiling Mount P/N: 5J.JAM10.001 3D Glasses P/N: 5J.J9H25.001 QP01 Qcast dongle P/N: 5J.JCK28.A01
UPC / Part #	8400460-3266-1 / 9H.JDR77.15A
Limited Warranty	3 Years Parts/Labor; 1 Year or 2,000 hours of lamp life

Input and Output Terminals

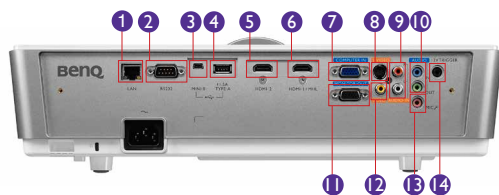

- | | |
|-----------------------------|------------------------------|
| 1 LAN (RJ45) | 8 S-Video in (Mini DIN 4pin) |
| 2 RS232 (DB-9pin) | 9 Audio L/R in (RCA) |
| 3 USB (Type Mini B) | 10 Audio in/out (Mini Jack) |
| 4 USB (Type A) | 11 Monitor out (D-sub 15pin) |
| 5 HDMI-2 | 12 Composite Video in (RCA) |
| 6 HDMI-1 / MHL | 13 MIC |
| 7 Computer in (D-sub 15pin) | 14 12V Trigger |



*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.