

MW864USTi Digital Projector

MW864UST Features


- Inner Reflection Design
- Dual HDMI Port (MHL Supported)
- Optional PointWrite Interactive Capability
- Corner Fit Image Correction.
- PointWrite Interactive - Pens or Fingers
- Wall Mount Included






PW2IU
optional interactive
module



PT12
optional touch module

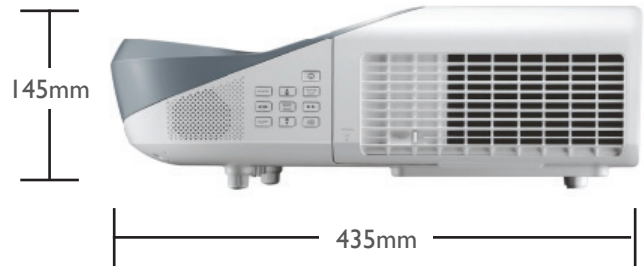

Wall Mount chart

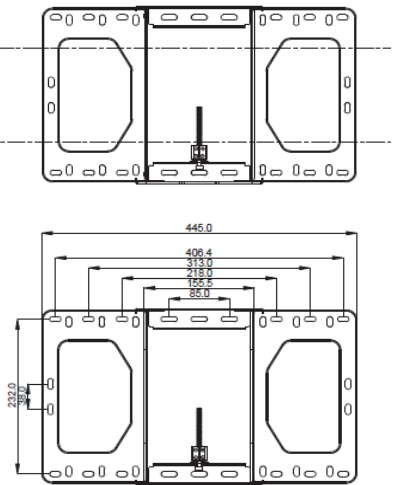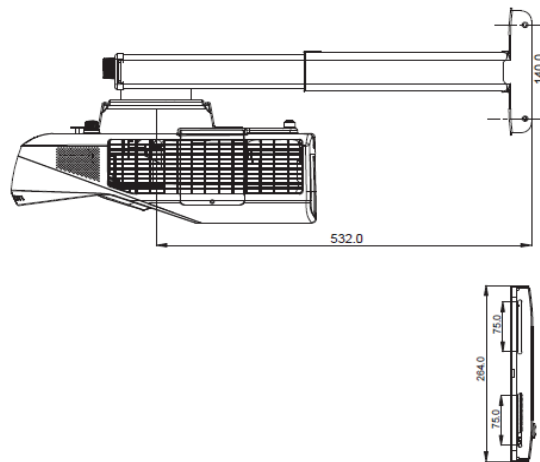

Because it matters

SPECIFICATIONS		MW864USTi		
Projection System	DLP®			
Native Resolution	WXGA(1280x800)			
Brightness	3300AL			
Contrast Ratio	13,000:1			
Display Color	1.07 Billion Colors			
Lens	F=2.4, f=3.35mm			
Aspect Ratio	Native 16:10 (5 aspect ratio selectable)			
Throw Ratio	0.23			
Image Size	87"-120"			
Zoom Ratio	Fix			
Lamp Type	240W			
Lamp(Normal/Economic/SmartEco Mode)*	3000/4000/6000 hours			
Keystone Adjustment	2D, Vertical ± 30 degrees, Horizontal ± 25 degree			
Other Image Adjustment	Corner fit			
Projection Offset**	115% (Full-Height)			
Resolution Support	VGA(640 x 480) to WUXGA_RB(1920 x 1200) *RB-Reduced Blanking			
Horizontal Frequency	15~102KHz			
Vertical Scan Rate	23~120Hz			
Compatibility	HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p		
	Video Compatibility	NTSC, PAL, SECAM		
Interface	PC in (D-sub 15pin)	x 2 (Shared with component)		
	Monitor out (D-sub 15pin)	x 1		
	Composite Video in (RCA)	x 1		
	S-Video in (Mini DIN 4pin)	x 1		
	HDMI/MHL	x 2 (HDMI 2 with MHL)		
	Audio in (Mini Jack)	x 2		
	Audio out (Mini Jack)	x 1		
	Audio L/R	x 1		
	Speaker	10W x 2		
	USB (Type mini B)	x 2		
		USB min B-1(Rear):	PointWrite Camera	
		USB min B-2(Rear):	FW download	
	USB(Type A)	x 1 (5V/1.5A power supply)		
	RJ45	x 1 (LAN Control)		
	RS232 (DB-9pin)	x 1		
	IR Receiver	x 1 (Front)		
Physical	Dimensions (W x H x D)	382*145*435 mm		
	Weight	6.2KG (w/o wall mount)		
Power	Power Supply	AC100 to 240 V, 50 to 60 Hz		
	Power Consumption	Max 410W, Network standby <2W. Standby <0.5W		
Audible Noise (Normal/Economic)	35/29 dBA (Normal/Economic mode)			
On-Screen Display Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)			
Accessories	Standard		Optional	
	Remote Control w/ Battery	RCS011	Spare Lamp Kit	
	Power Cord (by region)	x 1 (3M)	Wall Mount	WM03G5
	User Manual CD	NA (Download)	3D Glasses	DGD5
	Quick Start Guide	x 1	Document Camera	S30
	Warranty Card (by region)	x 1	PointWrite kit	PW21U
	VGA(D-sub 15pin) Cable	x 1	PointWrite Touch module	PT12
	Wall mount kit (installation guide)	x 1		

** Lamp life results will vary depending on environmental conditions and usage.

Actual product's features and specifications are subject to change without notice.

** offset is calculated by full screen heigh.

*** The measurement of offset and installation chart have max to 5% tolerance and may vary from the Actual size."