

Key Features


True 4K UHD | Bright Images Anywhere | Gaming on
4K UHD Big Screen | Images with More Depth |
Advanced Image Processor



Product Description


The PX747-4K is a high brightness 3500 ANSI Lumens 4K UHD projector for living room entertainment. Packed with 3500 ANSI Lumens of brightness, this projector is guaranteed to project high quality images in any lighting. PX747-4K leverages the latest XPR technology to project 8.3 megapixels of true 4K UHD resolution for maximum big screen detail. The projector supports HDR enhanced content to produce highly detailed images with more information in the darker and brighter part of a scene for an unmatched viewing experience. Dual HDMI inputs offer quick connection to an array of devices, while the integrated USB power supply can be used as a power source for connected dongles and devices.



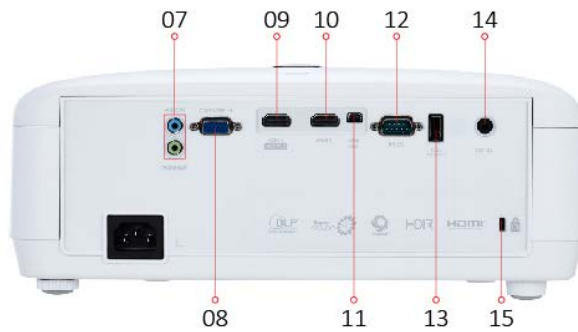

1. Power key & Top IR
2. Keypad
3. LED indicator
4. Front IR
5. Zoom/Focus
6. Projection lens
7. Audio in/out
8. Computer in
9. HDMI 1 (HDCP 2.2)
10. HDMI 2
11. Mini USB for service
12. RS232
13. USB 5V/1.5A out
14. 12V Trigger
15. Kensington lock

Visit Us

 www.viewsonic.com

SPECIFICATION

Projection system:	0.47" 4K UHD
Native Resolution:	3840x2160
DC type:	DC3
Brightness:	3500 ANSI Lumens
Contrast Ratio with SuperEco mode:	12000:1
Display Colour:	1.07 Billion Colours
Light Source:	Lamp
Light source life (Nor/SuperEco):	4000/15000
Lamp Watt:	240W
Lens:	F=1.94-2.06, f=15.57-18.67mm
Projection Offset:	120%+/-6%
Throw Ratio:	1.47-1.76
Image size:	30" - 300"
Throw Distance:	0.97m-11.69m (100"@3.26m)
Keystone:	±40° (Vertical)
Optical Zoom:	1.2x
Audible Noise (Eco):	27dB (Silence mode)
Resolution Support:	VGA (640 x 480) to 4K (3840 x 2160)
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p, 2160p
Horizontal Frequency:	15K~135KHz
Vertical Scan Rate:	23~120Hz

INPUT

Computer in (share with component):	1
Audio-in (3.5mm):	1
HDMI (HDCP):	2 (HDMI 2.0/HDCP2.2 x1, HDMI1.4/HDCP 1.4 x1)

OUTPUT

Audio out (3.5mm):	1
Speaker:	10W

USB type A (Power):	1 (5V/1.5A)
---------------------	-------------

12V Trigger:	1
--------------	---

CONTROL

RS232:	1
--------	---

USB type mini B (Services):	1
-----------------------------	---

OTHERS

Power Supply Voltage:	100-240V+/- 10%, 50/60Hz AC
-----------------------	-----------------------------

Power Consumption:	Normal: 330WStandby: <0.5W
--------------------	----------------------------

Operating Temperature:	0~40°C
------------------------	--------

Carton:	Color
---------	-------

Net Weight:	4.2kg
-------------	-------

Dimensions (WxDxH) w/adjustment foot:	332x261x135mm
---------------------------------------	---------------

Language:	English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, Arabic, Vietnamese
-----------	---

STANDARD ACCESSORY

Power Cord:	1
-------------	---

VGA cable:	1
------------	---

Remote Control:	1 (with backlit)
-----------------	------------------

QSG:	1
------	---

OPTIONAL ACCESSORY

Lamp/Light Source:	RLC-117
--------------------	---------

Copyright © ViewSonic Corporation 2000-2018. All rights reserved. (04/21/2018 16:24:37 Europe/London)