ULTRA SHORT THROW MULTIMEDIA LASER PHOSPHOR PROJECTOR

ZW300UST



Brilliant laser projection for rooms of any size





3200 lumens and 22,000:1 Contrast Ratio produce bright, striking imagery along with razor sharp text



PC Free USB Media Player supports playback of video and audio files along with shared images and presentations



Extensive I/O Connectivity with Dual HDMI featuring MHL, VGA-In, RJ-45, 2x Audio-In and USB Power



Powerful 10-Watt speakers enhance presentations and fill every room with crisp audio



Laser Phosphor Light Source provides 20,000+ hours of light source expectancy



HDMI MHL port supports popular HDMI dongles including Optoma's HDCast Pro, Chromecast, FireTV & more





















Equipped with state-of-the-art laser phosphor display technology, the Optoma ZW300UST showcases superior picture quality and enhanced color performance to provide unsurpassed imagery in spaces large and small. Producing rich colors and deep black levels that outperform traditional lamp-based projectors, the ZW300UST's solid-state laser light source provides 20,000+ hours of virtually maintenance-free operation.

With a throw ratio of .27, the WXGA ZW300UST can display a large 115" image from only 19" away, making it ideal for use in space-constrained environments including small classrooms, meeting rooms, boardrooms and digital signage applications. Allowing for presentations to transition from external sources seamlessly, the ZW300UST's PC Free USB Media Player supports playback of video and audio files along with images and presentations shared directly from any USB device.

Featuring a powerful 10-watt speaker, the ZW300UST enhances presentations, videos and audio files by delivering crisp, robust audio. In addition, streaming and presenting is made easy with an MHL-powered HDMI port that supports popular dongles including Optoma's HDCast Pro and Amazon's FireTV. The USB port can also be used to power Optoma's WHD200 Wireless HDMI system or Google's Chromecast media dongle.

CONNECTIVITY (May require optional accessories)



ULTRA SHORT THROW MULTIMEDIA LASER PHOSPHOR PROJECTOR — ZW300UST

OPTICAL/TECHNICAL SPECIFICATIONS

Display Technology	Single Texas Instrument DMD, 12 degree .65" DMD X1, Type S600, DC3
Native Resolution	WXGA 1280x800
Maximum Resolution	WUXGA 1920x1200
Brightness	3200 Lumens
Contrast Ratio	22,000:1
Displayable Colors	1.07 Billion
Light Source Life and Type*	Up to 20,000 hrs - Laser Phosphor
Projection Method	Front, rear, ceiling mount, table top
Keystone Correction	±40° Vertical
Uniformity	80%
Offset	120% ±3%
Aspect Ratio	16:10 (native), 16:9, 4:3, Auto
Throw Ratio	0.27:1
Projection Distance	19.4"– 27"
Image Size	85" - 115"
Projection Lens	F=2.5~ 3.26, f=20.91 ~ 32.62 mm manual focus
Digital Zoom	0.8 to 2.0
Audio	10 Watt Speaker
Noise Level	32dB
Remote Control	Full Function Remote
Operating Temperature	41–104°F (5–40°C), 85% max humidity
Power Supply	AC input 90 – 264V, 50–60 Hz
Power Consumption	335W (Bright), 225W (ECO)
High Altitude	Operating Temp @ Sea Level to 10000 feet = 23C (max); must manually switch to high altitude mode @ 5000 feet & above (using OSD)


COMPATIBILITY SPECIFICATIONS

PC Free USB Media Player and Office Document Viewer	Supports playback of video files, audio files, and viewing of Office Documents and PDF files via USB 2.0 and USB 3.0 Flash Disks and Drives
PC Free USB Media Player Video Codecs and Containers	H.264, H.263, VC-1, MPEG-1/2/4, DIVX-3/4/5/6, XVID, WMV7/8, VP8,VP6, AVS, MKV
PC Free USB Media Player Audio Codecs and Containers	MP3, WMA, OGG, FLAC, APE, ATRA
PC Free USB Media Player Image formats	JPEG, GIF, BMP
PC Free Office Document and PDF Viewer formats	Word Documents (.doc, .docx), Excel Spreadsheets (.xls, .xlsx), PowerPoint Presentations (.ppt, .pptx), Adobe Acrobat files (.pdf)
Computer Compatibility	SVGA, VGA, SXGA, UXGA, XGA,WXGA, HD, Mac
Video Input Compatibility	NTSC, PAL, SECAM, SDTV 480i/p, 576i/p, HDTV 720p(50/60Hz), 1080i(50/60Hz), 1080P(50/60Hz)
3D Compatibility [†]	Supports all HDMI 1.4a mandatory 3D formats (Frame pack, side-by-side, top-bottom) and up converts frame rate from 60Hz to 120Hz or 24Hz to 144Hz (i.e. 60 or 72 frames per eye). 3D glasses are needed and are sold separately. Refer to user manual for details.
Vertical Scan Rate	24~ 85 Hz (120Hz for 3D feature)
Horizontal Scan Rate	15.375~91.146 KHz
User Controls	Complete on-screen menu adjustment in 18 languages
I/O Connection Ports	2xHDMI with MHL, VGA-In, VGA-Out, Video in 2xAudio in (3.5mm/RCA audio), Mic-In (3.5mm), VGA Out, Audio out (3.5mm), RS232, USB-A (Power), USB-B (Service), RJ45 (LAN)
Loop Through (Audio)	Yes

PHYSICAL SPECIFICATIONS

Security	Kensington® Lock Port, security bar and keypad lock
Weight	12.3lbs
Dimensions (W x H x D)	15" x 5" x 12.5"

^{*}Light source life is dependent upon many factors, including brightness mode, display mode, usage, environmental conditions and more. Light source brightness can decrease over time.

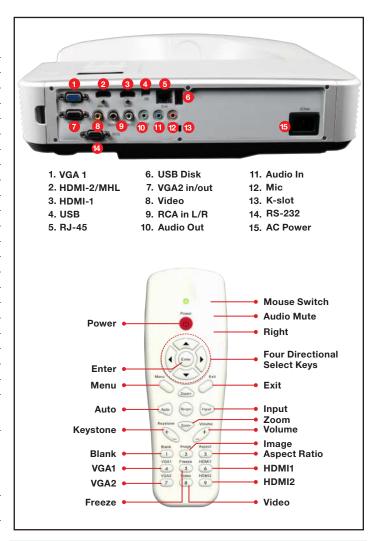

Warranty

3 year or 20,000 Hour Light Source Warranty (whichever comes first) /3-year Optoma Express Advance Exchange Warranty

What's in the Box

ZW300UST, AC power cord, VGA to VGA cable, remote control, batteries for remote, multilingual CD-ROM user's manual, quick start card, and warranty card

Optional Accessories

Universal ceiling mount, DLP®Link™ 3D glasses, Wireless HDMI system, Remote

Accessory Part Numbers

Remote: BR-3080N Ceiling mount: OWM3000, OWM2100 DLP®Link™ 3D glasses: ZD302 Wireless HDMI system: WHD200

UPC 796435 44 089 3



www.OptomaUSA.com

^{†3}D content can be viewed with DLP Link active shutter 3D glasses when projector is used with a compatible 3D player. Please visit www.OptomaUSA.com for more information.