


**SANYO**  
PLC-SE10



**LCD projector**  
**Portable Multimedia**  
*designed for education...*

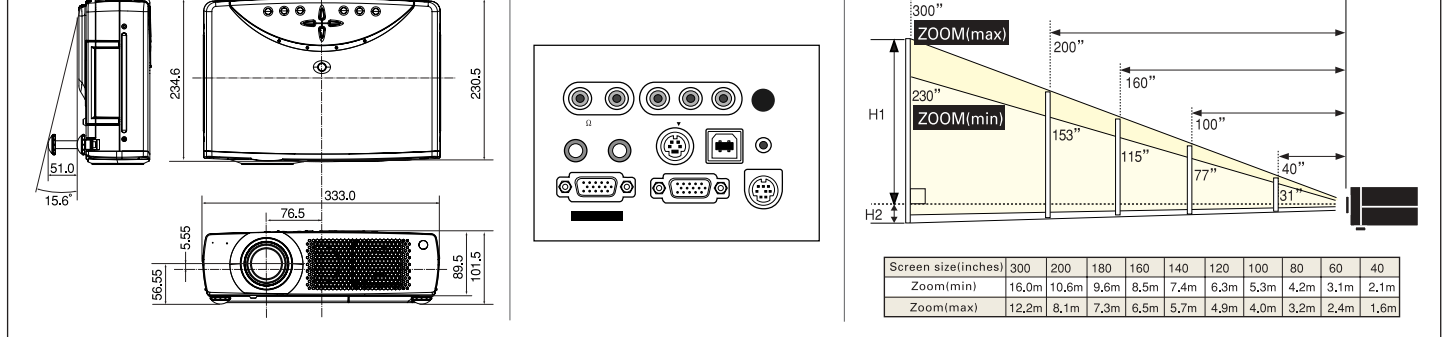

### Bright, quality images

The SE10 delivers 1200 ANSI lumens for extremely bright, high-quality images making it suitable for use in many classrooms and other training and presentation environments. The ideal partner for interactive whiteboards!

### Style and durability

The SE10 is not only very stylish but has been built to very high levels of quality including its metal alloy casing. This makes it an extremely durable and reliable product that is suitable for prolonged use in harsh environments. Its portability makes it equally suitable for desktop use or ceiling mount installation.

### Low cost of ownership

4000 hour lamp-life and a single 'super' air filter enable both long-lasting, high quality performance and minimal maintenance.

### Easy set-up, multiple connectivity

One-touch Auto PC Adjust function allows minimum set-up time whilst multiple connectivity options enables easy connection to PC, VCR, DVD etc.

### Horizontal AND Vertical Keystone Correction

Provides increased flexibility for installation, ensures a distortion free picture regardless of the positioning of the projector.

## TECHNICAL SPECIFICATIONS

Model name	Sanyo PLC-SE10
Panel	0.9 inch TFT p-Si x 3
Resolution	SVGA (800 x 600 dots)
No. of pixels	1,440,000
Projection lamp	132 W UHP
Lamp life (50% survival)	4000 hours
Brightness	1200 ANSI lumens
Uniformity	85% (corner to centre)
Projection lens (standard)	F1.7~2.0, f=37.4 ~ 48.3 mm
Screen size	31" ~300" (100" at 4.0 - 5.3m)
Zoom focus	1:1.3 motor driven
HDTV signals	480i, 480p 575i, 575p, 720p, 1035i and 1080i
Colour systems	PAL/ SECAM/NTSC/NTSC4.43/PAL-M/N
Computer inputs	Analogue RGB (D-sub 15 pin) • Audio (stereo mini-jack)
Video inputs	3 RCA video (Y- Pb/Cb - Pr/Cr) • S-Video • Audio (stereo mini-jack)
Computer compatibility	SXGA/XGA/SVGA/VGA/MAC
Other terminals	External audio outputs (stereo mini-jack) • Monitor output (D-sub 15 pin) • Control mini DIN 8 pin and USB (B type)
Presentation tools	Freeze / Digital Zoom / No show
Keystone correction	+20° -20° horizontal and vertical
Scanning frequency	H/V sync~80kHz, ~100Hz Dot clock 100MHz
Sound output	1.0W Mono
Fan noise	<34dB
Voltage	100V -240V AC (auto voltage)
Dimensions (W x H x D)	333 x 89.5 x 230.5mm (not including adjustable feet)
Weight	3.9 kg (8.6 lbs)
Standard accessories	AC power cord (2 metres) • Card type (Option - Mouse remote) • RGB cable