



CINEO™ MkII and MkIII. The optimal range of DLP™ e-cinema projectors!

The CINEO™ range was designed to meet the challenges of the emerging e-cinema market, offering a competitive, genuinely film-like experience in retrofitting existing cinemas as well as for new multiplex venues. Based on the award-winning DLP™ technology from Texas Instruments, famous for its high end digital DLP™ CINEMA, the CINEO™ range offers the best combination of value and performance, enabling the deployment of e-cinema into mainstream theatres.

Unlike other (LCD) technologies, the CINEO™ DLP™ technology offers seamless images with correct skin tones, and uniform colors, without the convergence errors, pixellation, lifetime-issues and other artifacts that competing (LCD) solutions suffer from.

The introduction of CINEO™ e-cinema projectors facilitates rapid distribution of new releases to a virtually unlimited number of theatres simultaneously. There is no longer need for costly and time-consuming film printing, and scratches and wear become a thing of the past.

Built in content protection (HDCP™) over DVI (Digital Versatile Interface) ensures an all-digital, copy-protected, high quality link to the film server.

The CINEO™ is highly flexible in terms of choice of zoom optics and configurability in the theatre. Using the special e-cinema functions in the menu system, like horizontal and vertical keystone correction, cropping and digital zoom, the CINEO™ can be set up in the actual theatre environment to project the image precisely on the screen.

Main Features

- 1280 pixel filmlike horizontal resolution
- 3000:1 B/W contrast for deep blacks and dynamic image
- Bright, saturated colors
- Scope and wide formats
- Flicker-free - no more 24fps artifacts
- In-theatre configurable for simple set-up, no need for pre-setup
- MkII standard and MkIII long throw zoom lenses fit most theaters
- Easy and low cost lamp replacement
- Low power, energy efficient design - only 350W total power consumption
- Long life DLP™ technology for life-like images
- Digital DVI interface to film server with HDCP™ anti-piracy protocol






Specifications

parameter	MKII	MKIII	connectivity	composite	composite
part number				super video	super video
technology	DLP™ - DARK METAL	DLP™ - DARK METAL		RS 232	RS 232
resolution	1280 pixels	1280 pixels		USB	USB
contrast	3000 : 1 (max)	3000 : 1 (max)		external IR	external IR
throw ratio	1.75 - 2.25 : 1	2.5 - 3.5 : 1	power requirements	100 - 240 VAC, 50 / 60 Hz,	100 - 240 VAC, 50 / 60 Hz,
lens offset	16%	16%		350 W power consumption	350 W power consumption
aspect ratios	- scope - wide - flat	2.35 / 2.4 : 1 1.78 : 1 1.33 : 1	Dimensions	244 x 278 x 88 mm	244 x 320 x 130 mm (max)
throw distance	10 - 40m / 30 - 120 ft	10 - 60m / 30 - 180 ft	weight	9.6 x 10.9 x 3.5 inch.	9.6 x 12.6 x 5.2 inch. (max)
lamp	250W UHP™, 2000 hours (typ)	250W UHP™, 2000 hours (typ)	temperature	3.0 kg / 6.5 lbs	5.0 kg / 10.9 lbs
connectivity	VGA DVI HDCP component	VGA DVI HDCP component	humidity	0 - 40° C / 32 - 104° F	0 - 40° C / 32 - 104° F
			conformance	20 - 90 % RH	20 - 90 % RH
			warranty	CE, CSA "C/US", FCC Class A	CE, CSA "C/US", FCC Class A
			lamp warranty	2 years	2 years
				90 days / 500 hours	90 days / 500 hours

specification are subject to change without prior notis

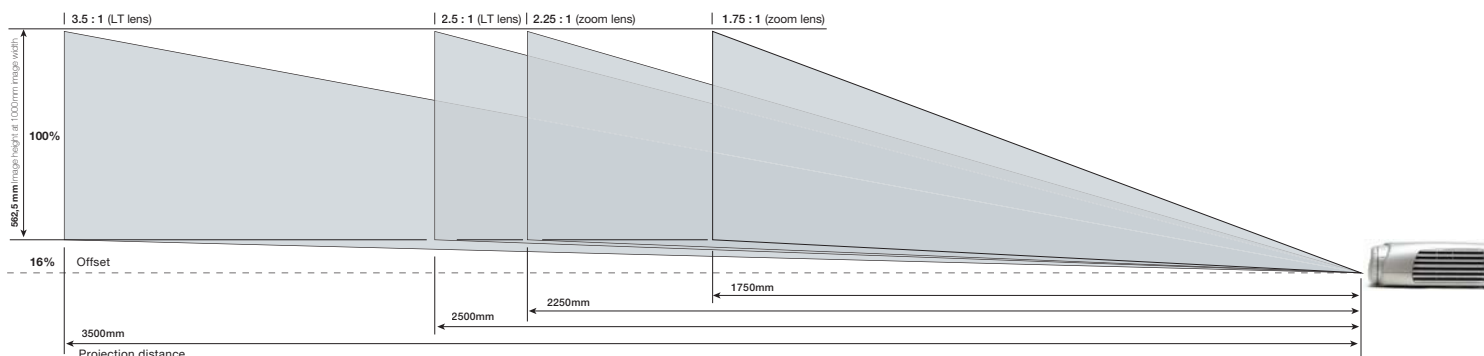

Award for
Design Excellence
Awarded by the
Norwegian Design Council



Designed and
manufactured
in Norway

All brands and trade names are the property of their respective owners. Specifications subject to change without prior notice. All values are typical and may vary. Patent pending on lamp and cooling system.

cineo@projectiondesign.com • www.projectiondesign.com • tel: +47 69 30 45 50 • fax: +47 69 30 45 80