



**MITSUBISHI  
ELECTRIC**

MULTIMEDIA DATA/VIDEO PROJECTORS

*Changes for the Better*

Projection precision,  
to present for success.



**NEW**

**XL6U**

MOBILE XGA PROJECTOR

**5000h**

Long Life Lamp  
with lamp low mode

**1700lm**

Brightness

**1.9m**

Short Throw Lens (60")





# XL6U

MOBILE XGA PROJECTOR




## Specifications

Model	XL6U
Display technology	0.7"Polysilicon TFT LCD×3
Resolution	786,432 pixels×3(total 2,359,296 pixels)
Brightness	1700lm
Contrast	400 : 1(on/off)
Picture Size	40"~300"(100"=3.2m)
Source lamp	160W (Shut Off Time 5000Hrs) with Low Mode 200W (Shut Off Time 2000Hrs)
Computer compatibility	640×400~1280×1024 True: 1024×768, Sync on green available
Video compatibility	NTSC/NTSC4.43/PAL(including PAL-M, N)/ SECAM/PAL-60, Component Video (480i,576i,480p, 576p,720p,1080i),SCART(RGB+1V sync)
PC input terminals	PC: mini D-sub 15pin×2
Video input terminals	Video: RCA×1+S-video×1, Audio: RCA (L,R)×1
Output terminals	RGB: mini D-sub 15pin×1, DC Out: 5V 1.5A(MAX)
Communication terminals	RS-232C(8pin)×1, USB terminal for mouse control×1
Audio speaker	2W mono
Dimension (W×H×D)	275×70×261mm (excluding height adjustment)
Weight	2.7kg / 5.9lbs
Power supply	AC100 - 240V / ±10%, 50/60Hz
Optional lamp	VLT-XL5LP


\*All brand names and product names are trademarks, registered trademarks or trade names of their respective holders.

## Input and Output Terminals

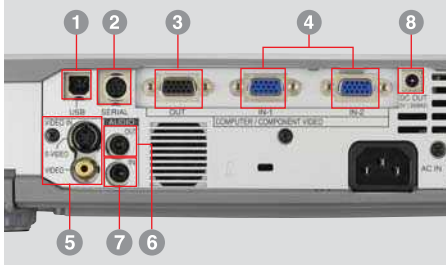


- 1 USB terminal for mouse control
- 2 Serial terminal RS-232C(8pin)
- 3 PC / Component Video output (mini D-sub 15pin)
- 4 PC / Component Video input (mini D-sub 15pin)
- 5 S-Video / Video
- 6 Audio output
- 7 Audio input
- 8 DC Out 5V 1.5A(Max)

## Dimensions

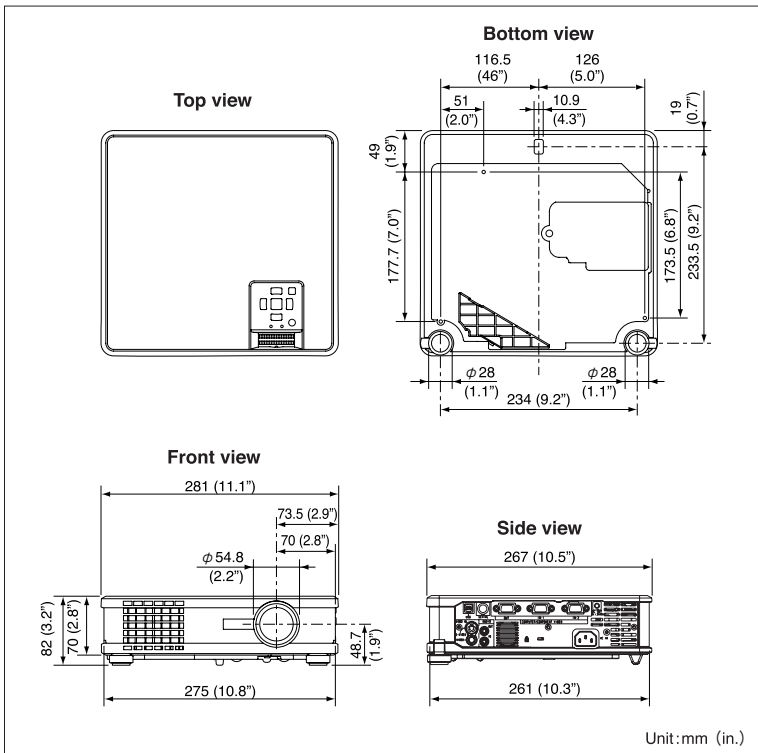

## Screen size and Projection distance

As seen from the side

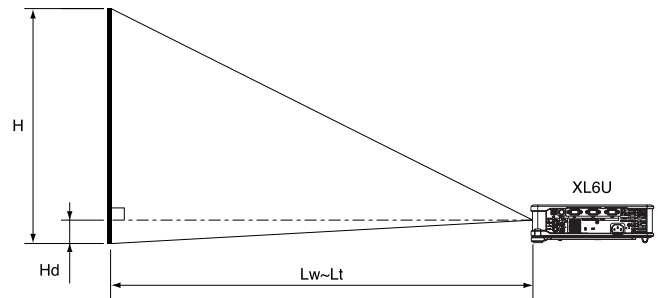

## Screen size chart (4:3 aspect ratio)

Screen		Distance from screen (L)				Height projected image (Hd)					
Diagonal size	Width (W)	Height (H)	Maximum Zoom	Minimum Zoom	inch	cm	inch	cm			
40	102	32	81	24	61	49	1.3	60	1.5	2.4	6
60	152	48	122	36	91	75	1.9	91	2.3	3.6	9
80	203	64	163	48	122	101	2.6	121	3.1	4.8	12
100	254	80	203	60	152	126	3.2	152	3.9	6.0	15
150	381	120	305	90	229	191	4.8	229	5.8	9.0	23
200	508	160	406	120	305	255	6.5	306	7.8	12.0	30
250	635	200	508	150	381	319	8.1	383	9.7	15.0	38
300	762	240	610	180	457	383	9.7	-	-	18.0	46

The above numbers are approximate, and may be slightly different from the actual measurements.

**MITSUBISHI ELECTRIC CORPORATION**  
 HEAD OFFICE : TOKYO BLDG., 2-7-3, MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN

To find out more about XL6U and our projectors, visit us at

[Global.MitsubishiElectric.com/projectors/](http://Global.MitsubishiElectric.com/projectors/)