

TOSHIBA



Exceptional talents with a great appreciation of colours.

x2000

- With detachable control panel
- High security (password function and panellock)
- Easy set-up and "easy to use"




LCD stands for
Liquid Cristal Display



x2000

Immerse yourself
in a world of colour.

- Display** 0,61" LCD Chip
- Resolution** XGA 1,024 x 768
- Brightness** 2,000 ANSI-lumens
- Colour reproduction** 16.7 mio. colours
- Contrast** 600 : 1
- Projection format** 4 : 3 switchable to 16 : 9
- Lamp** 180 W (TLPLW11LAMP)
- Max. lamp life** up to max. 2,000 hours/
um to max. 3.000 hours in ECO mode
- Lens** F = 1.6 - 1.89 / f = 18.6 - 22.3 mm, manual zoom and focus
- Zoom** 1.2 x
- Frequency (hor./vertical)** 16 - 106 kHz / 50 - 85 Hz
- Projection** front, rear and ceiling
- Digital keystone correction** auto vertikal +/- 30°
- Picture size (diagonal)** 0.84 m - 7.62 m
- Projection distance** 1.19 m - 9.13 m
- Input signals** NTSC / PAL / SECAM, 480i, 480p, 576i, 576p, 720p, 1,080i, VGA / SVGA, XGA / SXGA / UXGA (compr.)
- Inputs** RGB (D-sub 15), S-video, composite video (1 x RCA), RGB audio (stereo mini jack), video / S-video audio (1 x RCA L/R)
- Outputs** RGB (D-sub 15), audio (stereo mini jack)
- Serial interface** RS-232C (mini DIN8 pin)
- Power supply** AC 100 - 240 V, 50 / 60 Hz
- Loudspeaker** 1 W mono
- Dimensions (W x H x D)** 288 x 92 x 247 mm
- Weight** 2.8 kg
- Operation noise** standard 34 dB / ECO mode 29 dB
- Specials** security-function, user logo, password, panellock, with detachable control panel, quick start / instant shut down (5 sec.), black board-function
- Accessories** mouse remote control with laserpointer and batteries, owners manual (CD ROM), quick reference, RGB and power cable, softcase
- Options** ceiling mounting, trolley, spare lamp, camera c001

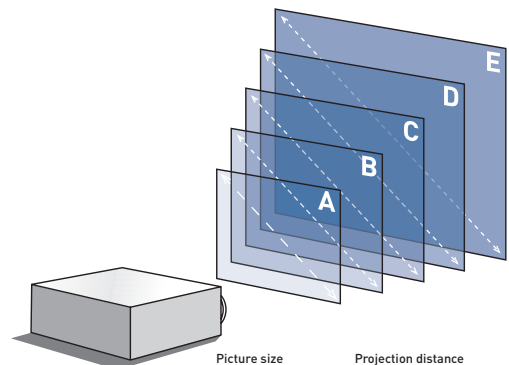

Picture size	Projection distance
A 0.84 m	1.19 m
B 1.52 m	1.8 - 2.18 m
C 2.54 m	3.02 - 3.64 m
D 5.08 m	6.08 - 7.31 m
E 7.62 m	9.13 m