


SPECIFICATIONS

Weight –
approx. 1.7 kg / 3.7 lbs. (EMP-1715 / 1705)
approx. 1.6 kg / 3.5 lbs. (EMP-1710 / 1700)

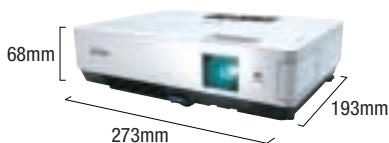

SUPPLIED ACCESSORIES

Power Cable 1.8 m
Computer Cable 1.8 m
USB Cable* 1.8 m
Remote Control With AAA Type Alkaline Batteries x 2pcs
Audio Adapter
Soft Carrying Case
Password Protect Sticker
Wireless LAN Unit with Screw*
EPSON Projector Software for Meeting & Presentation*
User's Manual

*Only for EMP-1715 / 1705

OPTIONAL ACCESSORIES

ELPLP38 (V13H010L38) Replacement Lamp
ELPAF08 (V13H134A08) Air Filter Set
ELPAP02 (V12H005M02) Ethernet Unit

PROJECTION DISTANCE

Diagonal Screen Size (inches)	Wide (cm)	Tele (cm)
30	99	119
40	133	160
60	200	240
80	267	321
100	335	402
200	672	807
300	1009	1211

Multimedia Projector


EMP-1715/1705 EMP-1710/1700

PART NUMBER		V11H228052	V11H231052	V11H230052	V11H232052
MODEL NUMBER		EMP-1715	EMP-1705	EMP-1710	EMP-1700
PROJECTION SYSTEM		RGB Liquid-Crystal Shutter Projection System			
SPECIFICATION OF MAIN PARTS		LCD	SIZE	0.7 Inch with MLA (x 3)	
			DRIVING METHOD	Polysilicon TFT Active Matrix	
			PIXEL NUMBER	786,632 Dots (1024 x 768) x 3	
			NATIVE RESOLUTION	XGA	
		PROJECTION LENS		Manual Focus & 1.2 x Optical Zoom	
				F=1.6 – 1.77 / f=23.8 – 28.5 mm	
		LAMP	TYPE	170 W UHE	
			LIFE*	2000 Hours (High Brightness Mode) / 3000 Hours (Low Brightness Mode)	
*These are not the guaranteed number of lamp hours, but the recommended hours after which the lamp should be replaced in order to ensure optimum picture quality					
SCREEN SIZE (PROJECTED DISTANCE)		30 to 300 Inch (1.0 to 12.1 m)			
BRIGHTNESS		HIGH BRIGHTNESS MODE	2700 ANSI lm	2200 ANSI lm	2700 ANSI lm
		LOW BRIGHTNESS MODE	2100 ANSI lm	1700 ANSI lm	2200 ANSI lm
CONTRAST		400:1			
BRIGHTNESS UNIFORMITY		83%			
COLOUR REPRODUCTION		Full-Colour (16.77 Million Colours)			
SOUND OUTPUT		1 W Monaural			
EFFECTIVE SCANNING FREQUENCY RANGE (ANALOG)		PIXEL CLOCK	13.5 MHz to 162 MHz		
		HORIZONTAL	15 kHz to 92 kHz		
		VERTICAL	50 Hz to 85 Hz		
KEYSTONE CORRECTION		Vertical: -30 to +30 Degrees			
ANALOG RGB I/O		DISPLAY PERFORMANCE	NATIVE RESIZE VIDEO	1024 x 768 Dots	
		INPUT TERMINAL		1600 x 1200 1280 x 1024 800 x 600 640 x 480	
				D-Sub 15-Pin x 1	
VIDEO I/O		INPUT SIGNAL INPUT TERMINAL	VIDEO STANDARD VIDEO	NTSC / NTSC4.43 / PAL / M-PAL / N-PAL / PAL60 / SECAM	
				Composite Video: RCA (Yellow) x 1	
				S-Video: Mini DIN x 1	
				Component Video: D-Sub 15-Pin x 1	
				Video-RGB: D-Sub 15-Pin x 1	
AUDIO I/O		AUDIO TERMINAL		Stereo Mini-Jack x 1	Audio In or Out are Selectable on OSD Menu
					Audio In Only
CONTROL I/O		USB I/O TERMINAL		Type B x 1, Type A x 1	Type B x 1
NETWORK I/O		USB I/O TERMINAL		Type A x 1	N / A
OPERATING TEMPERATURE		5°C to 35° <41°F to 95°F>			
START-UP PERIOD		About 5 Seconds			
DIRECT POWER ON		Yes			
COOL-DOWN PERIOD		Instant Off			
POWER SUPPLY VOLTAGE		100 - 240 VAC ±10%, 50 / 60 Hz			
POWER CONSUMPTION		LAMP ON	228 W		
		STANDBY (NETWORK ON)	18 W		
		STANDBY (NETWORK OFF)	5.1 W		
DIMENSIONS (D X W X H)		193 x 273 x 68 mm (Excludes Feet)			
WEIGHT		Approx. 1.7 kg / 3.7 lbs.			Approx. 1.6 kg / 3.5 lbs.
FAN NOISE		35 dB (Low Brightness Mode)			

Epson is the registered trademark of SEIKO EPSON CORPORATION.

All other product names and other company names used herein are for identification purpose only and may be the trademarks or registered trademarks of their respective owners. Epson disclaims any and all rights in those marks. Scan/Print samples shown herein are simulations. Specifications are subject to change without notice.

EMP-1715 / 1705

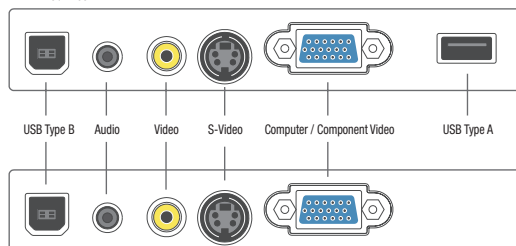

EMP-1710 / 1700

EPSON

EXCEED YOUR VISION

ProSelecta

View :: Compare :: Select - www.ProSelecta.com