


Ultra Bright Powerhouse

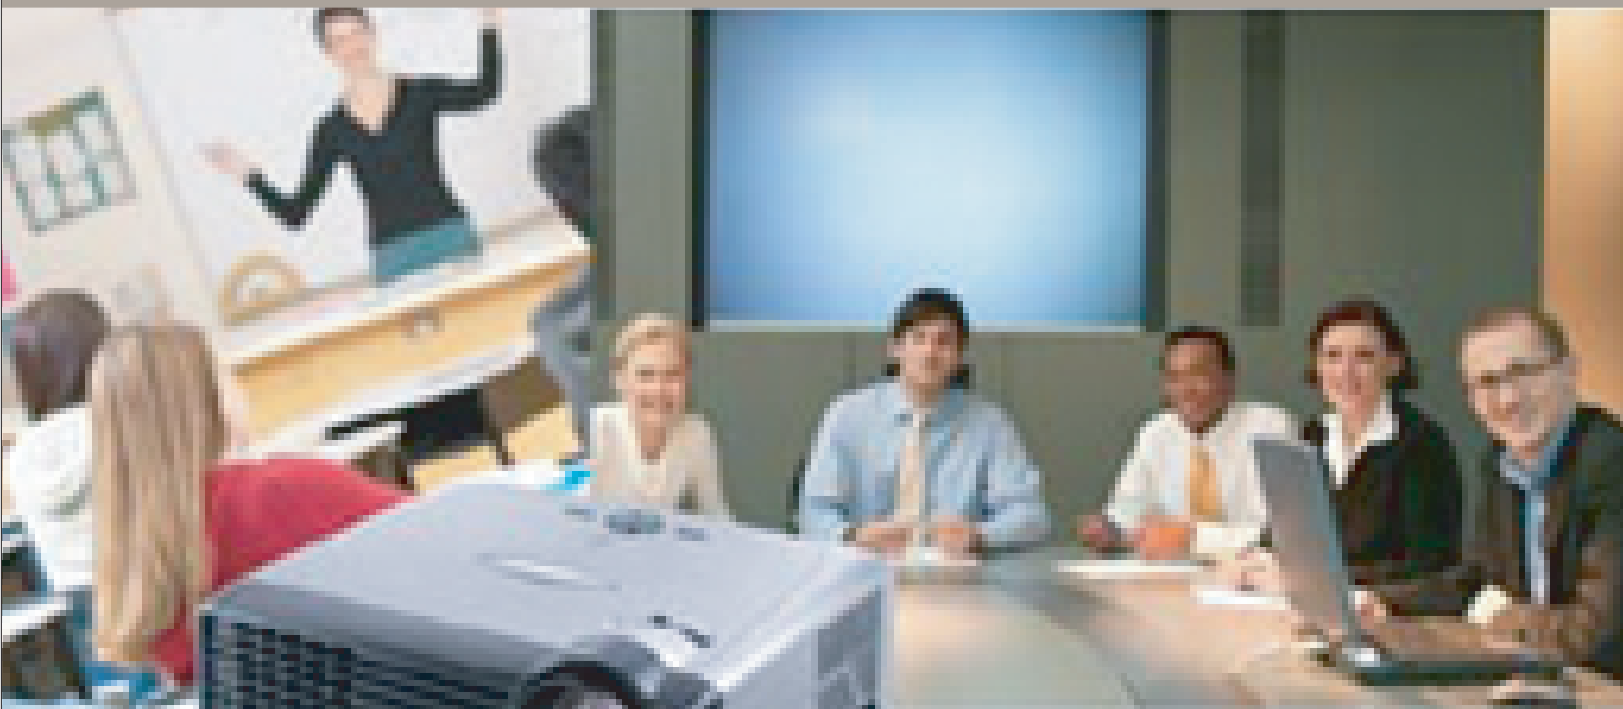


Price Performance Brilliance

Optoma's 2300 lumens EP719P is a versatile and portable multimedia projector. The EP719P is perfect for a wide range of environments from board rooms to classrooms. Designed for today's big screen multimedia demanding needs, this robust and compact DLP™ multimedia projector makes your high-quality presentations shine brightly.

- Native 1024x768 XGA resolution for sharp display
- Bright 2300 lumens for great image quality in a wide range of applications
- Superior 2500:1 contrast ratio for cinema quality image and crisp graphics
- SXGA+(1400x1050) resolution and HDTV compatibility
- Long Lamp Life:3000 hours
- HDTV compatible (720p, 1080i)
- Multi-connectivity 2 VGA, component, composite, and S-Video input
- Weighs 4.4 pounds
- Adjustable cooling fan speed settings for high altitude application.




Cutting-edge DLP™ Technology

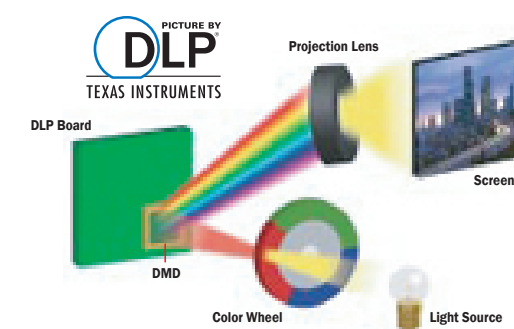


Improved Ventilation System



Remote Control

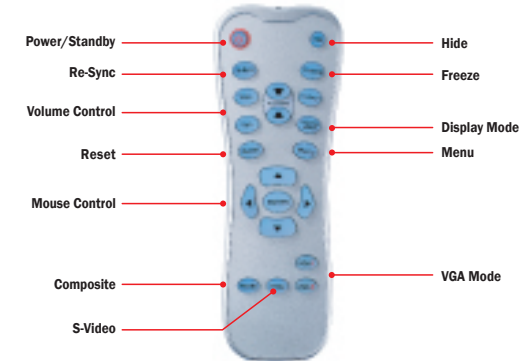

I/O Ports

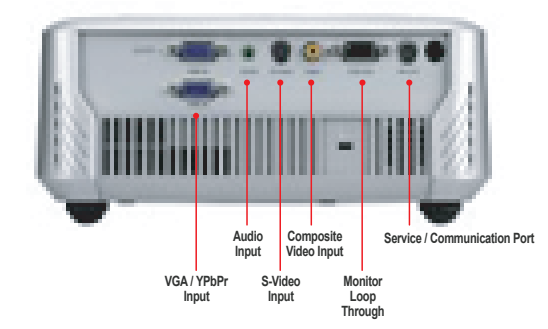

Specifications

Display Technology	0.55-inch Darkip2™ DLP™ technology from Texas Instruments
Resolution	Native: 1024 x 768 XGA, Max-Resize: 1400 x 1050+ (60Hz)
Brightness (typical)	2300 ANSI lumens
Contrast Ratio	2500:1 (full on/full off)
Lamp Life (typical)	2000 hours (STD)/3000 hours (ECO)
Throw Ratio	1.93 - 2.13:1 (distance/width)
Image Size	27.7 to 306 inches (0.7 to 7.77 meters)
Noise Level	28dB
HDTV Compatibility	720p, 1080i
Monitor Loop Through	VGA output (functional in both normal and standby modes)
Lamp Type	200W UHP lamp
Projection Distance	3.9 to 39.3 feet (1.2 to 12 meters)
Computer Compatibility	XGA, SVGA, VGA, VESA, Mac, SXGA+ Resized
Video Compatibility	NTSC/PAL/SECAM, SDTV (480i), EDTV (480p), SDTV (480i)
Aspect Ratio	4:3/16:9
Projection Lens	F=2.7 ~ 3.0; f=21.83 ~ 23.81mm 1:1.1 Manual Zoom and Focus
Audio	2-watt Mono speaker
Keystone Correction	Vertical ± 15°
Horizontal Scan Rate	31.5 to 100 KHz
Vertical Refresh Rate	56 to 85 Hz
Power Supply	AC Input 100-240V, 50 / 60 Hz, Auto-Switching Power supply
Power Consumption	265 watts (Maximum), <15 watts (standby mode)
Operating Temperature	41-95 °F (5-35 °C) (80% humidity maximum), Adjustable fan speed for high altitude application
Displayable Colors	16.7 million colors
Projection Method	Front/rear/ceiling-mount/table-top
Uniformity	85%
User Controls	Complete onscreen menu adjustments in 11 languages
I/O Connectors	VGA x2, VGA for monitor loop through, S-Video, composite video, audio minijack, Service/Communication Port
Standard Accessories	AC power cord, VGA to VGA, Composite Video, Remote Control, Battery for remote, Lens cap (hanging), Quick start guide, Warranty card, User's guide CD, and Carrying Case
Weight	4.4 pounds (2.0kg)
Dimensions (W x L x H)	9 x 8.26 x 3.7 inches (230 x 210 x 95 mm)

Available from:

