


# 3M™ Digital Projector X20



Need the brightness and clarity of a True XGA (1024 x 768) LCD projector in a lightweight model that you can take on-the-go? The 3M Digital Projector X20 may be just the right mobile solution you've been seeking. Weighing less than 4 lbs., this 2000 lumen, 4:3 aspect ratio projector delivers a crisp image from 30-300 inches – perfect for almost any office, classroom or small space screen. Easily connect your PC to one of the RGB inputs or go even lighter with a PC-less .jpg presentation using the featured USB port. You can even personalize your settings and increase your security with the many 3M X20 features. It's lighter and brighter at it's best.



3M™ Digital Projector X20

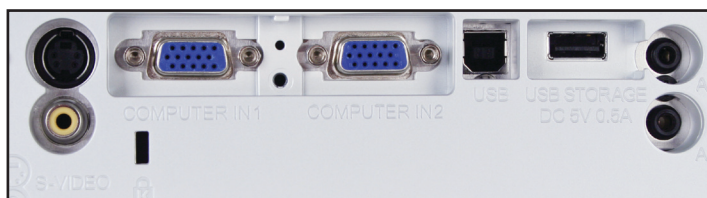

## Connections

Computer:	RGB (x2) input
USB:	USB for remote control mouse USB for PC-Less presentations
Video:	S-Video Video Composite
Audio:	Audio In: 3.5 mini jack (x1) Audio Out: 3.5 mini jack (x1)

## Features

- Picture Freeze, Blank and Magnify (4x)
- Security: PIN Code Lock, My Screen Lock, Transition Detector, Kensington Lock Bar
- Adjustable Picture Mode: Normal, Cinema, Dynamic, Whiteboard, Blackboard
- Custom personalization with *My Screen*, *My Button*, *My Memory* features

## Basic Specs

- 2000 lumens\*
- XGA (1024 x 768)
- 3.9 lbs /1.784 kg
- 500:1 Contrast Ratio
- Digital Keystone Correction
- Aspect Ratio: 4:3 native, 16:9 supported
- 3-Year Standard Warranty

Digital Projector X20: 78-9236-6922-6

\*indicates maximum lumens rating

1-800-328-1371

[www.3m.com/meetings](http://www.3m.com/meetings)



## Optical

Brightness:	2000 lumens*
Imager set:	0.063", P-Si TFT Panel
Resolution (native):	XGA (1024 x 768 pixels)
Aspect ratio:	4:3 native, 16:9 supported
Colors:	16.7 million
Screen size (range):	30-300 inches
Zoom/Focus:	Manual
Zoom ratio:	1:2:1
Projection lens: F (focal length):	F 1.8-1.9 (f=16.4 - 19.7 mm)
Optional lenses:	No
Contrast ratio:	500:1
Lamp:	160W UHB
Lamp Life:	2000 hours (normal), up to 3000 hours (whisper)

\*indicates maximum lumens rating

## Electrical

Video compatibility:	NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, SECAM
Component signal:	480i, 480p, 525i, 525p, 625i, 576i, 720p, 750p, 1080i, 1125i (through computer input ports)
Automatic Digital Keystone correction:	Fixed 6:1 upward shift; Vertical +/- 30°**
Audio:	1 x 1W
Noise level:	Normal 36dB, Whisper 30dB
Compatible resolution:	VGA, SVGA, XGA, SXGA, UXGA
Horizontal scan:	31.5-106 kHz
Vertical scan:	56-120 Hz
Power consumption:	250W
Power supply: Universal:	100-120V/220-240V, 50/60 Hz
Regulatory approvals:	UL, cUL, FCC Part 15 Class B, CE, EN60950, WEEE
Operating temperature:	41°-95°F (5°-35°C)
Storage temperature:	-4°-140°F (-20°-60°C)
Altitude:	Sea level to 6000 ft. (1,829 m)

\*\*The degrees specified are based on XGA resolution at 60 Hz input and zoom lens position is wide.



### Accessories Included

- Power cords (x3 - US, UK, Euro)
- RGB computer cable
- RCA/Stereo mini Audio Adapter
- Remote control with 2 AA batteries
- Multi-language User's Manual
- Multi-language Operator's Guide CD
- Lens cap
- Soft Carry Case

### Optional Accessories

- Ultra Value Warranty X20 (WX20) 78-6969-9904-0
- Replacement Lamp Kit (LKX20) 78-6969-9903-2
- Soft Rolling Bag 78-6969-9716-8
- Universal Ceiling Mount 78-6969-9874-5

## Size

Dimensions (W x H x D):	10.8 x 2.3 x 8.1 in (274 x 59 x 205mm)**
Weight:	3.9 lbs/1.784 kg

\*\*dimensions do not include elevator feet

(a) Screen size diagonal		4:3 screen							
		(b) Projection distance				(c) Screen height			
		min.		max.		down		up	
inch	m	m	inch	m	inch	cm	inch	cm	inch
30	0.8	0.8	30	0.9	36	7	3	39	15
40	1.0	1.0	40	1.2	48	9	3	52	21
50	1.3	1.3	50	1.5	61	11	4	65	26
60	1.5	1.5	61	1.9	73	13	5	78	31
70	1.8	1.8	71	2.2	85	15	6	91	36
80	2.0	2.1	81	2.5	97	17	7	105	41
90	2.3	2.3	91	2.8	110	20	8	118	46
100	2.5	2.6	102	3.1	122	22	9	131	51
120	3.0	3.1	122	3.7	147	26	10	157	62
150	3.8	3.9	153	4.7	183	33	13	196	77
200	5.1	5.2	204	6.2	245	44	17	261	103
250	6.4	6.5	255	7.8	306	54	21	327	129
300	7.6	7.8	306	9.3	368	65	26	392	154

## Warranties

Projector:	3 Years Standard
Lamp:	1 Year Prorated
Ultra Value Warranty Enhancement option available: Includes a free lamp, free loaner while unit is being repaired and expedited service.	
Available in US only. See <a href="http://www.3m.com/us/meetings/warranties">www.3m.com/us/meetings/warranties</a> for details on warranties.	

### Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

© 3M 2007 R011307

78-6970-8644-1

**3M Visual Systems**  
Building A147-5N-01  
6801 River Place Blvd.  
Austin, TX 78726-9000

**3M Canada**  
P.O. Box 5757  
London, Ontario, Canada  
NGA 4T1

**3M Mexico, S.A. de C.V.**  
Apartado Postal 14-139  
Mexico, D.F. 07070  
Mexico

### Warranty; Limited Remedy; Limited Liability

This product will be free from defects in material and manufacture for a period of 3 years from the date of purchase. **3M MAKES NO OTHER WARRANTIES OR CONDITIONS INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.**

Hg-LAMP CONTAINS MERCURY. Manage in accord with disposal laws. See [www.lamprecycle.org](http://www.lamprecycle.org) or call 1-800-328-1371 (USA), 1-800-364-3577 (Canada). For product disposal see [www.eiae.org](http://www.eiae.org)

(USA) or [www.epsc.ca](http://www.epsc.ca) (Canada).

Specifications subject to change without notice.

3M is a trademark of 3M Company. Used under license in Canada. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.

