



# Smart concept; Smart design

Friendly, Elegant & Compact



Light Output  
**2500 lm**

**Frontal Exhaust**

**Digital Connectivity**  
(only for EB-X8/W8)

**Auto Keystone**  
(only for EB-X8/W8)

W8/X8/S8 offers not just a stylish new design, but great performance as well. Its 2500 lumens allows for use in bright light conditions. Several digital connection possibilities broaden its compatibility with computers, games and DVD players.

- AV Mute Slide Lens Shutter
- Carrying case included
- Quick Start-up 5 sec / Instant Off
- 5000 hour \*E-TORL long-life lamp
- 60 inch projection at 1.8m
- Low standby power consumption (0.4W in Standby)


\*E-TORL Epson-Twin Optimize Reflection Lamp



# Multimedia Projector EB-S8/EB-X8/EB-W8

## Digital Connectivity (only for EB-X8/W8)

The built-in HDMI terminal provides an interface for transmitting high quality images and music through an HDMI connection. Moreover, the USB Display function makes it possible to connect to a PC via a USB cable instead of an RGB cable. It is also possible to view a J-peg slide show file without a PC by simply inserting a USB memory device.

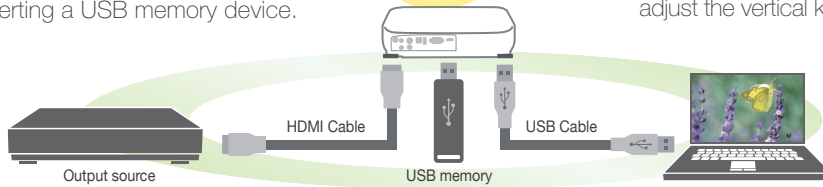

## Frontal Exhaust

The exhaust is positioned in the front, so people sitting beside the projector are not bothered.



## Auto Keystone Correction (only for X8/W8)

This function automatically detects the projector's vertical angle and adjust the vertical keystone distortion instantly.

SPECIFICATIONS		EB-S8	EB-X8	EB-W8	
Specification of Main Parts	LCD	Size	0.55 inch (x 3)	0.55 inch (x 3)	
		Pixel Number	480,000 dots (800 x 600) x 3	786,432 dots (1024 x 768) x 3	1,024,000 dots (1280 x 800) x 3
		Native Resolution	SVGA	XGA	WXGA
	Projection Lens	Manual focus & 1.35x digital zoom F=1.44 / F=16.6mm		Manual focus & 1.2x optical zoom F=1.58 - 1.72 / F=16.9 - 20.28mm	
Lamp	Type	200W UHE			
	Life	4000 hours (High Brightness mode) / 5000 hours (Eco Brightness mode)			
Screen Size	30 to 350 inch [0.87 to 10.5m]		30 to 300 inch [0.9 to 9.0m]	33 to 318 inch [0.9 to 9.0m]	
Offset	8:1		6:1		
Light Output*	Brightness Control Normal / Eco		2500 lm / 1960 lm		
Color Light Output*	2500 lm / 1960 lm				
Contrast*	2000:1				
Sound Output	1W monaural				
Auto Keystone Correction	N/A		Yes		
Analog RGB	Input Terminal	Video	D-sub 15-pin x 1		
		Audio	Stereo Mini x 1	RCA x 1 (White / Red)	
Video	Output Terminal	Audio	Stereo Mini x 1	N/A	
		Video	Composite Video: RCA (Yellow) x 1 S-Video: Mini DIN x 1 Component Video: D-sub 15-pin x 1 (in common with Analog RGB connector) RGB Video: D-sub 15-pin x 1 (in common with Analog RGB connector)		
Digital Input Terminal	Video & Audio	Video	Stereo Mini x 1 (in common with Analog RGB Audio terminal)		
		Audio	RCA x 1 (White/Red) (in common with Analog RGB Audio terminal)		
Control	Terminal	USB Type B x 1			
Memory	Terminal	N/A		USB Type A x 1	
Operating Temperature	5°C to 35°C <41°F to 95°F>				
Operating Altitude	Up to 7,500 feet <2,286m> (over 4,921 feet <1,500m> area: with High Altitude mode)				
Start-Up Period	About 5 sec.				
Direct Power On	Yes				
Cool-Down Period	Instant off				
Power Supply Voltage	100 - 240V AC +/- 10%, 50/60Hz				
Power Consumption	100-120V	Lamp on	280W		
		Stand by	0.3W (Communication Off)		
	220-240V	Lamp on	265W		
		Stand by	0.4W (Communication Off)		
Dimensions Exclude Feet (D x W x H)	228 x 295 x 77				
Weight	Approx. 5.1 lbs. / 2.3kg				
Fan Noise	Brightness Control : Normal / Eco		37dB / 29dB		

\*Light Output / Color Light Output / Contrast --- Color mode: Dynamic, Zoom: Wide

## SUPPLIED ACCESSORIES

- Power Cable 1.8m
- Remote Control
- With AA type alkaline batteries x 2pcs
- Computer Cable
- 1.8m <6 ft>, AHD-15 pin type slim-cable
- Soft Carrying Case
- Password Protect Sticker
- Owner's Manual

## OPTIONAL ACCESSORIES

- ELPLP54 Spare Lamp
- ELPAF25 Air Filter Set

## WARRANTY SERVICE

2 Years Onsite Warranty Service to be provided for local purchase only.



# The warranty service can be extended by purchasing Epson Coverplus Extended Warranty. For more information, please contact Epson customer support.

## Bold, Bright, Beautiful... 3LCD Technology




3LCD technology achieves bright, natural images and smooth, sharp video playback. No color break-up makes images gentle on the eyes.



Optical unit with high light-use efficiency

## CONNECTOR PANEL (EB-S8)



## CONNECTOR PANEL (EB-X8 / W8)



## CONNECTOR PANEL

- Audio Out
- Audio Input
- S-Video Input
- Video Input
- USB (Type B)
- Computer Input
- Video -L Input
- Video -R Input
- USB (Type A)
- HDMI

## PROJECTION DISTANCE (EB-S8)

4:3 Screen size		Shortest (Wide)	Longest (Tele)	Offset (Wide)	Offset (Tele)
X (screen size / dimension)	Y (cm / inch)	Z (cm / inch)	Z (cm / inch)	Z (cm / inch)	Z (cm / inch)
60" / 120cm x 91cm 47.2" x 35.4"	177 / 70	240 / 95	10 / 3.9	3 / 1	
80" / 160cm x 120cm 63.0" x 47.2"	237 / 93	321 / 126	13 / 5.2	3 / 1.3	
100" / 200cm x 150cm 78.7" x 59.1"	297 / 117	402 / 158	17 / 6.5	4 / 1.7	
200" / 410cm x 300cm 161.4" x 118.1"	597 / 235	807 / 318	33 / 13.1	9 / 3.4	

## PROJECTION DISTANCE (EB-X8)

4:3 Screen size		Shortest (Wide)	Longest (Tele)	Offset
X (screen size / dimension)	Y (cm / inch)	Z (cm / inch)	Z (cm / inch)	Z (cm / inch)
60" / 120cm x 91cm 47.2" x 35.4"	180 / 71	217 / 85	10 / 4	
80" / 160cm x 120cm 63.0" x 47.2"	241 / 95	290 / 114	14 / 5.3	
100" / 200cm x 150cm 78.8" x 59.1"	302 / 119	363 / 143	17 / 6.7	
200" / 410cm x 300cm 161.4" x 118.1"	607 / 239	729 / 287	34 / 13.3	

## PROJECTION DISTANCE (EB-W8)

16:10 Screen size		Shortest (Wide)	Longest (Tele)	Offset
X (screen size / dimension)	Y (cm / inch)	Z (cm / inch)	Z (cm / inch)	Z (cm / inch)
60" / 130cm x 81cm 51.0" x 32.0"	168 / 66	202 / 79	12 / 4.5	
80" / 170cm x 110cm 67.0" x 43.0"	225 / 88	270 / 106	15 / 6.1	
100" / 220cm x 130cm 87.0" x 51.0"	281 / 111	338 / 133	19 / 7.6	
200" / 430cm x 270cm 169.0" x 106.0"	566 / 223	680 / 268	38 / 15.1	