



Smart concept; Smart design

Friendly, Elegant & Compact



Light Output
2500 lm

Frontal Exhaust

Digital Connectivity
(only for EB-X8/W8)

Auto Keystone
(only for EB-X8/W8)

W8/X8/S8 offers not just a stylish new design, but great performance as well. Its 2500 lumens allows for use in bright light conditions. Several digital connection possibilities broaden its compatibility with computers, games and DVD players.

- AV Mute Slide Lens Shutter
- Carrying case included
- Quick Start-up 5 sec / Instant Off
- 5000 hour *E-TORL long-life lamp
- 60 inch projection at 1.8m
- Low standby power consumption (0.4W in Standby)


*E-TORL Epson-Twin Optimize Reflection Lamp



Multimedia Projector EB-S8/EB-X8/EB-W8

Digital Connectivity (only for EB-X8/W8)

The built-in HDMI terminal provides an interface for transmitting high quality images and music through an HDMI connection. Moreover, the USB Display function makes it possible to connect to a PC via a USB cable instead of an RGB cable. It is also possible to view a J-peg slide show file without a PC by simply inserting a USB memory device.

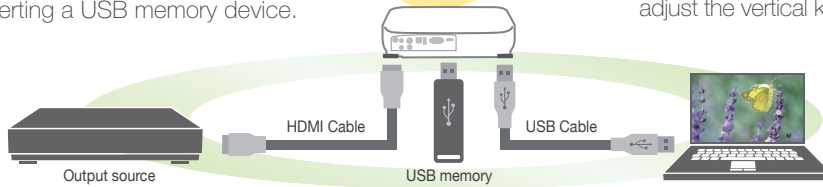

Frontal Exhaust

The exhaust is positioned in the front, so people sitting beside the projector are not bothered.



Auto Keystone Correction (only for X8/W8)

This function automatically detects the projector's vertical angle and adjust the vertical keystone distortion instantly.

| SPECIFICATIONS | | EB-S8 | EB-X8 | EB-W8 | |
|-------------------------------------|-----------------------------------|--|--|--|---------------------------------|
| Specification of Main Parts | LCD | Size | 0.55 inch (x 3) | 0.55 inch (x 3) | 0.59 inch (x 3) |
| | | Pixel Number | 480,000 dots (800 x 600) x 3 | 786,432 dots (1024 x 768) x 3 | 1,024,000 dots (1280 x 800) x 3 |
| | | Native Resolution | SVGA | XGA | WXGA |
| | Projection Lens | Manual focus & 1.35x digital zoom F=1.44 / F=16.6mm | | Manual focus & 1.2x optical zoom F=1.58 - 1.72 / F=16.9 - 20.28mm | |
| Lamp | Type | 200W UHE | | | |
| | Life | 4000 hours (High Brightness mode) / 5000 hours (Eco Brightness mode) | | | |
| Screen Size | 30 to 350 inch [0.87 to 10.5m] | | 30 to 300 inch [0.9 to 9.0m] | 33 to 318 inch [0.9 to 9.0m] | |
| Offset | 8:1 | | 6:1 | | |
| Light Output* | Brightness Control Normal / Eco | 2500 lm / 1960 lm | | 2500 lm / 1960 lm | |
| Color Light Output* | | 2500 lm / 1960 lm | | 2500 lm / 1960 lm | |
| Contrast* | | 2000:1 | | | |
| Sound Output | | 1W monaural | | | |
| Auto Keystone Correction | | N/A | Yes | | |
| Analog RGB | Input Terminal | Video | D-sub 15-pin x 1 | | |
| | Audio | | Stereo Mini x 1 | RCA x 1 (White / Red) | |
| Video | Input Terminal | Video | Composite Video: RCA (Yellow) x 1 S-Video: Mini DIN x 1 Component Video: D-sub 15-pin x 1 (in common with Analog RGB connector) RGB Video: D-sub 15-pin x 1 (in common with Analog RGB connector) | | |
| | | Audio | Stereo Mini x 1 (in common with Analog RGB Audio terminal) | RCA x 1 (White/Red) (in common with Analog RGB Audio terminal) | |
| Digital Input Terminal | Video & Audio | N/A | HDMI x 1 | | |
| Control | Terminal | USB Type B x 1 | | | |
| Memory | Terminal | N/A | USB Type A x 1 | | |
| Operating Temperature | | 5°C to 35°C <41°F to 95°F> | | | |
| Operating Altitude | | Up to 7,500 feet <2,286m> (over 4,921 feet <1,500m> area: with High Altitude mode) | | | |
| Start-Up Period | | About 5 sec. | | | |
| Direct Power On | | Yes | | | |
| Cool-Down Period | | Instant off | | | |
| Power Supply Voltage | | 100 - 240V AC +/- 10%, 50/60Hz | | | |
| Power Consumption | 100-120V | Lamp on | 280W | | |
| | | Stand by | 0.3W (Communication Off) | | |
| | 220-240V | Lamp on | 265W | | |
| | | Stand by | 0.4W (Communication Off) | | |
| Dimensions Exclude Feet (D x W x H) | | 228 x 295 x 77 | | | |
| Weight | | Approx. 5.1 lbs. / 2.3kg | | | |
| Fan Noise | Brightness Control : Normal / Eco | 37dB / 29dB | | | |

*Light Output / Color Light Output / Contrast --- Color mode: Dynamic, Zoom: Wide

SUPPLIED ACCESSORIES

| |
|---|
| Power Cable 1.8m |
| Remote Control |
| With AA type alkaline batteries x 2pcs |
| Computer Cable |
| 1.8m <6 ft>, AHD-15 pin type slim-cable |
| Soft Carrying Case |
| Password Protect Sticker |
| Owner's Manual |

OPTIONAL ACCESSORIES

| | |
|---------|----------------|
| ELPLP54 | Spare Lamp |
| ELPAF25 | Air Filter Set |

WARRANTY SERVICE

2 Years Onsite Warranty Service to be provided for local purchase only.



The warranty service can be extended by purchasing Epson Coverplus Extended Warranty. For more information, please contact Epson customer support.

Bold, Bright, Beautiful... 3LCD Technology



3LCD technology achieves bright, natural images and smooth, sharp video playback. No color break-up makes images gentle on the eyes.




Optical unit with high light-use efficiency

CONNECTOR PANEL

| | |
|----|----------------|
| 1 | Audio Out |
| 2 | Audio Input |
| 3 | S-Video Input |
| 4 | Video Input |
| 5 | USB (Type B) |
| 6 | Computer Input |
| 7 | Video -L Input |
| 8 | Video -R Input |
| 9 | USB (Type A) |
| 10 | HDMI |

CONNECTOR PANEL (EB-S8)



CONNECTOR PANEL (EB-X8 / W8)



PROJECTION DISTANCE (EB-S8)

| 4:3 Screen size | Shortest (Wide) | Longest (Tele) | Offset (Wide) | Offset (Tele) |
|---|-----------------|----------------|---------------|---------------|
| X (screen size / dimension) | Y (cm / inch) | | Z (cm / inch) | Z (cm / inch) |
| 60" / 120cm x 91cm 47.2" x 35.4" | 177 / 70 | 240 / 95 | 10 / 3.9 | 3 / 1 |
| 80" / 160cm x 120cm 63.0" x 47.2" | 237 / 93 | 321 / 126 | 13 / 5.2 | 3 / 1.3 |
| 100" / 200cm x 150cm 78.7" x 59.1" | 297 / 117 | 402 / 158 | 17 / 6.5 | 4 / 1.7 |
| 200" / 410cm x 300cm 161.4" x 118.1" | 597 / 235 | 807 / 318 | 33 / 13.1 | 9 / 3.4 |

PROJECTION DISTANCE (EB-X8)

| 4:3 Screen size | Shortest (Wide) | Longest (Tele) | Offset |
|---|-----------------|----------------|---------------|
| X (screen size / dimension) | Y (cm / inch) | | Z (cm / inch) |
| 60" / 120cm x 91cm 47.2" x 35.4" | 180 / 71 | 217 / 85 | 10 / 4 |
| 80" / 160cm x 120cm 63.0" x 47.2" | 241 / 95 | 290 / 114 | 14 / 5.3 |
| 100" / 200cm x 150cm 78.6" x 59.1" | 302 / 119 | 363 / 143 | 17 / 6.7 |
| 200" / 410cm x 300cm 161.4" x 118.1" | 607 / 239 | 729 / 287 | 34 / 13.3 |

PROJECTION DISTANCE (EB-W8)

| 16:10 Screen size | Shortest (Wide) | Longest (Tele) | Offset |
|---|-----------------|----------------|---------------|
| X (screen size / dimension) | Y (cm / inch) | | Z (cm / inch) |
| 60" / 130cm x 81cm 51.0" x 32.0" | 168 / 66 | 202 / 79 | 12 / 4.5 |
| 80" / 170cm x 110cm 67.0" x 43.0" | 225 / 88 | 270 / 106 | 15 / 6.1 |
| 100" / 220cm x 130cm 87.0" x 51.0" | 281 / 111 | 338 / 133 | 19 / 7.6 |
| 200" / 430cm x 270cm 169.0" x 106.0" | 566 / 223 | 680 / 268 | 38 / 15.1 |



Epson Hong Kong Limited
20/F, Harbour Centre,
25 Harbour Road, Wanchai, Hong Kong

Epson Customer Service Centre
Unit 517, Trade Square, 681 Cheung Sha Wan Road,
Cheung Sha Wan, Kowloon, Hong Kong
20/F, Harbour Centre,
25 Harbour Road, Wanchai, Hong Kong

Enquiry hotline : (852) 2827 8711
Technical hotline : (852) 2827 8911

URL: www.epson.com.hk

AUG09-17-PROJECTOR