

# BenQ

## MP525P Digital Projector



- Filter-Free
- 2,500 ANSI Lumens
- Contrast 2600:1
- XGA
- 2W Speaker
- 28 dB




**BenQ**  
Enjoyment Matters.

# BenQ Digital Projector MP525P

- Filter Free Design
- No Color Decay
- 2500 ANSI Lumens
- XGA Native Resolution
- BrilliantColor™
- 3D Color Management
- 6 Segments Color Wheel
- Keystone ±40°
- 2W Speaker
- Closed Captioning
- Panel Key Lock
- Quick Cooling
- Quick Auto Search
- Standby Power < 1W
- Security Password
- High Altitude Mode
- HDTV Compatible
- Auto Adjustment Hot Key

## Specifications

Projection System	DLP® technology by Texas Instruments®		
Native Resolution	XGA (1024 x 768)		
Brightness	2500 ANSI lumens		
Contrast Ratio	2600:1 (Full on/Full off)		
Keystone	Manual Vertical ±40°		
Aspect Ratio	4:3 Native, 16:9 Selectable		
Color	Full 16.7 million color palette		
Lens	F=2.55 to 2.65, f=20.95 ~ 23.0 mm		
Zoom Ratio	Manual Zoom, 1.10:1		
Image Size (Diagonal)	24" to 300"		
Throw Ratio	1.86 - 2.04 (53"@2M)		
Lamp	210W, 3000/4000 hours (Normal/Economic mode)		
Computer Compatibility	VGA(640 x 480) to UXGA(1600 x 1200)		
HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p		
Video Compatibility	NTSC, PAL, SECAM		
Horizontal Frequency	31-82 kHz		
Vertical Scan Rate	48-85 Hz		
Input Terminals	PC	Analog RGB: D-sub 15 pin x 1	
	A/V	Component Video: D-sub 15 pin x 1 (Shared with Analog RGB connector)	
		S-Video: Mini Din 4 pin x 1	
		Composite Video: RCA x 1	
		Audio	Stereo Mini Jack x 1
Output Terminals	PC	Monitor Out: D-sub 15 pin x 1	
	Audio	Variable Audio Out : Stereo Mini Jack x 1 Speaker: 2W x 1	
Control Terminal	Serial Connector : RS232 9 pin x 1		
Dimensions(W x H x D)	10 x 3.5 x 8.4 inch (255 x 90 x 214 mm)		
Weight	4.8 lbs (2.2 kg)		
Power Supply	100 to 240 VAC, 50/60 Hz		
Power Consumption	275W, Standby < 1W		
Audible Noise	33/28 dB (Normal/Economic mode)		
On-Screen Display Languages	Bulgarian / Croatian / Czech / Danish / Dutch / English / Finnish		
	French / German / Hungarian / Italian / Japanese / Korean / Norwegian		
	Polish / Portuguese / Romanian / Russian / Simplified Chinese / Spanish		
	Swedish / Turkish / Thai / Traditional Chinese (24 Languages)		
	Picture Modes	Dynamic Mode	Presentation Mode
		sRGB Mode	Cinema Mode
User 1 Mode		User 2 Mode	
Functions	BrilliantColor™	Quick Auto Search	
	Closed Captioning	Wall Color Correction	
	3D Color Management	Blank	
	Resolution Reminder	Panel Key Lock	
	Digital Zoom (x2)	Auto Off	
	Freeze	Security Password	
	HDTV compatible	"Q?" Hot Key for FAQ	
	High altitude mode	Auto Adjustment Hot Key	
	Accessories (Standard)	Quick Start Guide	VGA Cable
		Manual CD	Power Cord
Remote Control w/battery			
Accessories (Optional)	Presentation Plus	Spare Lamp Kit	
	RS232 Cable	Soft Carry Case	

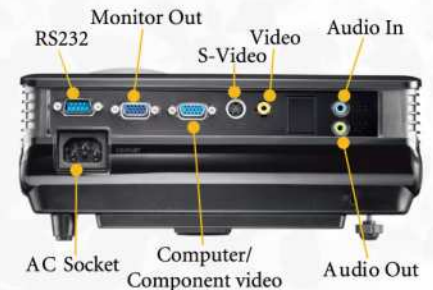

## Accessories (Optional)



Presentation Plus

Spare Lamp Kit



Ceiling Mount

## Projection size

Screen size(inches)	40	60	80	100	120	150	200	300
Distance with max zoom(Min length)(mm)	1509	2264	3019	3774	4528	5660	7547	11321
Distance with min zoom(Max length)(mm)	1660	2491	3321	4151	4981	6226	8302	12453

There is 3% tolerance these numbers due to optical component verification.



# ProSelecta

View :: Compare :: Select - [www.ProSelecta.com](http://www.ProSelecta.com)