

CP-X445

High brightness in a compact format. Hitachi's new 3-LCD Projector offers 3200 ANSI Lumens, full video and computer connectivity as well as network function.

- 3200 ANSI Lumens
- Full Connectivity including DVI and Component Inputs
- Computer Output (D-sub 15-pin)
- Network Connection
- Distance Projection Ratio 1.5-1.8:1
- 1.2 x Zoom Lens
- Horizontal and Vertical Digital Keystone Correction
- 33dB in Whisper Mode
- 15 Language Menu
- 4 Built-in Speakers
- Full Function Remote Control



Multi Function Controls



CP-X445

Technical Specifications

HITACHI

Inspire the Next

OPTICAL

LCD Panel	0.79" P-Si TFT_3 with Micro Lens
Resolution	1024 dots_768 lines
Number of Color	8bit/color, 16.7Mcolors
Brightness	Normal Mode: 3200 ANSI lumens Whisper Mode: 2600 ANSI lumens
Contrast Ratio	400:1
Lamp	UHB230W
Lens / Projection Distance	F=1.7 ~ 2.1, f=24.3 ~ 29.3mm, Zoom: x 1.2/1.8m@60"
Distance to Width ratio (:1)	1.50 (WIDE), 1.80 (TELE)
Keystone	9:1 upward shift, fixed
Display Size	30 x 300 inches
Frequency Range	Horizontal: 15 ~ 91 kHz (Video/PC) Vertical: 50 ~ 120Hz (Video/PC)

COMPATIBILITY

Computer Compatibility	IBM Compatible VGA, SVGA, XGA, SXGA (Smart resizing), UXGA Capability, MAC 16" (Pixel works Chip)
Video Compatibility	NTSC/PAL(-BGDHI)/SECAM/PAL-M,N/NTSC4.43/PAL60 SDTV:525i(480i),525p(480p),625i(576i) HDTV:750p(720p@60Hz),1125i(1080i@50/60Hz)"

FEATURES

Network function (for control Projector), Plug & Play (DDC2B)
Variable Color (R, G, B individual)
MENU : 15 Language, Freeze function, Magnifying, Digital gamma correction, 3D Y/C separation, 2-3 pull down, Auto Vertical Keystone correction, Electrical H&V Keystone correction, Auto configuration (H-Phase, H-Size, Position), My Screen, PIN lock system
3.0 W x 4

Audio Speakers

CONNECTORS

Computer Input	15-pin Mini D-sub x 2 DVI Input x 1
Computer Output	15-pin Mini D-sub x 1
Video Input	RCA Jack x 1 S-Video jack x 1 RCA Jack (x3) x 1 for Component
Audio Input	RCA Jack (x2) x 1 for Video Stereo-mini Jack x 2 for Computer
Audio Output	Stereo-mini Jack x 1
Control	9-pin D-sub x 1 for RS232 RJ45 (10 BASE-T)
Mouse	USB x 1
Wired remote Control	3.5 dia. Stereo-mini jack x 1

PHYSICAL

Weight	3.9 Kg
Size (W x D x H)	336 x 265 x 95mm excluding feet and extrusions
Miscellaneous	Power, Lamp and Temp indicator light, Ceiling Mount image, Rear Projection Image"

SUPPLIED WITH

Remote Control, Batteries, RGB cable, Safety Instruction, Quick Guide, Power cord, User Manual (English, German, French, Italian, Spanish, Dutch, Norwegian, Portuguese)"

GENERAL


Voltage	100-120V/220-240V, auto switching
Noise	Normal Mode: 38dB Whisper Mode: 33dB

CERTIFICATION

UL60950/C-UL, FCC Part 15, Class B, CE, TUV EN60950


OPTIONAL ACCESSORIES

Replacement Lamp	DT00691
------------------	---------

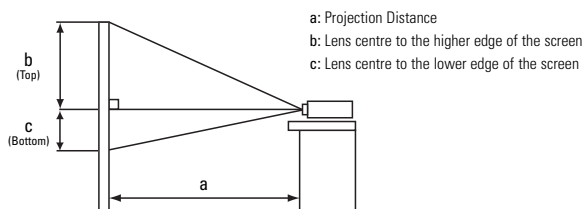

Screen Size	a (min)	a (max)	b (top)	c (bottom)
30	0.9m (35")	1.1m (42")	41cm (16")	5cm (2")
40	1.2m (47")	1.4m (57")	55cm (22")	6cm (2")
50	1.5m (59")	1.8m (71")	69cm (27")	8cm (3")
60	1.8m (71")	2.2m (86")	82cm (32")	9cm (4")
70	2.1m (83")	2.6m (100")	96cm (38")	11cm (4")
80	2.4m (96")	2.9m (115")	110cm (43")	12cm (5")
90	2.7m (108")	3.3m (130")	123cm (49")	14cm (5")
100	3.0m (120")	3.7m (144")	137cm (54")	15cm (6")
120	3.7m (144")	4.4m (174")	165cm (65")	18cm (7")
150	4.6m (181")	5.5m (217")	206cm (81")	23cm (9")
200	6.1m (241")	7.4m (291")	274cm (108")	30cm (12")
250	7.7m (302")	9.2m (364")	343cm (135")	38cm (15")
300	9.2m (363")	11.1m (437")	411cm (162")	46cm (18")

All brand or product names are trademarks or registered trademarks of their respective owners. Design and specifications are subject to change without notice.

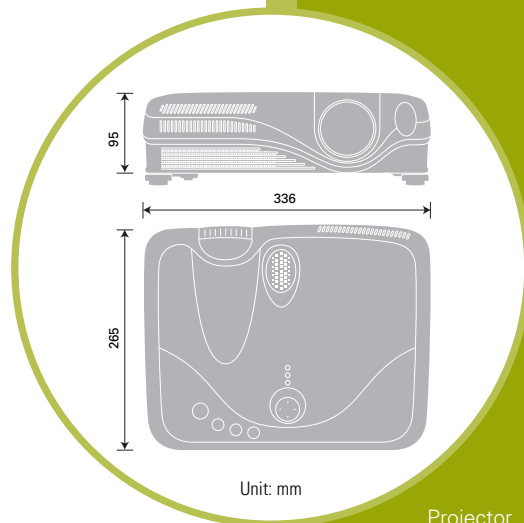

Projector Dimensions

HITACHI DIGITAL MEDIA
Hitachi Europe Ltd
Whitebrook Park
Lower Cookham Road
Maidenhead
Berkshire SL6 8YA
Tel: 01628 585 000
Fax: 01628 585 500
www.hitachidigitalmedia.com

The specification above and photography is for reference only and may be subject to change.