
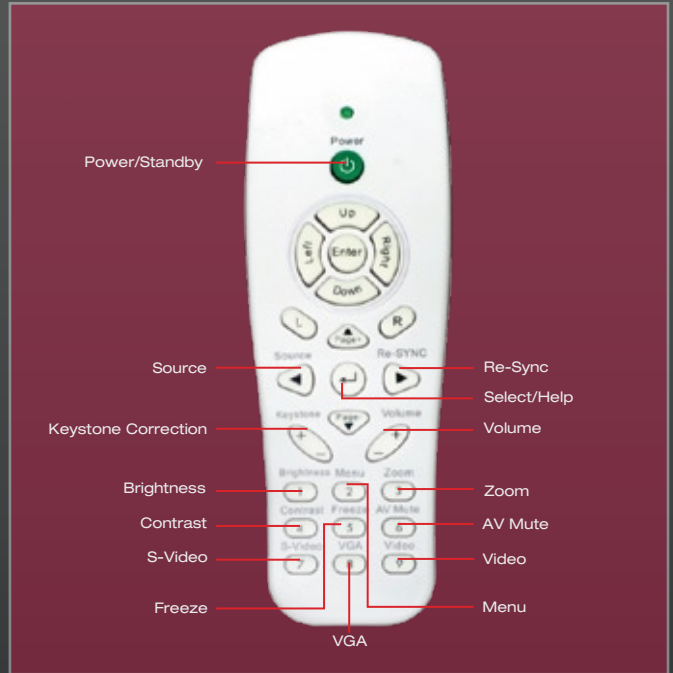


Big Screen Gaming - Be Part of the Action

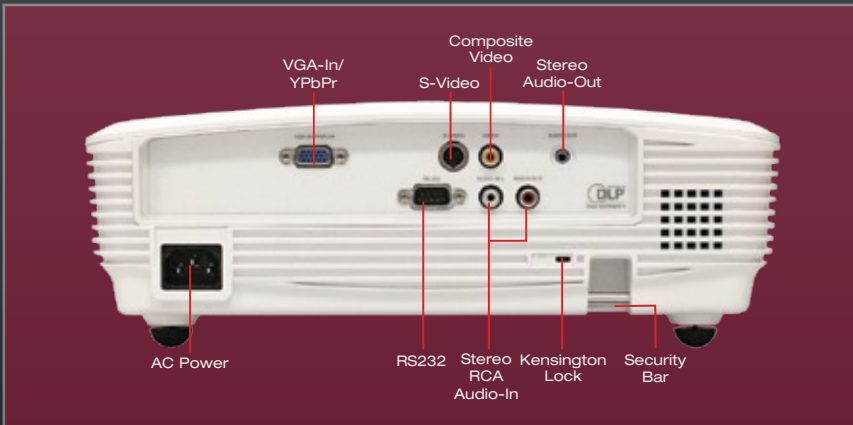

Elevate your gaming experience with Optoma's GT360. Designed from the ground up for gaming enthusiasts, the GT360's maximum screen size goes up to 300" for an impressive big screen display of games, movies, television or computer content. The portable GT360 comes with its own backpack to bring your gaming fun wherever you go.

3D content can be viewed with DLP®Link™ 3D Glasses when the projector is connected to a computer with a compatible 3D graphics card. Please visit www.optoma.com for more information.

GT360 FEATURES

- ❑ Bright at 2500 ANSI lumens with a high contrast ratio of 3000:1
- ❑ Projects 150" diagonal image at about nine feet
- ❑ Supports resolutions up to 1080p
- ❑ Powerful audio - built-in 10-watt speaker system
- ❑ Flexible connections - VGA, S-video, Composite, Stereo RCA Audio-in, Stereo Audio-out & RS-232

GT360 | Multimedia Projector


GameTime Nylon Backpack Included



Projection Distance/Image Size

Projection Distance (Feet)	Diagonal (Inches)
6	100
7	117
8	133
9	150
10	167
11	183
12	200

Control Panel

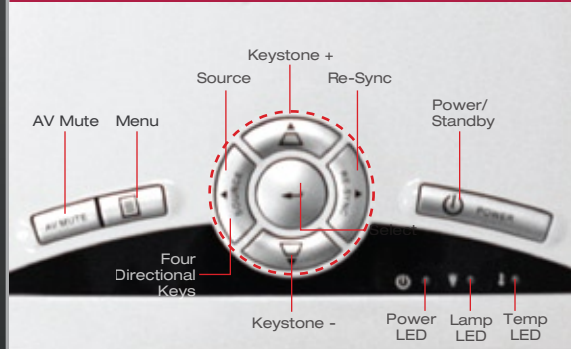

Optional Accessories

Lamp:	BL-FP180E
Remote Control:	BR-3050N
Backpack:	BK-4029
Power Cord (1m):	BC-PUPIX01
Power Cord (11m):	BC-PUPIX11
Composite Cable (1.8m):	BC-COC0X02
VGA Cable (1.8m):	BC-VGVGXX02
VGA Cable (5m):	BC-VGVGXX05
Component to VGA Aapter Cable:	BC-CRVGYX00
Ceiling Mount:	BM-5001U
100' Matte White 4:3 Manual Pull-Down Screen:	DS-3100PMG+

Specifications

Display Technology:	Single 0.55" DC3 DMD DLP® Technology by Texas Instruments
Resolution:	Native SVGA (800 x 600)
Maximum Resolution:	UXGA (1600 x 1200), 1080p
Brightness (Typical):	2500 ANSI Lumens
Contrast Ratio:	3000:1 (Full On/Full Off)
Lamp Type:	180W P-VIP
Lamp Life (STD/Bright):	Estimated at 5000/3000 Hours
Throw Ratio:	0.9:1 (Distance/Width)
Image Size (Diagonal):	27" to 300" (0.68 to 7.62 m)
Projection Distance:	1.64' to 18.0' (0.5 to 5.5 m)
Noise Level (STD/Bright):	28dB/30dB
Remote Control:	IR Remote Control
Computer Compatibility:	UXGA, SXGA+, SXGA, XGA, SVGA, VGA Resized, VESA, PC and Macintosh Compatible
Video Compatibility:	NTSC, PAL, SECAM, SDTV (480i), EDTV (480p), HDTV (576i/p, 720p, 1080i/p)
3D Compatibility:	120Hz frame sequential 3D for resolutions up to 720p, 60Hz field sequential 3D for resolutions up to 480i
Aspect Ratio:	4:3 Native, 16:9 Compatible
Projection Lens:	F=2.55, f=10.19 mm
Offset:	115%
User Controls:	Complete On-Screen Menu Adjustments in 20 Languages
Audio:	Two 5-Watt Stereo Speakers
Keystone Correction:	± 15° Vertical
Vertical Refresh Rate:	24 to 120 Hz
Horizontal Scan Rate:	15 to 91 KHz
Power Supply:	AC Input 100-240V, 50-60 Hz, Auto-Switching
Power Consumption:	255 Watts Max (Bright), 233 Watts (STD) <1 Watt (Standby)
Weight:	6.5 lbs (2.95 kg)
Dimensions (W x H x D):	12.76" x 3.82" x 9.21" (324 x 97 x 234 mm)
Operating Temperature:	41° to 104°F (5° to 40°C), 80% Max Humidity, Adjustable Fan Speed for High Altitude Application
Displayable Colors:	1.07 Billion
Projection Method:	Front, Rear, Ceiling Mount, Table Top
Uniformity:	85%
Security:	Kensington® Lock, Keypad Lock and Security Bar
I/O Connectors:	VGA-In, S-Video, Composite Video, Stereo RCA Audio-In, Stereo Audio-Out, and RS-232
Standard Accessories:	AC Power Cord, VGA to Component Adapter, Remote Control, Batteries for Remote, Lens Cap, Backpack, Multilingual CD-ROM User's Manual, Quick Start Card and Warranty Card
Optional Accessories:	Carrying Case, Ceiling Mount, VGA Cable, VGA to Component Cable, and Panoview™ Series Screens
Warranty:	1 Year Limited Parts and Labor, 90 Days on Lamp
UPC:	796435 81 115 0

www.optoma.com

