



Smart concept; Smart design

Bright, Elegant & Compact



Light Output **2600 lm**

Front Exhaust

Digital Connectivity
(only for EB-X10/W10)

Auto Keystone
(only for EB-X10/W10)

The Epson EB-S10/X10/W10 projectors offer a stylish new design, and impressive performance. A powerful 2600 lumens enables use in bright environments, and their wide variety of input options ensures compatibility with a broad range of multimedia input devices including computers, DVD players and gaming consoles

- AV Mute Slide Lens Shutter
- Professional Carry Case
- Quick Start-up 5 sec / Instant Off
- 5000 hour *E-TORL long-life lamp
- 60 inch projection at 1.8m
- Low standby power consumption


*E-TORL Epson-Twin Optimize Reflection Lamp



Multimedia Projector EB-S10/EB-X10/EB-W10

Digital Connectivity

Projecting the highest quality digital images is made possible thanks to the inclusion of an HDMI terminal on both the Epson EB-X10 and W10. And connection to a PC or Mac via USB cable is simple with Epson's USB display feature. You can even view a J-PEG slide show directly from a USB memory device without the need for a PC.

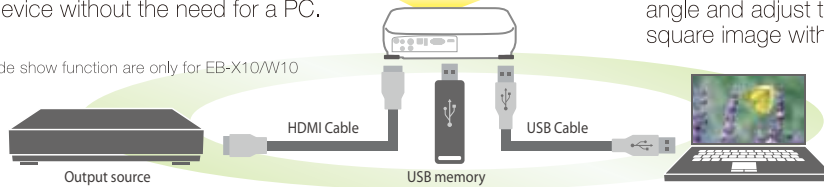

*HDMI and Slide show function are only for EB-X10/W10

Front Exhaust

Positioning the projector exhaust in the front of the projector means no irritating hot air flow affecting the audience during desktop usage.



Auto Keystone Correction (only for X10/W10)

The EB-X10 and W10 automatically detect the projector's vertical angle and adjust the vertical keystone distortion ensuring a sharp square image without the need for complicated adjustments.

SUPPLIED ACCESSORIES

Power Cable 1.8m
Remote Control
With AA type alkaline batteries x 2pcs
Computer Cable
1.8m <6 ft>, AHD-15 pin type slim-cable
Soft Carrying Case
Password Protect Sticker
Owner's Manual

OPTIONAL ACCESSORIES


ELPLP58	Spare Lamp
ELPAF25	Air Filter Set

SPECIFICATIONS

Specification of Main Parts		EB-S10	EB-X10	EB-W10
LCD	Size	0.55 inch (x 3)	0.55 inch (x 3)	0.59 inch (x 3)
	Pixel Number	480,000 dots (800 x 600) x 3	786,432 dots (1024 x 768) x 3	1,024,000 dots (1280 x 800) x 3
	Native Resolution	SVGA	XGA	WXGA
Projection Lens		Manual focus & 1.35x digital zoom	Manual focus & 1.2x optical zoom	
		F=1.44 / F=16.6mm	F=1.58 - 1.72 / F=16.9 - 20.28mm	
Lamp	Type	200W UHE		
	Life	4000 hours (Power consumption: Normal) / 5000 hours (Power consumption: Eco)		
Screen Size		30 to 350 inch [0.87 to 10.5m]	30 to 300 inch [0.9 to 9.0m]	33 to 318 inch [0.9 to 9.0m]
Offset		8:1		6:1
Light Output*		Brightness Control Normal / Eco		
		2600 lm / 2040 lm		
Color Light Output*		2600 lm / 2040 lm		
Contrast*		2000:1		
Sound Output		1W monaural		
Auto Keystone Correction		N/A	Yes	
Analog RGB	Input Terminal	Video	D-sub 15-pin x 1	
	Output Terminal	Audio	Stereo Mini x 1	RCA x 1 (White / Red)
Video	Input Terminal	Video	Composite Video: RCA (Yellow) x 1	
			S-Video: Mini DIN x 1	
			Component Video: D-sub 15-pin x 1 (in common with Analog RGB connector)	
			RGB Video: D-sub 15-pin x 1 (in common with Analog RGB connector)	
	Audio	Stereo Mini x 1 (in common with Analog RGB Audio terminal)	RCA x 1 (White/Red) (in common with Analog RGB Audio terminal)	
Digital Input Terminal		Video & Audio	N/A	HDMI x 1
Control Terminal			USB Type B x 1	
Memory Terminal			N/A	USB Type A x 1
Operating Temperature		5°C to 35°C <41°F to 95°F>		
Operating Altitude		Up to 7,500 feet <2,286m> (over 4,921 feet <1,500m> area: with High Altitude mode)		
Start-Up Period		About 5 sec.		
Direct Power On		Yes		
Cool-Down Period		Instant off		
Power Supply Voltage		100 - 240V AC +/- 10%, 50/60Hz		
Power Consumption	100-120V	Lamp on	280W	
		Stand by	0.3W (Communication Off)	
	220-240V	Lamp on	265W	
		Stand by	0.4W (Communication Off)	
Dimensions Exclude Feet (D x W x H)		228 x 295 x 77		
Weight		Approx. 5.1 lbs. / 2.3kg		
Fan Noise		Brightness Control : Normal / Eco		
		37dB / 29dB		

*Light Output / Color Light Output / Contrast --- Color mode: Dynamic, Zoom: Wide

CONNECTOR PANEL (EB-S10)



CONNECTOR PANEL (EB-X10/W10)



CONNECTOR PANEL

1	Audio Out
2	Audio Input
3	S-Video Input
4	Video Input
5	USB (Type B)
6	Computer Input
7	Video -L Input
8	Video -R Input
9	USB (Type A)
10	HDMI

PROJECTION DISTANCE (EB-S10)

4:3 Screen size		Shortest (Wide)	Longest (Tele)	Offset (Wide)	Offset (Tele)
X (screen size / dimension)	Y (cm / inch)	Z (cm / inch)	Z (cm / inch)	Z (cm / inch)	Z (cm / inch)
60" / 120cm x 91cm 47.2" x 35.4"	177 / 70	240 / 95	10 / 3.9	3 / 1	
80" / 160cm x 120cm 63.0" x 47.2"	237 / 93	321 / 126	13 / 5.2	3 / 1.3	
100" / 200cm x 150cm 78.7" x 59.1"	297 / 117	402 / 158	17 / 6.5	4 / 1.7	
200" / 410cm x 300cm 161.4" x 118.1"	597 / 235	807 / 318	33 / 13.1	9 / 3.4	

PROJECTION DISTANCE (EB-X10)

4:3 Screen size		Shortest (Wide)	Longest (Tele)	Offset
X (screen size / dimension)	Y (cm / inch)	Z (cm / inch)	Z (cm / inch)	Z (cm / inch)
60" / 120cm x 91cm 47.2" x 35.4"	180 / 71	217 / 85	10 / 4	
80" / 160cm x 120cm 63.0" x 47.2"	241 / 95	290 / 114	14 / 5.3	
100" / 200cm x 150cm 78.8" x 59.1"	302 / 119	363 / 143	17 / 6.7	
200" / 410cm x 300cm 161.4" x 118.1"	607 / 239	729 / 287	34 / 13.3	

PROJECTION DISTANCE (EB-W10)

16:10 Screen size		Shortest (Wide)	Longest (Tele)	Offset
X (screen size / dimension)	Y (cm / inch)	Z (cm / inch)	Z (cm / inch)	Z (cm / inch)
60" / 130cm x 81cm 51.0" x 32.0"	168 / 66	202 / 79	12 / 4.5	
80" / 170cm x 110cm 67.0" x 43.0"	225 / 88	270 / 106	15 / 6.1	
100" / 220cm x 130cm 87.0" x 51.0"	281 / 111	338 / 133	19 / 7.6	
200" / 430cm x 270cm 169.0" x 106.0"	566 / 223	680 / 268	38 / 15.1	