


BenQ MX760/761

Digital Projector



HIGHLIGHTS

- Microphone in with two 10W Speakers
- USB Reader
- USB Display (Plug-n-Play)
- LAN Display
- 4-1 Display
- Remote Desktop
- Wireless Display (Optional)
- Filter Free Design
- Virtually No Color Decay
- Crestron RoomView Compatible
- PJ-Link Compatible
- 3700/4200 ANSI Lumens
- XGA Native Resolution
- BrilliantColor™
- 3D Color Management
- VIDI™
- Lens Shift
- Auto Keystone (Vertical)
- Keystone ± 40 Degree
- 6 Segment Color Wheel
- Variable Audio Out
- Closed Captioning

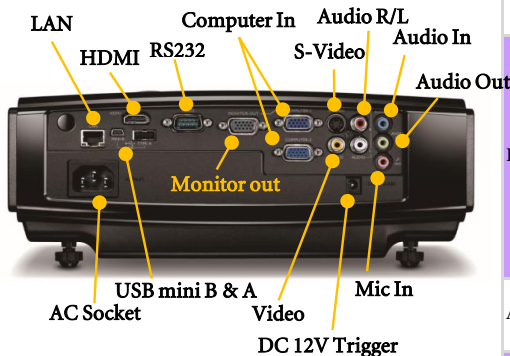

Projection System	DLP® technology by Texas Instruments®	
Native Resolution	XGA (1024 x 768)	
Brightness	3700/4200 ANSI lumens	
Contrast Ratio	5300:1 (Full on/Full off)	
Keystone	Auto Keystone Vertical ± 40 Degree; Manual Vertical ± 40 Degree	
Aspect Ratio	4:3 Native (5 aspect ratio selectable)	
Color	Full 1.07 billion color palette	
Lens	F=2.45~3.07	
Lens Shift	Vertical Lens Shift 20%	
Zoom Ratio	Manual Zoom, 1.6:1	
Image Size (Diagonal)	18" to 300"	
Throw Ratio	1.4 to 2.24 (70"@2M)	
Lamp	300W, 2000/3000 hours (Normal/Economic mode)	
Computer Compatibility	VGA(640 x 480) to UXGA (1600 x 1200)	
HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p	
Video Compatibility	NTSC, PAL, SECAM	
Horizontal Frequency	31-99 kHz	
Vertical Scan Rate	48-120 Hz	
Input Terminals	PC	Analog RGB: D-sub 15 pin x 2 LAN Networking: RJ-45 x 1 (LAN Display) USB Type A x 1 (USB Reader), Type Mini-B x 1 (USB Display) HDMI (v1.3) x 1 S-Video: Mini Din 4 pin x 1 Composite Video: RCA x 1
	A/V	Component Video: D-sub 15 pin x 2 (Shared with Analog RGB) Microphone: Stereo Mini Jack x1 Audio L/R : RCA x 2 Stereo Mini Jack x 1
Output Terminals	PC	Monitor out: D-sub 15 pin x 1
	Audio	Variable Audio Out : Stereo Mini Jack x 1 Speaker: 10W x 2 DC 12V Trigger x1
Control Terminal	Serial Connector : RS232 9 pin x 1	
	RJ45 x 1 (LAN Control)	
	USB Type Mini-B x 1 (Page up/down)	
Dimensions(W x H x D)	11.4 x 5.03 x 9.9 inch (290 x 128 x 252 mm)	
Weight	7.26 lbs (3.3 kg)	
Power Supply	AC 100 to 240 V, 50/60 Hz	
Power Consumption	Typical 419W, Standby < 1W	
Audible Noise	35/30 dB (Normal/Economic mode)	
On-Screen Display Languages	Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hungarian/ Indonesian/ Italian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (26 Languages)	
Picture Modes	PC Input:	A/V Input :
	Dynamic Mode	Dynamic Mode
Functions	Presentation Mode	Presentation Mode
	sRGB Mode	sRGB Mode
	Cinema Mode	Cinema Mode
	User 1 Mode	User 1 Mode
	User 2 Mode	User 2 Mode
	BrilliantColor™	Blank
Accessories (Standard)	VIDI™	Panel Key Lock
	3D Color Management	Auto Off
	Crestron LAN Control	Security Password
	Closed Captioning	HDTV compatible
	Digital Zoom (x2)	High Altitude Mode
	Variable Audio Out	"Q?" Hot Key for FAQ
	Quick Cooling	3D Ready
	Quick Auto Search	Freeze
	PJLink Compatible	Teaching Template
	Quick Start Guide	VGA(D-sub) cable
	Manual CD	Power Cord
	Accessories (Optional)	Remote Control w/battery
Presentation Plus		Spare Lamp Kit
	RS232 Cable	Wireless Dongle