

EX665UTis DLP® Projector

Interactive solution built-in

60" image from just 46cm away

Shadow-free images on projection surfaces

Future proof design – 3D-Ready

Bright images, vivid colours – 3000 ANSI Lumens, Native XGA

Crystal clear images - HDMI connectivity

Interactive Ultra
Short Projection

Plug and play presenting

Cable free presentations with wireless convenience

CR Crestron RoomView® - RJ45 control and monitoring

Secure cable management

Impressive sound quality – integrated 10W speaker

Environmentally friendly design <0.5W standby mode











3D Ultra Short Throw Projection and Interactivity

Engage your audience with the interactivity technology built into the 3D, EX665UTis. Transform a flat wall or tabletop into a 3D interactive surface without the need for a screen or electronic whiteboard.

This complete solution has everything that's needed to create a collaborative learning or working experience, including projector, WizTeach software, interactive pen and wall-mount*.

Ideal for almost any room in educational and corporate environments, the EX665UTis makes the most of the available space without the need for costly screens and interactive whiteboards. The specially designed ultra short throw lens produces huge images from an extremely short distance allowing you to stand closer to the screen, preventing shadows and screen glare.

Captivate your audience, increase their learning potential and help improve results with lessons in crystal clear 2D or incredible 3D.

Using the specially designed wall mount* and clever cable management system the EX665UTis is simple to install. Once in place the many security features ensure the projector is safe and secure.


Designed with you, the presenter, in mind, the EX665UTis with 3000 ANSI Lumens of brightness, incorporates extensive connectivity, plug and play presenting, powerful 10W stereo speakers and Crestron RoomView® control to maintain and monitor the projector over the network. The environmentally friendly EX665UTis has energy saving features including <0.5W standby mode and auto power off saving you both time and money. Our unique Optoma Colour and Imager guarantees ensure hassle-free, long-lasting projection.

*OPTIONAL ACCESSORY



PROJECT & INTERACT

No need for an interactive board

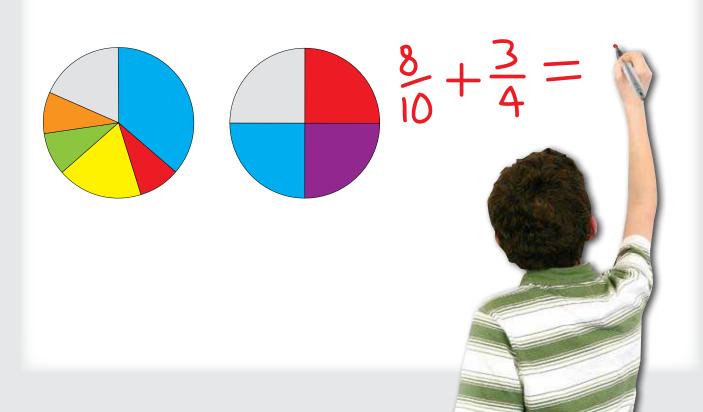

INTERACTIVE ULTRA SHORT THROW BENEFITS

PROBLEMS	SOLUTIONS		
EXPENSIVE	AFFORDABLE		
Electronic interactive whiteboard is needed for interactive teaching.	Interactivity built-in to the projector, can be installed virtually		
	anywhere there is a flat surface.		
LOCATION	ULTRA SHORT THROW (UST)		
Shadows from the presenter or the audience appear on the screen.	Position projector closer to the screen to eliminate shadows and		
Light projecting directly into the eyes of anyone stood close to the	stop light from shining in the presenter's eyes. UST projectors save		
screen surface.	space and enable very large projection displays even in the smallest		
Projector positioned nearly 2m away to achieve a large screen size.	of rooms.		
SECURITY	PEACE OF MIND		
Lack of security features means projectors are vulnerable to	Fully featured UST projectors are fitted with a security bar,		
vandalism and theft.	Kensington™ lock and password protection.		
	Cables are fully protected inside a concealed area within the projector		
	to ensure a neat, tamper proof installation.		
OLD TECHNOLOGY	LATEST TECHNOLOGY		
2D projection fails to deliver the information needed to ensure	Excite and engage your audience with the latest 3D projection.		
it makes a real impact.	Tried and tested 3D technology proven to improve results.		
	3D projection is vital to creating the best classroom or meeting		
	room environment.		

WIZTEACH

Enhance your teaching and learning with the WizTeach interactive software. With over 70 individual learning tools and 3000 ready made images designed to work over your browser or any application and available in 36 languages, the WizTeach software gives you everything you need to interact and engage with your audience.

Diverse uses including presentations for business conferences, teaching in education and training for business.

INTERACTIVE PEN FOR MOUSE CONTROL, DRAWING AND WRITING

Easy to use with all your PC and Mac applications using the intuitive interactive pen.


- Left and right click buttons just like your mouse
- Draw and annotate on the projected image using the Wizteach tools
- Easily advance and reverse your presentation slides






ULTRA SHORT THROW LENS

Position the EX665UTis even closer to the wall so that the light beam doesn't shine into your eyes. Project an impressive 60" diagonal image from just 46cm from the screen. Stand alone or wall mounted the EX665UTis eliminates shadows on the screen and allows you to present with ease.

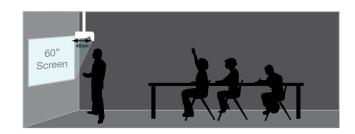

WHY USE AN OPTOMA ULTRA SHORT THROW PROJECTOR?



PERFECT FOR TEACHING

Maximise space in the classroom for teachers and students. The teacher can stand close to the interactive whiteboard without having the intense light from the projector shining directly into their eyes.

FUTURE PROOF TECHNOLOGY FOR THE CLASSROOM

Engage and inspire your students with 3D lessons in Biology, Maths, Geography and many more.



A NEW SOLUTION FOR INTERACTIVITY

Interactive technology offers tremendous potential for improving the learning process. Teachers and presenters can interact with their on screen material, engaging and involving everyone to bring learning to life.



ENERGY EFFICIENT = ENVIRONMENTALLY FRIENDLY = SAVE MONEY

Running costs are reduced thanks to reduced power consumption and standby mode <0.5W. When the projector is no longer required it will automatically turn off, saving energy and prolonging the life of the lamp.

DETAILED PROJECTION

Easy to read text and graphs thanks to the incredibly high native contrast ratios.



SECURE V

Kensington Lock, security bar and password protection help secure your projector and act as a theft deterrent.

Customised start-up screen helps identify who the projector belongs to.

Keypad lock prevents unauthorised adjustments and ensures the projector can only be controlled via the remote control or network.

BRILLIANT COLOURS THAT LAST

Project stunning, vibrant and accurate colour images that won't decay overtime thanks to BrilliantColor™ and DLP® technology.



EASY TO CONTROL AND MONITOR

Crestron RoomView® software provides a custom configurable interface to monitor, manage and control every projector in every room remotely from any computer.



DISCOVER THE ADVANTAGES OF 3D PROJECTION



EDUCATION

Bring the classroom to life. Engage and inspire your students with lessons taught in 3D. Increase your students interest and help them to explore the world, travel through space, see inside the body and bring new ideas to life.



OFFICE

Grab your colleagues or customers attention by delivering a winning presentation. Modelling costs are eliminated as the product can be brought to life in a virtual projected 3D world.



DISPLAY

Wow audiences in museums, galleries and shops to give them a 3D experience they really will remember.



HOW DOES 3D WORK?

Using the inherent speed of DLP® technology, Optoma 3D-Ready projectors can output video and images at an astonishing rate of 120Hz, allowing you to show full screen, full colour, stereoscopic 3D.

The 3D effect is generated by splitting this signal into two standard video streams, one for each eye. Using DLP® Link™ technology, the 3D glasses synchronise with the image on screen to filter each stream to the correct eye. Your brain then combines the two streams to make them jump into life.



WHAT YOU NEED

- 1. Optoma EX665UTis
- 2. Optoma DLP®-Link™ Glasses
- 3. Quad-buffered graphics card (installed in a PC) and 3D educational software

For more information please visit www.optoma.co.uk/3deducation.aspx



CARING FOR THE ENVIRONMENT

The EX665UTis incorporates energy saving features to conserve power and extend the lamp life:



To achieve the maximum 3000hrs lamp life time the projector should be operating in ECO mode and the shut down timer enabled to automatically switch off the projector if it is accidentally left on when no longer required.



Optoma's low energy standby mode significantly reduces power consumption, enabling environmentally friendly power management and lower cost of ownership. It takes less than 10 seconds for the projector to power up and shutdown, saving both time and energy.



We know that improving our products is the best way to reduce our impact on the environment. That's why at Optoma, we design our products to have a long usable life, use fewer materials, ship with the minimum packaging and be free of all possible toxic substances. Naturally, energy efficiency and being recyclable are built in at the design stage. With each new product, we strive towards minimising our environmental impact. For full details of Optoma Project Green please visit our website.

BRIGHT, DETAILED & COLOURFUL PROJECTION

Grab your audience' attention with bright, vivid projected images thanks to the BrilliantColor $^{\text{TM}}$ technology incorporated within the EX665UTis.

Once you've purchased an Optoma DLP® projector, we guarantee that the colours compared to other leading technologies will not fade for a minimum of 5 years.

Preset display modes allow you to achieve a perfect image on a variety of surfaces including screens and interactive whiteboards.







CLEAR, FOCUSED IMAGES

Lessons in the classroom and presentations in the boardroom demand sharp, flawless images. DarkChip3™ technology from Texas Instruments produces a stunning 3000:1 contrast ratio for pin sharp graphics and crystal clear text. Crisper whites, ultra-rich blacks makes images come alive and text easier to read.


To retain image clarity, Optoma projectors are designed with DLP® technology preventing degradation over time to give consistent pixel performance. Our Image Guarantee ensures a precise picture performance and hassle-free projection for a minimum of 5 years.



CRESTRON ROOMVIEW® - NETWORK CONTROL

RoomView® software provides a custom configurable interface to power on/off, monitor, manage and control up to 250 projectors at the same time from any computer.

- Schedule the projectors to power up/down saving time, money and extending the life of the lamp.
- Control and alter the projector settings using a simple web browser page including menu control.
- Send alerts for warning messages.
- Reduce maintenance time by automatically receiving emails for lamp replacements.

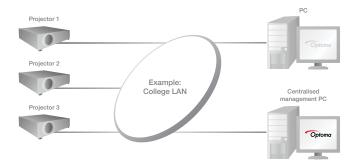



Download Crestron RoomView® Express software from: www.crestron.com/getroomview

RS232 CONTROL

The extensive RS232 command set makes it simple and easy to control the EX665UTis with any control system.

AMX Compatibility - Dynamic Discovery

Protocol is incorporated into the EX665UTis. This feature allows for easy installation with AMX control systems.



HASSLE-FREE PC-LESS PRESENTATION

Enjoy hassle-free presenting with the USB Reader to project a JPEG presentation from a USB flash drive. The Remote Desktop function allows you to present using a wireless mouse and keyboard. You'll get to access everything from your computer remotely on the projection screen!



MULTIPLE DISPLAY OPTIONS FOR VARIOUS OFFICE AND CLASSROOM NEEDS

The EX665UTis gives you plenty of options to project a great presentation or video on your projector.

- USB Display offers the 2-in-1 USB display function using a single cable to manage both the images and mouse controls from your PC device.
- LAN Display offers a cost-effective solution for projection control, monitoring and display.
- Wireless Display keeps cables and wires out of everyone's way with the Mini Wi-Fi Dongle. (optional accessory)

The free downloadable 'Optoma Presenter' software to give you the ability to display information to your projector using a network cable or wireless adaptor. Display presentations and video up to 4-1, 1-8 and partial projection for business presentations, training meetings and educational lessons.







CONNECT WITH EASE

The EX665UTis easily connects to multiple devices such as computers, laptops, DVD players and games consoles.



TRUE HDMI

Project crystal clear images using HDMI v1.3 input. Hassle-free projection from a widescreen computer/HD source with a single HDMI cable – no need for separate audio cables.

EASY LAMP REPLACEMENT


Direct and easy access to the lamp whist the projector is in situ.

AUDIO POWER

Use a microphone and the powerful built-in 10W speakers to capture your audience attention from anywhere within your classroom or meeting room.


Two audio inputs from individual computer and video devices enable the EX665UTis to function as an audio switcher and volume controller. The convenient audio pass thru feature enables idle projection, even in standby mode to power the external speakers, eliminating the need for complicated and costly additional audio hardware and cabling.

[only compatible with stereo mini-jack]

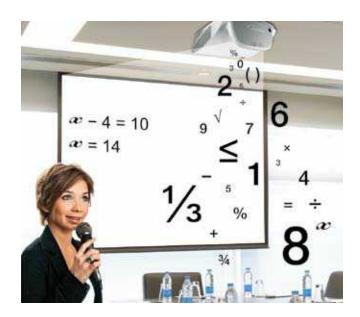

ENLARGE YOUR IMAGES

Use the digital zoom feature to explain the projected image in more detail.



PERFECT PROJECTION

Quickly adjust misaligned images with vertical keystone correction.




INSTALLATION

Integrated cable management design ensures security and protection. Fitted with the customised OPCUWM900 wall mount the cables are concealed to ensure a neat, tamper proof installation.



PROJECTION TILTING

For tabletop use as well as wall and floor projection.

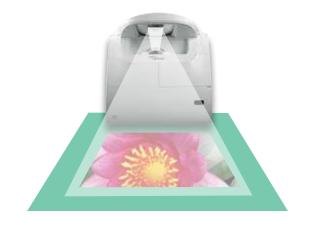

EX665UTis SPECIFICATIONS

Native Resolution	VGA 1024 v 769			
Display Technology	XGA 1024 x 768 Single 0.55" XGA DC3 DMD chip DLP® Technology			
Display lectificity	by Texas Instruments			
Brightness - BRIGHT mode ¹	3000 ANSI Lumens			
Contrast	3000 ANSI LUITIETIS 3000:1			
Moico Lovol	20dR (ECO modo)			
Noise Level Lamp Life ²	30dB (ECO mode) 3000 (ECO mode)			
Projections Lens	F Number 2.71			
Frojections Lens	Focus Length 4.423mm			
	Focus / Zoom Type Manual Focus / 2.0x Digital Zoom			
	Throw Ratio 0.3777:1 (Projection Distance:			
	Image Width)			
Projection Distance	0.5 - 0.8m			
Image Size	1.53 – 2.55m (60.18" – 100.25") Diagonal 4:3			
Offset	128.5% ±5%			
Weight / Dimensions (W x D x H)				
Remote Control	7.6 kg / 426.5 x 407 x 210mm (inc feet) Full function remote with direct source selecting			
INPUTS	HDMI (HDCP) - audio supported			
IIVI 013	2 x 15 Pin D-Sub VGA			
	S-Video 4 Pin Mini Din			
	Composite RCA			
	3.5mm Audio Mini Jack - Audio computer input			
	2 x Stereo RCA - Audio video input			
	Interactivity & USB (remote mouse)			
	IICI Roader - Type A			
	USB Reader - Type A USB Display - Mini USB			
	Microphone			
CONTROL	RS232 - 3 Pin Mini DIN			
CONTINUE	RJ45			
	Operation during standby mode - ECO standby must			
	be set to off]			
OUTPUT	3.5mm Audio Mini Jack			
0011 01	15 Pin D-Sub VGA			
	[Supported through VGA 1 only. Operation during standby			
	mode - ECO standby must be set to off]			
	+12v Tringer			
Audio	+12v Trigger 10W Speaker			
Aspect Ratio	4:3 Native, 16:9/16:10 Compatible ± 40° Vertical			
Keystone Correction	± 40° Vertical			
On Screen Display	19 Languages: English, German, French, Italian, Spanish.			
, ,	Portuguese, Polish, Dutch, Russian, Finnish, Swedish, Greek, Norwegian/Danish, Hungarian, Czech, Turkish,			
	Greek, Norwegian/Danish, Hungarian, Czech, Turkish,			
	Farsi, Arabic & Romanian			
Compatible Resolutions	UXGA, SXGA, WXGA, HD, XGA, SVGA			
Video Compatibility	PAL SECAM 576i/p, NTSC 480i/p, HD 720p/1080i/1080p			
Uniformity	85%			
Displayable Colours	1.07 Billion			
Horizontal Scan Rate	15 - 91kHz			
Vertical Scan Rate	24 - 85Hz (120Hz for 3D)			
	24 - 65HZ (120HZ 101 5D)			
Power Supply	24 - 85Hz (120Hz for 3D) 100 - 240V, 50 - 60Hz			
Power Supply Power Consumption	365W BRIGHT mode < 0.5W Standby mode			
Power Supply Power Consumption	365W BRIGHT mode < 0.5W Standby mode 325W FCO mode < 0.5W Standby mode			
Power Supply Power Consumption Operating Conditions	365W BRIGHT mode < 0.5W Standby mode 325W ECO mode < 0.5W Standby mode Operating: 5 - 40°C 85% Humidity (Max) 3000m Altitude (Max)			
Power Supply Power Consumption Operating Conditions Security	365W BRIGHT mode < 0.5W Standby mode 325W ECO mode < 0.5W Standby mode Operating: 5 - 40°C, 85% Humidity (Max), 3000m Altitude (Max) Security Bar. Kensinoton "Lock Port. Password Protection			
Power Supply Power Consumption Operating Conditions	365W BRIGHT mode < 0.5W Standby mode 325W ECO mode < 0.5W Standby mode Operating: 5 - 40°C, 85% Humidity (Max), 3000m Altitude (Max) Security Bar. Kensinoton "Lock Port. Password Protection			
Power Supply Power Consumption Operating Conditions Security	365W BRIGHT mode < 0.5W Standby mode 325W ECO mode < 0.5W Standby mode Operating: 5 - 40°C, 85% Humidity (Max), 3000m Altitude (Max) Security Bar, Kensington Lock Port, Password Protection Lens Cover, AC Power Cord, VGA Cable, Interactive Pen, Full Function Remote, Batteries x 4, Quick Start Guide, CD User			
Power Supply Power Consumption Operating Conditions Security Standard Accessories	365W BRIGHT mode < 0.5W Standby mode 325W ECO mode < 0.5W Standby mode Operating: 5 - 40°C, 85% Humidity (Max), 3000m Altitude (Max) Security Bar, Kensington Lock Port, Password Protection Lens Cover, AC Power Cord, VGA Cable, Interactive Pen, Full Function Remote, Batteries x 4, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card, WizTeach CD (software)			
Power Supply Power Consumption Operating Conditions Security Standard Accessories RoHS	365W BRIGHT mode < 0.5W Standby mode 325W ECO mode < 0.5W Standby mode Operating: 5 - 40°C, 85% Humidity (Max), 3000m Altitude (Max) Security Bar, Kensington ** Lock Port, Password Protection Lens Cover, 4C Power Cord, VGA Cable, Interactive Pen, Full Function Remote, Batteries x 4, Quick Start Guide, CD User Manual, Warramty Card, WEEE Card, WizTeach CD (software) Compliant			
Power Supply Power Consumption Operating Conditions Security Standard Accessories RoHS Lamp Warranty	365W BRIGHT mode < 0.5W Standby mode 325W ECO mode < 0.5W Standby mode Operating: 5 - 40°C, 85% Humidity (Max), 3000m Altitude (Max) Security Bar, Kensington Lock Port, Password Protection Lens Cover, AC Power Cord, VGA Cable, Interactive Pen, Full Function Remote, Batteries x 4, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card, WizTeach CD (software) Compliant 1 year or 2000 hours - whichever comes sooner			
Power Supply Power Consumption Operating Conditions Security Standard Accessories RoHS	365W BRIGHT mode < 0.5W Standby mode 325W ECO mode < 0.5W Standby mode Operating: 5 - 40°C, 85% Humidity (Max), 3000m Altitude (Max) Security Bar, Kensington™ Lock Port, Password Protection Lens Cover, AC Power Cord, VGA Cable, Interactive Pen, Full Function Remote, Batteries x 4, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card, WizTeach CD (software) Compilant 1 year or 2000 hours - whichever comes sooner Warranty may vary by country. Please see			
Power Supply Power Consumption Operating Conditions Security Standard Accessories ROHS Lamp Warranty Warranty	365W BRIGHT mode < 0.5W Standby mode 325W ECO mode < 0.5W Standby mode Operating: 5 - 40°C, 85% Humidity (Max), 3000m Altitude (Max) Security Bar, Kensington Lock Port, Password Protection Lens Cover, AC Power Cord, VGA Cable, Interactive Pen, Full Function Remote, Batteries x 4, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card, WizTeach CD (software) Compliant 1 year or 2000 hours - whichever comes sooner Warranty may vary by country. Please see Warwootpomaeurope.com or ask your local supplier for details			
Power Supply Power Consumption Operating Conditions Security Standard Accessories RoHS Lamp Warranty Warranty Colour Guarantee ³	365W BRIGHT mode < 0.5W Standby mode 325W ECO mode < 0.5W Standby mode Operating: 5 - 40°C, 85% Humidity (Max), 3000m Altitude (Max) Security Bar, Kensington Lock Port, Password Protection Lens Cover, AC Power Cord, VGA Cable, Interactive Pen, Full Function Remote, Batteries x 4, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card, WizTeach CD (software) Compliant 1 year or 2000 hours - whichever comes sooner Warranty may vary by country, Please see www.optomaeurope.com or ask your local supplier for details 5 Years			
Power Supply Power Consumption Operating Conditions Security Standard Accessories ROHS Lamp Warranty Warranty Colour Guarantee ³ Imager Guarantee ⁴	365W BRIGHT mode < 0.5W Standby mode 325W ECO mode < 0.5W Standby mode Operating: 5 - 40°C, 85% Humidity (Max), 3000m Altitude (Max) Security Bar, Kensington "Lock Port, Password Protection Lens Cover, AC Power Cord, VGA Cable, Interactive Pen, Full Function Remote, Batteries x 4, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card, WizTeach CD (software) Compliant 1 year or 2000 hours - whichever comes sooner Warranty may vary by country. Please see www.optomaeurope.com or ask your local supplier for details 5 Years 5 Years			
Power Supply Power Consumption Operating Conditions Security Standard Accessories RoHS Lamp Warranty Warranty Colour Guarantee ³	365W BRIGHT mode < 0.5W Standby mode 325W ECO mode < 0.5W Standby mode Operating: 5 - 40°C, 85% Humidity (Max), 3000m Altitude (Max) Security Bar, Kensington Lock Port, Password Protection Lens Cover, AC Power Cord, VGA Cable, Interactive Pen, Full Function Remote, Batteries x 4, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card, WizTeach CD (software) Compliant 1 year or 2000 hours - whichever comes sooner Warranty may vary by country. Please see www.optomaeurope.com or ask your local supplier for details 5 Years 5 Years 120Hz frame sequential 3D for resolutions up to 720p.			
Power Supply Power Consumption Operating Conditions Security Standard Accessories RoHS Lamp Warranty Warranty Colour Guarantee ³ Imager Guarantee ⁴ 3D Support	365W BRIGHT mode < 0.5W Standby mode 325W ECO mode < 0.5W Standby mode Operating: 5 - 40°C, 85% Humidity (Max), 3000m Altitude (Max) Security Bar, Kensington Lock Port, Password Protection Lens Cover, AC Power Cord, VGA Cable, Interactive Pen, Full Function Remote, Batteries x 4, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card, WizTeach CD (software) Compliant 1 year or 2000 hours - whichever comes sooner Warranty may vary by country. Please see www.optomaeurope.com or ask your local supplier for details 5 Years 5 Years 120Hz frame sequential 3D for resolutions up to 720p.			
Power Supply Power Consumption Operating Conditions Security Standard Accessories ROHS Lamp Warranty Warranty Colour Guarantee ³ Imager Guarantee ⁴	365W BRIGHT mode < 0.5W Standby mode 325W ECO mode < 0.5W Standby mode Operating: 5 - 40°C, 85% Humidity (Max), 3000m Altitude (Max) Security Bar, Kensington™ Lock Port, Password Protection Lens Cover, AC Power Cord, VGA Cable, Interactive Pen, Full Function Remote, Batteries x 4, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card, WizTeach CD (software) Compliant 1 year or 2000 hours - whichever comes sooner Warranty may vary by country, Please see www.optomaeurope.com or ask your local supplier for details 5 Years 5 Years 120Hz frame sequential 3D for resolutions up to 720p. 60Hz field sequential 3D for resolutions up to 480i Requires Optoma DLP® Link™ active shutter glasses			
Power Supply Power Consumption Operating Conditions Security Standard Accessories RoHS Lamp Warranty Warranty Colour Guarantee ³ Imager Guarantee ⁴ 3D Support 3D Viewing	365W BRIGHT mode < 0.5W Standby mode 325W ECO mode < 0.5W Standby mode Operating: 5 - 40°C, 85% Humidity (Max), 3000m Altitude (Max) Security Bar, Kensington™ Lock Port, Password Protection Lens Cover, AC Power Cord, VGA Cable, Interactive Pen, Full Function Remote, Batteries x 4, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card, WizTeach CD (software) Compliant 1 year or 2000 hours - whichever comes sooner Warranty may vary by country, Please see www.optomaeurope.com or ask your local supplier for details 5 Years 5 Years 120Hz frame sequential 3D for resolutions up to 720p. 60Hz field sequential 3D for resolutions up to 480i Requires Optoma DLP® Link™ active shutter glasses			
Power Supply Power Consumption Operating Conditions Security Standard Accessories RoHS Lamp Warranty Warranty Colour Guarantee ³ Imager Guarantee ⁴ 3D Support	365W BRIGHT mode < 0.5W Standby mode 325W ECO mode < 0.5W Standby mode Operating: 5 - 40°C, 85% Humidity (Max), 3000m Altitude (Max) Security Bar, Kensington™ Lock Port, Password Protection Lens Cover, AC Power Cord, VGA Cable, Interactive Pen, Full Function Remote, Batteries x 4, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card, WizTeach CD (software) Compliant 1 year or 2000 hours - whichever comes sooner Warranty may vary by country, Please see www.optomaeurope.com or ask your local supplier for details 5 Years 5 Years 120Hz frame sequential 3D for resolutions up to 720p. 60Hz field sequential 3D for resolutions up to 480i Requires Optoma DLP® Link™ active shutter glasses			
Power Supply Power Consumption Operating Conditions Security Standard Accessories RoHS Lamp Warranty Warranty Colour Guarantee ³ Imager Guarantee ⁴ 3D Support 3D Viewing	365W BRIGHT mode < 0.5W Standby mode 325W ECO mode < 0.5W Standby mode Operating: 5 - 40°C, 85% Humidity (Max), 3000m Altitude (Max) Security Bar, Kensington™ Lock Port, Password Protection Lens Cover, AC Power Cord, VGA Cable, Interactive Pen, Full Function Remote, Batteries x 4, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card, WizTeach CD (software) Compliant 1 year or 2000 hours - whichever comes sooner Warranty may vary by country, Please see www.optomaeurope.com or ask your local supplier for details 5 Years 5 Years 120Hz frame sequential 3D for resolutions up to 720p. 60Hz field sequential 3D for resolutions up to 480i Requires Optoma DLP® Link™ active shutter glasses			
Power Supply Power Consumption Operating Conditions Security Standard Accessories RoHS Lamp Warranty Warranty Colour Guarantee ³ Imager Guarantee ⁴ 3D Support 3D Viewing	365W BRIGHT mode < 0.5W Standby mode 325W ECO mode < 0.5W Standby mode Operating: 5 - 40°C, 85% Humidity (Max), 3000m Altitude (Max) Security Bar, Kensington™ Lock Port, Password Protection Lens Cover, AC Power Cord, VGA Cable, Interactive Pen, Full Function Remote, Batteries x 4, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card, WizTeach CD (software) Compliant 1 year or 2000 hours - whichever comes sooner Warranty may vary by country, Please see www.optomaeurope.com or ask your local supplier for details 5 Years 5 Years 120Hz frame sequential 3D for resolutions up to 720p. 60Hz field sequential 3D for resolutions up to 480i Requires Optoma DLP® Link™ active shutter glasses			
Power Supply Power Consumption Operating Conditions Security Standard Accessories RoHS Lamp Warranty Warranty Colour Guarantee ³ Imager Guarantee ⁴ 3D Support 3D Viewing	365W BRIGHT mode < 0.5W Standby mode 325W ECO mode < 0.5W Standby mode Operating: 5 - 40°C, 85% Humidity (Max), 3000m Altitude (Max) Security Bar, Kensington™ Lock Port, Password Protection Lens Cover, AC Power Cord, VGA Cable, Interactive Pen, Full Function Remote, Batteries x 4, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card, WizTeach CD (software) Compliant 1 year or 2000 hours - whichever comes sooner Warranty may vary by country, Please see www.optomaeurope.com or ask your local supplier for details 5 Years 5 Years 120Hz frame sequential 3D for resolutions up to 720p. 60Hz field sequential 3D for resolutions up to 480i Requires Optoma DLP® Link™ active shutter glasses			
Power Supply Power Consumption Operating Conditions Security Standard Accessories RoHS Lamp Warranty Warranty Colour Guarantee ³ Imager Guarantee ⁴ 3D Support 3D Viewing	365W BRIGHT mode < 0.5W Standby mode 325W ECO mode < 0.5W Standby mode Operating: 5 - 40°C, 85% Humidity (Max), 3000m Altitude (Max) Security Bar, Kensington™ Lock Port, Password Protection Lens Cover, AC Power Cord, VGA Cable, Interactive Pen, Full Function Remote, Batteries x 4, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card, WizTeach CD (software) Compliant 1 year or 2000 hours - whichever comes sooner Warranty may vary by country, Please see www.optomaeurope.com or ask your local supplier for details 5 Years 5 Years 120Hz frame sequential 3D for resolutions up to 720p. 60Hz field sequential 3D for resolutions up to 480i Requires Optoma DLP® Link™ active shutter glasses			
Power Supply Power Consumption Operating Conditions Security Standard Accessories RoHS Lamp Warranty Warranty Colour Guarantee ³ Imager Guarantee ⁴ 3D Support 3D Viewing	365W BRIGHT mode < 0.5W Standby mode 325W ECO mode < 0.5W Standby mode Operating: 5 - 40°C, 85% Humidity (Max), 3000m Altitude (Max) Security Bar, Kensington "Lock Port, Password Protection Lens Cover, 4C Power Cord, VGA Cable, Interactive Pen, Full Function Remote, Batteries x 4, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card, WizTeach CD (software) Compliant 1 year or 2000 hours - whichever comes sooner Warranty may vary by country. Please see www.optomaeurope.com or ask your local supplier for details 5 Years 5 Years 120Hz frame sequential 3D for resolutions up to 720p. 60Hz field sequential 3D for resolutions up to 480i Requires Optoma DLP® Link" active shutter glasses			

Optoma Accessories						
Projector Wall Mount - Part number: OPCUWM900						
72	Wall mount for the EX665UTis					
10 - Ex-	Telescopic mount with height adjustment plate for versatile installation.					
	Maximum projector image of 100" diagonal with the EX665UTis.					
Lamp - Part number: SP.8JA01GC01						
	Optoma genuine lamp modules are designed and tested to work specifically with your Optoma projector to ensure quality, good performance and longevity.					
Interactive Pen - SP.8JR01GC01						
	Replacement/additional pen if required.					
Mini Wi-Fi Dongle - SP.8JQ02G	GC01					
Wireless projection for presentat	ions and video. (Audio not supported)					

EASY TO USE REMOTE CONTROL

EX665UTis Remote Control


- 1 Power
- 2 Remote Mouse
- 3 Page Up/Down control
- 4 Enter/Help
- 5 Vertical Keystone Adjustment
- 6 Volume Control
- 7 Brightness Adjustment
- 8 3D Control
- 9 Direct Input Source Selection
- 10 Freeze Control
- 11 AV Mute

EX665UTis Connections

- 12 +12v Trigger
- 13 Audio In (VGA 1 & 2)
- **14** RS232
- 15 Composite Video
- 16 S-Video
- 17 VGA 1- Scart & Component
- 18 VGA Out
- 19 HDMI (audio supported)
- 20 Interactivity & USB (Remote Mouse)
- 21 Audio Out
- 22 Microphone
- 23 Audio In (S-Video & Composite)
- 24 VGA 2 Component
- **25** RJ45
- 26 USB Reader
- 27 USB Display

2 3 4 5 6 7 8 9

Exceptional Connectivity / Multiple Terminals

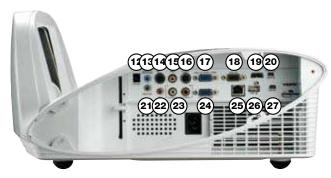

Projection Distance 0.5 - 0.8m XGA (4:3 Aspect Ratio)								
Distance from screen to projector (m)	Projection Distance from mirror (m)	Horizontal Image Size (m)	Vertical Image Size (m)	Diagonal Im- age Size (m)	Diagonal Image Size (inch)	Image Offset (m)		
0.119	0.461	1.223	0.917	1.529	60.18	0.261		
0.157	0.499	1.324	0.993	1.655	65.14	0.283		
0.196	0.538	1.427	1.070	1.784	70.23	0.305		
0.234	0.576	1.528	1.146	1.910	75.19	0.327		
0.250	0.592	1.570	1.178	1.963	77.28	0.336		
0.273	0.615	1.631	1.223	2.039	80.28	0.349		
0.310	0.652	1.729	1.297	2.162	85.11	0.370		
0.426	0.768	2.037	1.528	2.546	100.25	0.435		

For guide purposes only

EX665UTis is capable of 16:9/16:10 aspect ratio projection. When projecting a 16:9/16:10 image the image sizes, screen height and offset information will differ from the above.

