

EzPro 610H

PROJECTOR

Ultra Bright! 1250 ANSI Lumens

High Portability! Only 8.9 lbs. (4.0 kgs)

True SVGA, 800 X 600 Addressable Pixels

Luxurious carrying case with detachable wheels and handle

Advanced Electronic Keystone Correction Function

Real Plug and Play with Auto-Image Function

User-Friendly Multilingual On-Screen Menu Adjustment



**Ultra Bright Multimedia
Portable Projector**

ULtra

HIGH BRIGHT

multimedia

PORTABLE PROJECTOR


www.optoma.com

EzPro 610H

PROJECTOR

SPECIFICATIONS



LCD Panel

0.9" Poly-Si Active Matrix TFT LCD X3

Resolution

True SVGA 800 (H) X 600 (V)
Compressed XGA and VGA resizing

Contrast Ratio

350:1 (Typical)

Uniformity

80%

Displayable Colours

16.7M colours

Brightness

1250 ANSI Lumens

Projection Lens

1:1.3 Manual Zoom & Focus Lens
f=38-50mm, F/ 1.8-2.0

Projection Screen Size

20" (0.5m) ~ 260" (6.6m) Diagonal

Projection Distance

3.8" (1.2m) ~ 36' (11m)

Horizontal Scan Rate

15 - 69 KHz

Vertical Refresh Rate

50 - 85 Hz

Lamp Type

150W User Replaceable UHP Lamp

Lamp Life

Up to 2000 hours

Computer Compatibility

XGA (Compressed), VGA, SVGA,
Apple Macintosh, NEC PC98 Series,
Fujitsu FM Towns

Video Compatibility

NTSC / PAL / SECAM Compatible

Audio

One internal speaker with 3 watts output
Built-in Amplifier with 3 watts output

Weight

8.9 lbs. (4.0 Kgs)

Dimension

8.8 X 4.3 X 14.1 inches / 224 X 109 X 359mm

Power Supply

AC input 100-240V, 50/60 Hz

Power Consumption

210 watts at normal operation

Operation Temperature


10°C ~ 35°C / 50°F ~ 104°F

Standard Accessories

AC power cord, 15-pin VGA signal cable,
Remote Control, S-video cable,
RCA video/audio cable, Audio Input cable,
Multilingual user's manual, Warranty card,
Carrying case with detachable wheels and handle

Optional Accessories

Replacement lamp, Ceiling mount kit, Soft carrying case

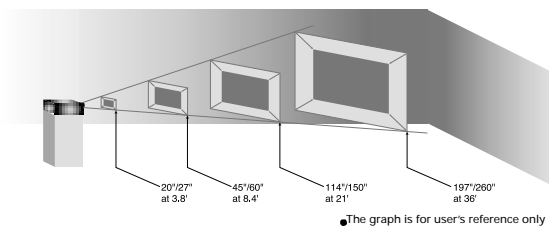


Projector Distance and Image Size

Distance	Min.zoom	Max.zoom
3.8'/1.2m	20"/1.7'/0.5m	27"/2.3'/0.7m
8.4'/2.6m	45"/3.8'/1.1m	60"/5'/1.5m
14'/4.3m	76"/6.3'/1.9m	100"/8.3'/2.5m
21'/6.4m	114"/9.5'/2.9m	150"/12.5'/3.8m
28'/8.5m	153"/12.8'/3.9m	200"/16.7'/5.1m
36'/11.0m	197"/16.4'/5.0m	260"/1.7'/6.6m



Connector Ports

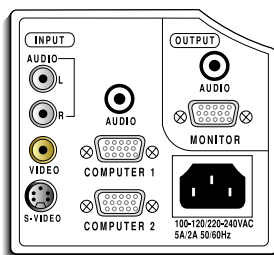

Specification are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Optoma Worldwide Location

Optoma Europe Ltd

Tel: 44-1923-691-800

Fax: 44-1923-691-888

marketing@optoma.co.uk

www.optoma.com

Optoma Deutschland GmbH

Tel: 49-211-641-3570

Fax: 49-211-641-3571

Optoma Technology Inc.

Tel: 1-408-541-6060

Fax: 1-408-541-6068

Optoma Japan Co., Ltd.

Tel: 81-3-5363-2461

Fax: 81-3-5363-3241

Optoma (China & H.K.) Ltd

Tel: 852-2369-8968

Fax: 852-2370-1222

Optoma Korea Co., Ltd

Tel: 82-417-562-7277

Fax: 82-417-562-7276

Optoma Corp.

Tel: 886-3-577-2000

Fax: 886-3-579-7957

