

ViewSonic LED Projector Solution

PLED-W200
PLED-W500

ViewSonic®

ViewSonic®
See the difference™


World's First WXGA Pocket Short-throw Projectors

PLED-W200/ PLED-W500

ViewSonic is not only committed to produce great products that fit your business needs, but also to being environmentally responsible. Our LED projector is a portable solution that is designed to be energy-efficient as well. With a long-life LED light source replacing the traditional projection lamp, there is less maintenance hassle and a significantly-reduced environmental impact compared to disposing mercury-filament lamp.



Model Name	PLED-W200	
DISPLAY	Resolution	1280(H) x 800(V)
	Size	24"-80"
	Throw Distance	0.6 - 2.0 meter (1.96 - 6.56 feet)
	Throw Ratio	1.16 (40" @1m)
	Lamp	50 watt
	Lamp Life (Normal / Eco Mode)	2000 (hours)
	Brightness (Max.)	200 Lumens
	Contrast Ratio (Max.)	2000:1
	Aspect Ratio	16:10(Native)
	Color Depth	24 bits, 16.7M Colors (8+8+8)
	Color Gamut	120% NTSC 1931 CIE
AUDIO	Speaker	2W x2
INPUT SIGNAL	Computer and video	NTSC M (3.58 MHz), 4.43MHzPAL (B, D, G, H, I, M, N, 60) SECAM (B, D, G, K, K1, L) 480i and 576i 480p and 576p 720p, 1080i, 1080p Fv: 30-100 KHz, Fv: 50-85 Hz
COMPATABILITY	PC	VGA to HD 1080
CONNECTOR	Mac	Up to 1400x1050 (may require Mac Adapter)
	RGB Input	1x15-pin mini D-sub
	Composite Input	1xRCA jack
	S-Video Input	
	Audio Input	3.5mm Mini-Mono Jack (x1) in CEA cable
	Control	IR sensor x1
	USB	Mini USB B x1 (USB display)USB Type A (x1) in CEA cable for firmware upgrade
POWER	Card reader	-
	RAM	
	Voltage	100-240VAC(Auto Switching), 50/60Hz (universal)
	Power Consumption	50W (Typical) / <1W
LANGUAGE		English/ France / Germany/ Italian/ Spanish/ Russian/ T Chinese/ SChinese/ Japanese/ Korean/ Swedish/ Dutch/ Turkish/ Portuguese/ Polish/
OPERATING	Temperature	0°C-40°C (32°F-104°F)
CONDITION	Humidity	10%-90% (non-condensing)
DIMENSIONS	Physical	125 mm (W) x 131mm (D) x 33 mm (H)
	(WxHxD, mm / inch)	4.9" (W) x 5.2" (D) x 1.3" (H)
WEIGHT	Net	420g (0.92lb)
REGULATIONS		CE, CB, UL, cUL, FCC (including ICES-003), NOM, TUV-S Argentina ,RoHS

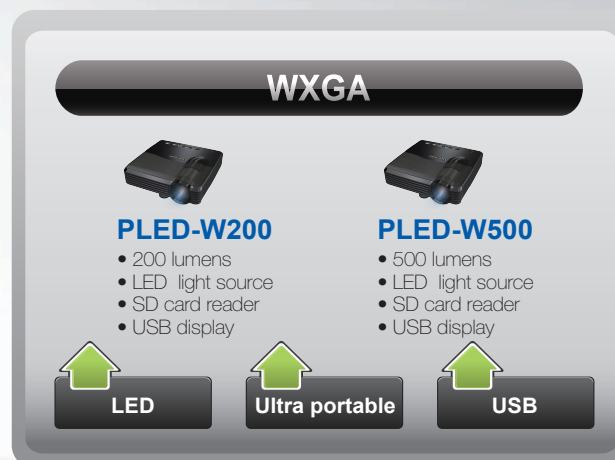

Model Name	PLED-W500	
DISPLAY	Resolution	1280(H) x 800(V)
	Size	30"-80"
	Throw Distance	0.91 - 2.4 meter (2.98 - 7.87 feet)
	Throw Ratio	1.4(33" @1m)
	Lamp	50 watt
	Lamp Life (Normal / Eco Mode)	2000 (hours)
	Brightness (Max.)	200 Lumens
	Contrast Ratio (Max.)	2000:1
	Aspect Ratio	16:10(Native)
	Color Depth	24 bits, 16.7M Colors (8+8+8)
	Color Gamut	120% NTSC 1931 CIE
AUDIO	Speaker	2W x2
INPUT SIGNAL	Computer and video	NTSC M (3.58 MHz), 4.43MHzPAL (B, D, G, H, I, M, N, 60) SECAM (B, D, G, K, K1, L) 480i and 576i 480p and 576p 720p, 1080i, 1080p Fv: 30-100 KHz, Fv: 50-85 Hz
COMPATABILITY	PC	VGA to HD 1080
CONNECTOR	Mac	Up to 1400x1050 (may require Mac Adapter)
	RGB Input	1x15-pin mini D-sub
	Composite Input	1xRCA jack
	S-Video Input	x1
	Audio Input	3.5mm Mini-Mono Jack (x1)
	Control	IR sensor x1
	USB	"Mini USB B x1 (USB display and firmware upgrade)USB Type A (x1)" SD x1
POWER	Card reader	512k
	RAM	
	Voltage	100-240VAC(Auto Switching), 50/60Hz (universal)
	Power Consumption	50W (Typical) / <1W
LANGUAGE		English/ France / Germany/ Italian/ Spanish/ Russian/ T Chinese/ SChinese/ Japanese/ Korean/ Swedish/ Dutch/ Turkish/ Portuguese/ Thai/ Polish/ Finnish
OPERATING	Temperature	0°C-40°C (32°F-104°F)
CONDITION	Humidity	10%-90% (non-condensing)
DIMENSIONS	Physical	290 mm (W) x 254mm (D) x 126 mm (H)
	(WxHxD, mm / inch)	11.42" (W) x 10" (D) x 4.96" (H)
WEIGHT	Net	1.3Kg (3lb)
REGULATIONS		CE, CB, UL, cUL, FCC (including ICES-003), NOM, TUV-S Argentina ,RoHS

ViewSonic LED Projector Solution

- 1. High Resolution**
PLED-Series is the world's first WXGA pocket projector. The superior resolution and color performance make this projector suitable for presentations as well as for home entertainment.
- 2. Long-Life Light Source**
The ViewSonic PLED-Series has a 20,000-hour LED light source, so that users can save lamp-changing cost and be kind to the Earth.
- 3. Pocket-Sized**
With the diminutive dimensions, the PLED-Series is light-weight and can be easily carried home in a briefcase.
- 4. Short Throw (60" at 1.54m)**
With a throw ratio of 1.16, the PLED-W200 can project a 60" screen from only a 1.54m distance.
- 5. Multimedia Interface**
The PLED-Series has a built-in SD card reader, from which videos or image files can be shown without a PC or a notebook.
- 6. PC-Free Microsoft Office Reader**
PLED-W200 is designed to provide high-impact presentations without the necessity of PC or notebook. The PC-Free Office reader feature gives access to Microsoft Office files via simple USB or SD card plug-and-play operation, enabling you to enjoy powerful and professional portable projection.