

EzPro 715H

PROJECTOR

Ultra Portable Multimedia Projector

Only 5 lbs. (2.3 kgs) Compact Design

1000 ANSI Lumens High Brightness and Outstanding 400:1 Contrast

Manual Zoom and Focus Making Set-up Easy

Advanced DLP™ Technology for a Vivid and Clear Image

Picture in Picture Function and Digital Keystone Correction

Full Function Remote with Mouse Control and Laser Pointer

Includes Luxurious Carrying Case and all Necessary Cables

Real Plug and Play with Auto Image Function



Optoma
www.optoma.com

DLP™
A TEXAS INSTRUMENTS TECHNOLOGY

EzPro 715H

PROJECTOR

SPECIFICATIONS



Display

Digital Light Processing (DLP™) technology
by Texas Instruments

Resolution

XGA 1024 pixels (H) x 768 lines (V)

Computer Compatibility

SXGA (compressed), XGA, SVGA, VGA, Macintosh,
NEC PC98 series, and Fujitsu FM Towns

Video Compatibility

NTSC, NTSC 4.43, PAL, PAL-M/N and SECAM

Aspect Ratio

4:3, 16:9 Compatible

Contrast Ratio

400:1 (Full On/Off), 200:1 (Checkerboard)

Displayable Colors

16.7M Colors

Brightness

1000 ANSI Lumens

Projection Lens

F=2.8~3.1, f=31~40mm
1:1.3 manual zoom and focus

Projection Screen Size

17" (0.4m)~222" (5.6m) diagonal

Throw Distance

3.3'(1m)~32.8'(10m)

Horizontal Scan Rate

25-92 kHz

Vertical Refresh Rate

43-85 Hz

Lamp Type

150 W user replaceable P-VIP lamp

Lamp Life

1500 hours

Keystone Correction

+/- 16 degrees

Audio

One internal speaker with 3 watts output

Weight

5lbs (2.3kgs)

Remote Control

Remote mouse with laser pointer

Power Supply

AC input 90-264V auto-switching power supply

Power Consumption

210 Watts at Normal Operation

Operation Temperature



10°C~40°C / 50°F~104°F

Standard Accessories


AC power cord, VGA signal cable, Audio cables,
Composite video cable, S-Video signal cable,
Wireless remote mouse set, Carrying case,
Lens cap, Warranty card, User's manual

Projection Distance	Min. Image Size	Max. Image Size
39" / 3.3' / 1m	17" / 1.4' / 0.4m	22" / 1.8' / 0.6m
79" / 6.6' / 2m	34" / 2.9' / 0.9m	44" / 3.7' / 1.1m
118" / 9.8' / 3m	51" / 4.3' / 1.3m	67" / 5.5' / 1.7m
158" / 13.1' / 4m	69" / 5.7' / 1.7m	89" / 7.4' / 2.3m
197" / 16.4' / 5m	86" / 7.1' / 2.2m	111" / 9.2' / 2.8m
236" / 19.7' / 6m	103" / 8.6' / 2.6m	133" / 11.1' / 3.4m
276" / 23.0' / 7m	120" / 10.0' / 3.0m	156" / 12.9' / 3.9m
315" / 26.2' / 8m	137" / 11.4' / 3.5m	177" / 14.8' / 4.5m
354" / 29.5' / 9m	154" / 12.9' / 3.9m	200" / 16.6' / 5.1m
394" / 32.8' / 10m	171" / 14.3' / 4.4m	222" / 18.5' / 5.6m

Projection Screen Size

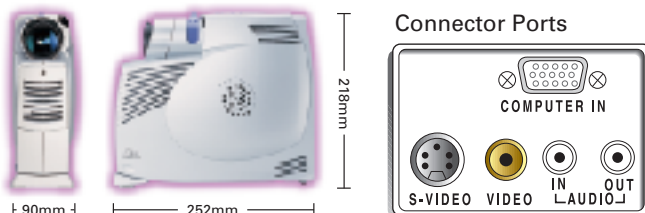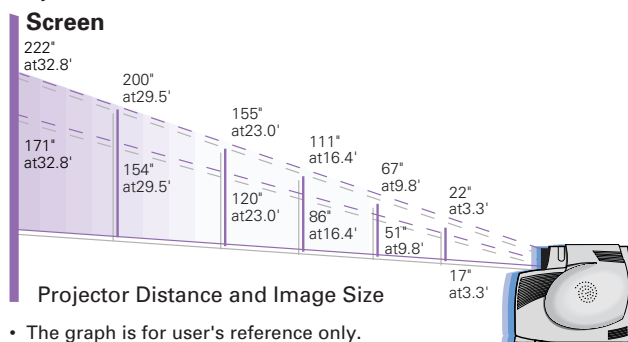

Connector Ports



Specification are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.
DLP™ and DMD™ Device are registered trademarks of Texas Instruments Incorporated.

Optoma Worldwide Location

Optoma Europe Ltd.	Tel: 44-1923-691-800	Fax: 44-1923-691-888
Optoma Technology Inc.	Tel: 1-408-383-3700	Fax: 1-408-383-3701
Optoma Deutschland GmbH.	Tel: 49-211-506-6670	Fax: 49-211-506-66799
Optoma Japan Co., Ltd.	Tel: 81-3-5363-2461	Fax: 81-3-5363-3241
Optoma (China & H.K.) Ltd.	Tel: 852-2396-8968	Fax: 852-2370-1222
Optoma Korea Co., Ltd.	Tel: 82-417-562-7277	Fax: 82-417-562-7276
Optoma Corp.	Tel: 886-3-577-2000	Fax: 886-3-579-7957

marketing@optoma.co.uk

Optoma
www.optoma.com