

EzPro 718

PR  JECTOR

True XGA, 1024X768 Addressable Pixels
1100 ANSI Lumens High Brightness
Only 5 lbs. (2.3 Kgs) Compact Design
Manual Zoom and Focus Function
Advanced Electronic Keystone Correction
Real Plug & Play with Auto-Image Function
User Friendly Multilingual On-Screen Menu Adjustment
Picture in Picture Dual Source Display
Remote Mouse with Laster Pointer

Micro Portable Ultra Light Multimedia Projector



 Optoma
www.optoma.com

EzPro 718

PROJECTOR



SPECIFICATIONS

Display

Digital Light Processing™(DLP) technology
by Texas Instruments

Resolution

True XGA 1024 pixels (H) x 768 lines (V)

Computer Compatibility

SXGA (Compressed), XGA, VGA, SVGA
Macintosh, NEC PC98 Series,
and Fujitsu FM Towns

Video Compatibility

NTSC, NTSC 4.43, PAL, PAL-M/N and SECAM

Aspect Ratio

4:3, 16:9 Compatible

Contrast Ratio

400:1 (Full On/Off), 200:1 (Checkerboard)

Displayable Colours

16.7M colours

Brightness

1100 ANSI Lumens

Projection Lens

F=2.8~3.1, f=31~40mm
1:1.3 manual zoom and focus

Projection Screen Size

21" (0.5m)-300" (7.6m) diagonal

Throw Distance

3.3' (1m)~36.1'(11m)

Horizontal Scan Rate

30-92 kHz

Vertical Refresh Rate

50-85 Hz

Lamp Type

150W user replaceable P-VIP lamp

Lamp Life

1,500 hours

Keystone Correction

+/- 16 degree

Audio

One internal speaker with 3 watts output

Weight

5 lbs. (2.3kgs)

Remote Control

Remote mouse with laser pointer

Power Supply

AC input 90-264V auto-switching power supply

Power Consumption

220W (max.)

Operation Temperature



10°C~40°C / 50°F~104°F

Standard Accessories

AC power cord, VGA signal cable, Audio cables,
Composite video cable, S-video signal cable,
Lens cap, User's manual, Wireless remote mouse set,
Carrying case, Warranty card

Projection Distance	Min. Image Size	Max. Image Size
3.3' / 1m	21" / 1.8' / 0.5m	28" / 2.3' / 0.7m
6.6' / 2m	42" / 3.5' / 1.1m	55" / 4.6' / 1.4m
9.8' / 3m	64" / 5.3' / 1.6m	83" / 6.9' / 2.1m
13.1' / 4m	84" / 7.0' / 2.1m	110" / 9.1' / 2.8m
16.4' / 5m	106" / 8.8' / 2.7m	137" / 11.5' / 3.5m
19.7' / 6m	127" / 10.5' / 3.2m	165" / 13.7' / 4.2m
23.0' / 7m	148" / 12.3' / 3.8m	192" / 16.0' / 4.9m
26.2' / 8m	169" / 14.1' / 4.3m	219" / 18.3' / 5.6m
29.5' / 9m	190" / 15.8' / 4.8m	247" / 20.6' / 6.3m
32.8' / 10m	211" / 17.6' / 5.4m	275" / 22.9' / 7.0m
36.1' / 11m	223" / 18.6' / 5.7m	300" / 25.0' / 7.6m

Projection Screen Size

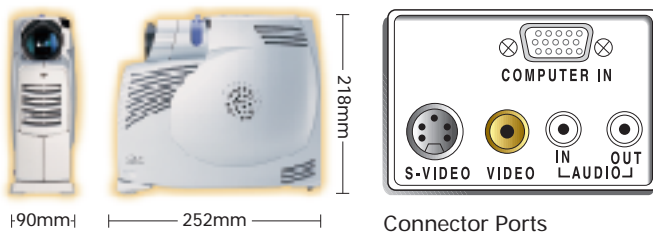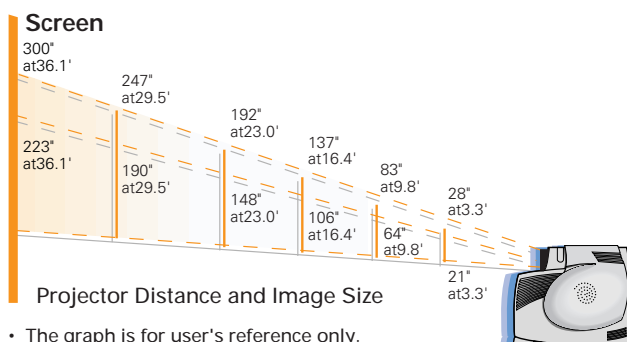

Specification are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.
DLP™ and DMD™ Device are registered trademarks of Texas Instruments Incorporated.

Optoma Worldwide Location

Optoma Europe Ltd.	Tel: 44-1923-691-800	Fax: 44-1923-691-888	marketing@optoma.co.uk
Optoma Deutschland Gmbh.	Tel: 49-211-506-6670	Fax: 49-211-506-66799	
Optoma Technology Inc.	Tel: 1-408-383-3700	Fax: 1-408-383-3701	
Optoma Japan Co., Ltd.	Tel: 81-3-5363-2461	Fax: 81-3-5363-3241	
Optoma (China & H.K.) Ltd.	Tel: 852-2396-8968	Fax: 852-2370-1222	
Optoma Korea Co., Ltd.	Tel: 82-417-562-7277	Fax: 82-417-562-7276	
Optoma Corp.	Tel: 886-3-577-2000	Fax: 886-3-579-7957	

Optoma
www.optoma.com