



D825MS & D825MX SVGA & XGA DLP® PROJECTOR

Mobile Business. Mobile Professionals.



Latest DLP® and BrilliantColor™ Technology with 2600 Lumens of Brightness

The all new D825MS and D825MX are part of Vivitek's line of mobile projectors that use the latest DLP® technology from Texas Instruments that enables you to display outstanding images and features BrilliantColor™ for exceptional brightness and vibrant colors. It offers the versatile features that come with a cost efficient lamp life of up to 4,000 hours, 2200:1 contrast ratio that shows extraordinary crisp details and 2600 lumens of superior brightness that provides excellent projection under any lighting conditions.

Filter-Free Design

No filter require, resistant to dust and dirt, no clogged filters. Reduced maintenance fees, low total cost of ownership.

Rapid Start-Up

Quick start, no need to wait for the projector to warm up.

Instant Shut-Down

Instant power down, no waiting period, convenient to move to next business meeting.

Anti-Theft Security Lock

A Kensington® security lock is built into the projector to prevent theft or any unauthorized removal of the projector

Digital Keystone (Vertical)

Allows you to adjust image setting in the most challenging presentation environments.

Super Low Fan Noise

Super low noise operation - 30 dBA (low mode)

www.vivitekcorp.com



D825MS/MX


Mobile SVGA/XGA DLP® Projector



SPECIFICATIONS

MODEL	D825MS	D825MX
DISPLAY TECHNOLOGY	0.55" 1-Chip DMD	
RESOLUTION	SVGA 800 x 600 (Total 480,000 pixels)	XGA 1024 x 768 (Total 786,432 pixels)
BRIGHTNESS	2600 ANSI Lumens	
CONTRAST RATIO	2200:1 (on/off)	
ZOOM & FOCUS	Fixed Lens & Manual Focus	Manual Zoom & Manual Focus
LENS THROW RATIO	2.0	1.9 - 2.16
PROJECTION SCREEN SIZE	24.6" - 246"	23" - 255"
COLOR WHEEL	5 Segments (R, G, B, W, Y)	
LAMP LIFE	180W (Shut Off Time: 4,000 hrs) with Eco-Mode	
ASPECT RATIO	Native (4:3) & Compatibility (16:9)	
PC COMPATIBILITY	VGA, VXGA, SVGA, XGA, SXGA, Macintosh	
VIDEO COMPATIBILITY	720p, 1080i (thru RGB), NTSC/NTSC 4.43, PAL B/G/H/I/M/N 60, SECAM	
PC INPUT TERMINALS	RGB: HD-15, Composite Video (RCA x 1), S-Video (Mini DIN) x 1, Mini-Jack x 1	
OUTPUT TERMINALS	N/A	
KEYSTONE CORRECTION	Vertical (+/- 15 degree)	
COMMUNICATION TERMINALS	USB (Service), RS-232C x 1	
FAN NOISE LEVEL	30dB (Eco-Mode), 32 dB (Standard Mode)	
AUDIO SPEAKER	1W Mono	
DIMENSIONS (W x H x D)	11 x 8.0 x 3.5 inches	
WEIGHT	5.7 lbs	
POWER SUPPLY	AC 110-240V	
POWER CONSUMPTION	Eco (200W), Standard (230W)	
REPLACEMENT LAMP	1000055-A	
WARRANTY	3-Year Parts and Labor, 1-Year lamp warranty, and *5-Year DLP® Chip	
ACCESSORIES	AC Power cord, VGA cable, Remote Control	

Screen Size and Projection Distance

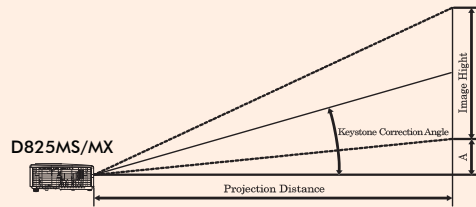


D825MS	FIX ZOOM			
Distance (feet)	4.0'	10.67'	13.32'	32.10'
Diagonal (inches)	30"	80"	100"	246"
Image Height (inches)	18"	48"	60"	147.6"
Image Width (inches)	24"	64"	80"	196.8"

D825MX	TELE				WIDE			
Distance (feet)	4.32'	11.52'	14.4'	28.79'	5.15'	10.29'	12.86'	32.8'
Diagonal (inches)	30"	80"	100"	200"	40"	80"	100"	255"
Image Height (inches)	18"	48"	60"	120"	2.4"	48"	60"	153"
Image Width (inches)	24"	64"	80"	160"	32"	64"	80"	204"

The above numbers are approximate, and may be slightly different from the actual measurements.

Input and Output Terminals

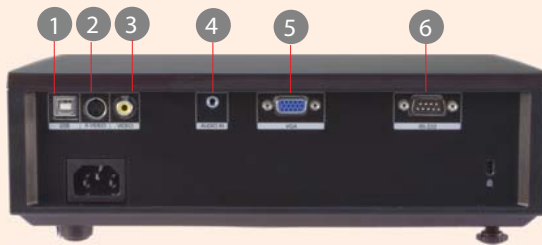

- 1 USB (Service)
- 2 S-Video
- 3 Video
- 4 Audio In
- 5 VGA
- 6 RS-232C

© 2008 Vivitek Corporation. Standard features, options and specifications subject to change without notice. Vivitek is a trademark of Vivitek Corporation. DLP logo and DLP medallion are trademarks of Texas Instruments. All other trademarks are the property of their respective holders.

VIVITEK CORPORATION

Tel: 626-369-8420

Email: info@vivitekcorp.com

www.vivitekcorp.com

*5 Year DLP® chip warranty is supported with the same process and terms/conditions as the 3-year warranty

