

XGA Short Throw Projector with Excellent Network Management Function



ViewSonic's PJD6383s multimedia DLP® short-throw projector shows images with high brightness and a defined resolution. The included Crestron RoomView® network management software facilitates processes by a centralized monitor and allows management of multiple projectors monitoring over LAN or WLAN. DynamicEco™ mode reduces power consumption and extends the projector's lifespan where Dynamic Movie mode automatically adjusts the image brightness and contrast with the changing environments, saving total cost of ownership with optimal performance. PJD6383s also comes with versatile connectivity and an HDMI interface which allow for connection with multimedia devices and increases presentation efficiency.

Outstanding projection quality

With its XGA resolution and 3,000 ANSI lumens, the PJD6383s delivers a sharp projection image and displays video contents with splendid quality.

Planet-friendly DynamicEco™ mode

ViewSonic's exclusive DynamicEco™ mode reduces power consumption of the lamp up to 70% which extends lamp life as well as the projector's lifespan. DynamicEco™ mode automatically kicks in when no signal is present or it can be manually enabled through a button on the remote. This feature also reduces fan noise and ultimately eliminates distractions. It also advances contrast ratio to 15,000:1 to tailor for professional projection performance.



DynamicEco™ Off

DynamicEco™ On

DynamicEco™

No space limitations with short throw function

With its high quality short throw zoom lens, the PJD6383s delivers a 100-inch projected image at a distance of only 1.2 meters. Such a short distance allows users to share projected contents in limited space and enjoy larger projections without interruption.

Versatile connectivity

Versatile connectivity including HDMI and RGB interfaces offer diversity and high efficiency when displaying multi-media contents to enhance presentation.

XGA Short Throw Projector with Excellent Network Management Function

Crestron RoomView® Network management


Crestron RoomView® provides an advanced, real-time alert system that sends status updates regarding power to your PC, lamp life and unit presence to simplify maintenance efforts. It also automates device scheduling, such as power on/off, and broadcast urgent messages via closed captioning. With smart network management, you'll be able to save time, save money and save maintenance effort.

Dynamic Movie mode for auto brightness and contrast detection

With Dynamic Movie mode, the projector's lamp automatically dims to strengthen and reveals fine details when displaying darker images. Dynamic Movie mode enhances image clarity, increases lamp life, reduces power consumption, and noise.

Enhanced audio quality with 10W speaker

ViewSonic's PJD6383s DLP® projector integrates a 10W speaker to provide high volume audio without the need for external speakers.

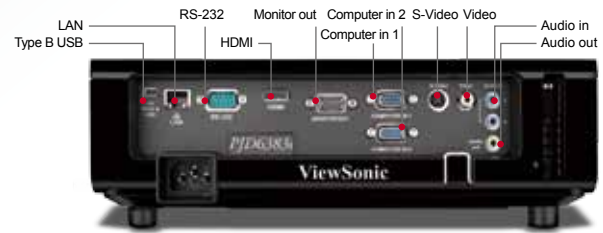

Specifications

Display Technology	Chipset	TI DMD 0.55"	
	Resolution	1024 (H) x 768 (V)	
	Optical Zoom	Fixed	
	Keystone Correction	+/- 40° (Vertical)	
	Projected Size	30" ~ 300"	
	Projected Distance	0.37 ~ 3.7 meters	
	Throw Ratio	0.61 (81" ±3% @ 1 meter)	
	Lamp	OSRAM 240W	
	Lamp Life (Normal / Eco)	3,500 / 5,000 hours (Normal / Eco)	
	Maximum Brightness	3,000 lm	
Contrast Ratio (Max.)	15,000:1 (With DynamicEco™ mode)		
Aspect Ratio	4:3		
Color Wheel	6-Seg RGBCYW		
Audio	Speaker	10W *1	
Input Signal	Computer and Image	NTSC M (3.58 MHz), 4.43MHz PAL (B, D, G, H, I, M, N, 60) SECAM (B, D, G, K, K1, L) 480i and 576i, 480p and 576p 720p, 1080i, 1080p	
	Frequency	Horizontal: 31 ~ 100 kHz Vertical: 48 ~ 120 Hz	
	Sync	Separate sync	
	Compatibility	PC	1024 x 768 @ 60 / 72 / 75 / 85 / 120Hz (Native)
		MAC	Analog (*May require a MAC adaptor) Support up to 1600 x 1200 @ 60Hz (Same as in PC)
Connectors	Input	RGB DB-15 *2 HDMI HDMI 1.3 *1 Component Shared with RGB * 2	

Connectors	Input	S-Video *1 Composite RCA-1 *1 Audio 3.5mm mini-mono jack *2	
	Output	RGB *1 Audio 3.5mm mini-mono jack *1	
	I/O	USB	Mini type B *1 (For firmware upgrade and mouse control)
		RS232	DB-9 *1
	LAN	RJ-45 *1	
Power	Voltage	100V ~ 240Vac 50 / 60Hz	
	Consumption	350W (Max.)	
Languages	English / Dutch / French / Spanish / Italian / Korean / Thai / Portuguese / T. Chinese / S. Chinese / Japanese / Russian / German / Swedish / Turkish / Finnish / Polish / Czech		
	Operating Environment	Temperature	0° ~ 40° C / 32° ~ 100° F
Environment	Humidity	10 ~ 90% (Non-condensation)	
	Altitude	0 ~ 6,000 feet	
Noise Level	Normal / Eco Mode	35dB / 31dB	
Dimension	Physical	(mm) 294 x 242 x 84 (inch) 11.57" x 9.53" x 3.31"	
	Package	(mm) 360 x 192 x 380 (inch) 14.17" x 7.56" x 14.96"	
	Weight	Net 6.6lbs / 2.99kg Gross 9.9lbs / 4.5kg	
Regulations	CB, UL, cUL, FCC (including ICES-003), CE, Argentina, NOM, GS, GOST-R, SASO, Ukraine, PSB, C-Tick, Korean-KC, CCC, CECP, WEEE, RoHS		

What's in the box?

1.8 Meter Power Cord (Black) *1, 1.8 Meter VGA Cable (Black) *1, Remote Control *1, AAA Battery *1, Quick Start Guide (Short Version) *1, ViewSonic DVD Wizard (With User Manual) *1, Lens Cap, Warranty Card & Sticker (Only For China) *1

*Specifications are subject to change without notice.