

Fully featured short throw
LCD projector with network capabilities
and a low operating cost all in a
portable design.



Key Features

- XGA 1024 x 768 resolution
- 3,200 ANSI lumens white/color output
- 3000:1 contrast ratio
- 4,000 hours hybrid filter*
- 3,000 hours lamp life (Standard mode) and 5,000 hours lamp life (Eco mode)**
- ImageCare Technology for energy savings
- Embedded LAN/Wireless Compatible
- Projector Quick Connection iOS App

Hitachi's CP-D32WN short throw LCD projector combines an array of advanced features in a compact, portable design perfectly suited for classrooms of any size. Small in size, but big on performance, the CP-D32WN provides vibrant image quality, cost-effective operation, and long-lasting reliability. The CP-D32WN incorporates a cloning function which enables you to copy configuration settings from one projector to others of the same model via USB memory. Plus, Hitachi's Intelligent Eco Mode with ImageCare combines optimal picture performance with energy savings for a lower total cost of ownership. For added peace of mind, Hitachi's CP-D32WN is also backed by a generous warranty and our world-class service and support programs.

CP-D32WN

UNIQUE FEATURES

Cloning Function



Copy configuration settings from one projector to others of the same model via USB memory. Cloning can save almost all PJ settings such as gamma and keystone via USB memory.

ImageCare Technology



ImageCare is a lamp power control function that combines optimal picture performance with maximum energy savings by decreasing energy usage, improving contrast ratio and lengthening lamp life. The result is a lower total cost of ownership and decreased maintenance cost.

Intelligent Eco and Saver Modes



Automatically changes the brightness of the lamp according to the brightness level of the screen. Also, automatically changes the brightness of the lamp if there is no change in the screen image. Using ImageCare technology, these features give optimal picture performance with maximum energy savings.

Projector Quick Connection iOS App



Our iOS application offers simple control options which include sending photo and document files and web site contents to the projector. Available for iPad® and iPhone® devices.

STANDARD FEATURES

Input Source Naming



Users can rename input sources in more descriptive terms instead of the factory default names.

Microphone Input



A microphone can be used via the jack located on the input panel. Allows for more dynamic presentations even in standby mode.

Network Control, Maintenance and Security



Embedded networking gives you the ability to manage and control multiple projectors over your LAN. Features include scheduling of events, centralized reporting, image transfer and e-mail alerts for reactive and routine maintenance.



PC-Less Presentation



By using a USB memory stick or other storage device, you can use the projector without a computer. Menus are easy to see with a thumbnail display. Additionally there is also a slideshow function.

PIN Lock / MyScreen / MyText



PIN lock protection can limit projector users. MyScreen PIN lock keeps captured images on the startup screen. Users can set any name logo to MyScreen, clearly identifying ownership. MyText provides the ability to write text on the startup screen such as model name, serial number or location.

PJMessenger



PJMessenger function allows you to send and display text messages and audio alerts on your networked projectors. It is an easy and efficient way to send announcements out to multiple units.

Present Content via LAN



Hitachi's suite of networking software allows you to easily send content directly from your PC to the projector via your LAN connection.

Template Function



Line templates in the projector menu can help when writing on a whiteboard. There are four types of line templates to choose from.

Wireless Presentation Compatible



Connect the projector to a computer or your network using the optional USB wireless adapter (part number USBWL11N). The adapter supports IEEE802.11b/g and the latest 11n.

CP-D32WN LCD Projector

HITACHI
Inspire the Next

Enhance the educational experience with Hitachi's CP-D32WN.

The CP-D32WN short throw LCD projector from Hitachi is specifically designed to enhance the educational experience – for students and teachers. Leading edge projector technology helps stimulate the imagination of students of all ages and makes lessons become more interesting, compelling and memorable. Vivid colors. Bold graphics. Crisp text.



The CP-D32WN does it all in classrooms of all sizes. With 3,200 ANSI lumens brightness and XGA 1024 x 768 resolution, the CP-D32WN provides the perfect solution. It also features a high contrast ratio, long lamp life, cloning function enabling you to copy configuration settings from one projector to others of the same model, and is wireless presentation ready. Plus, embedded networking gives you the ability to manage and control multiple projectors over your LAN (scheduling of events, centralized reporting, image transfer, and email alerts). Best of all, the high performance CP-D32WN is exceptionally reliable and offers a lower cost of ownership.



3LCD Technology



Closed Captioning



Crestron Integrated Partner



AMX Device Discovery



Hitachi Trade-Up Program



3 Year Warranty

HDMI HDMI

HI0217-06/13
All specifications subject to change without notice.
3LCD and the 3LCD logo are registered trademarks of the Seiko Epson Corporation.
iPad and iPhone are registered trademarks of Apple Inc., registered in the U.S. and other countries.
©2013 Hitachi America, Ltd. All Rights Reserved.

Hitachi America, Ltd.

900 Hitachi Way, Chula Vista, CA 91914
Toll Free: 1.800.HITACHI • Email: dmd.info@hal.hitachi.com
Web: hitachi-america.us/projectors



Front View



Top View




Back 3/4 View



Side Profile

Input/Outputs

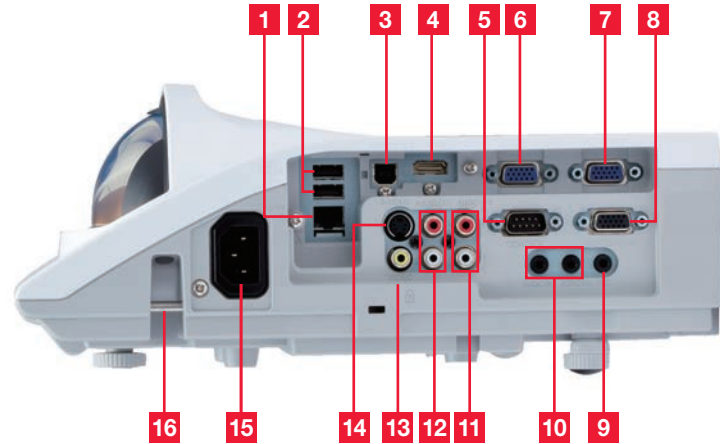

- | | | |
|----------------------|---------------------|------------------|
| 1. LAN | 7. Computer in 1 | 13. Video |
| 2. USB Type A x 2 | 8. Monitor Out | 14. S-Video |
| 3. USB Type B | 9. Microphone Input | 15. AC in |
| 4. HDMI | 10. Audio in 1, 2 | 16. Security Bar |
| 5. Control (RS-232C) | 11. Audio in 3 | |
| 6. Computer in 2 | 12. Audio Out | |

CP-D32WN





Accessories and Lenses

Supplied Accessories	Remote control, power cord, computer cable, user's manual, network manual
Optional Accessories	USBWL11N USB wireless adapter, MS-1 switcher, MS-1WL wireless switcher (switchers have limited function with this projector model)

Replacement Parts

Lamp	DT01381
Remote Control	HL02881
Filter	UX37191

Projection Throw Chart (In inches)

Screen Size 4:3		Throw Distance
Diagonal	Width	
60	48	20.1
70	56	24.0
80	64	28.0
90	72	32.0
100	80	35.9

Throw Ratio: (distance : width) 0.4 : 1

Specifications

Display	Projection Technology	3LCD, 3 chip technology
	Resolution	XGA - 1024 x 768
	White Light Output	3,200 ANSI lumens
	Color Light Output	3,200 ANSI lumens
	Colors	16.7 million colors
	Aspect Ratio	Native 4:3 / 16:9 and 16:10 compatible
	Contrast Ratio	3000 : 1 (using active IRIS)
Lens & Operation	Throw Ratio (distance : width)	0.4 : 1
	Focus Distance	20" - 36"
	Display Size	60" - 100"
	Lens	F = 2.0, f = 6.1 mm
	Lamp Wattage	215W
	Expected Lamp Life*	Approximately 3,000 hours (standard mode) 5,000 hours (Eco mode)
	Expected Filter Life**	Approximately 4,000 hours
Compatibility	Speaker Output	10W
	Acoustic Noise Level	34 dB (28 dB in Eco mode)
	Keystone	+/- 5° (vertical only)
	Computer	VGA, SVGA, XGA WXGA/WXGA+/SXGA/SXGA+/UXGA (compressed), MAC 16"
	H-Sync	31.5 kHz - 106 kHz
	V-Sync	56 Hz - 120 Hz
	Composite Video	NTSC, NTSC4.43, PAL, PAL-M, -N, SECAM
Connectors	Component Video	480i, 480p, 576i, 720p, 1080i, 1080p
	HDMI	480i, 480p, 576i, 720p, 1080i, 1080p, computer signal TMDS clock 27 MHz - 150 MHz
	Digital Input	HDMI x 1 (HDCP compliant)
	Computer Input 1	15-pin mini D-sub x 1
	Computer Input 2	15-pin mini D-sub x 1
	Computer Monitor Output	15-pin mini D-sub x 1
	Video Input	
	S-Video	Mini DIN 4-pin x 1
	Composite Video	RCA jack x 1
	Component Video	15-pin mini D-sub x 2, (shared with computer in 1/2)
	Audio Input	3.5 mm stereo mini jack x 2, RCA jack (L/R) x 1, MIC-in 3.5 mm mini jack x 1
	Audio Output	RCA jack (L/R) x 1
	Network LAN Wired	RJ-45 port (10 base-T / 100 base-TX)
Network LAN Wireless	USB-A, IEEE802.11 b/g/n - optional wireless adapter required	
USB	Type A x 2 (PC-less presentation, wireless adapter) Type B x 1 (USB display or mouse control)	
Control Terminals	9-pin mini D-sub x 1 (RS-232 control)	
Ratings & Warranty	Power Supply	AC100-120V / AC220-240V, 50/60Hz
	Power Consumption	320W
	Operating Temperature	32°F - 104°F (0°C - 40°C)
	Dimensions (W x D x H)	13.6" x 11.9" x 3.4" (excl. protruding parts)
	Weight	Approximately 8.2 lbs
	Approvals	UL 60950-1 / cUL FCC Part 15 subpart B Class B
Warranty	3 year limited parts and labor. Extended Service Contract available (additional cost)	

* Actual lamp life will vary by individual lamp and based on environmental conditions, selected operating mode, user settings and usage. Hours of average lamp life specified are not guaranteed and do not constitute part of the product or lamp warranty. Lamp brightness decreases over time.

** Actual filter life will vary by individual filter and based on environmental conditions, selected operating mode, user settings and usage. Hours of average filter life specified are not guaranteed and do not constitute part of the product warranty.

CP-D32WN

HI0217-06/13

All specifications subject to change without notice.
3LCD and the 3LCD logo are registered trademarks of the Seiko Epson Corporation.
iPad and iPhone are registered trademarks of Apple Inc., registered in the U.S. and other countries.
©2013 Hitachi America, Ltd. All Rights Reserved.

Hitachi America, Ltd.

900 Hitachi Way, Chula Vista, CA 91914
Toll Free: 1.800.HITACHI • Email: dmd.info@hal.hitachi.com
Web: hitachi-america.us/projectors

