



DESKTOP PROJECTOR™ 9260+

customize for any installation

HDTV CONNECTIVITY

compatible with HDTV video standards 480p, 720p, 1035i, 1080i

EXCEPTIONAL VIDEO

V-Scan™ video processing provides superior video performance with composite and S-video formats

AMAZING IMAGES

700:1 contrast ratio for crisp images and immaculate detail

OPTIONAL CONNECTIVITY

compatible with external ProjectionLink™ (PL-300), the single-wire connectivity solution

FIT-TO-VIEW™

digital scaling improves the clarity of any scaled image

SUPERIOR BRIGHTNESS

at 2500 ANSI lumens, shines in fully-lit conference rooms

OPTIONAL LENSES

standard lens and optional short- and long-throw lenses offer flexibility in projector installation



PROXIMA DP9260+ FEATURES

For crisp images and installation flexibility, the Proxima Desktop Projector 9260+ is the perfect solution for any demanding meeting room. With 2500 ANSI lumens of brightness, XGA resolution, optional lenses and connectivity, and a stunning 700:1 contrast ratio, the DP9260+ is a must-have for any environment.

- 2500 ANSI lumens make it ideal for bright conference rooms and offers added flexibility to cart between multiple environments
- 700:1 contrast ratio (full-on, full-off) generates stunningly clean and crisp images
- XGA (1024 x 768) resolution with Fit-to-View™ display of VGA (640 x 480) through SXGA (1280 x 1024) for compatibility with PCs and Macs
- standard motorized zoom lens with optional long- and short-throw zoom lenses offer installation flexibility in small- and medium-sized venues
- fully compatible with external ProjectionLink (PL-300)
- digital keystone correction makes it easy to project a square image regardless of projector position
- V-Scan™ video processing technology provides clean, sharp composite video and S-video images
- HDTV-ready format provides compatibility with the latest standards of today and future-ready for tomorrow
- remote control with built-in laser pointer and mouse control puts you in command of the computer and projector from anywhere in the room

WHAT'S INCLUDED

Model DP9260+ ships with:


- VGA cable, audio cable (mini-plug), PC serial cable, PS/2 and Mac control cables, AV cable, and S-video cable
- Wireless remote control with mouse control and laser pointer
- U.S. and European power cords
- Product documentation and registration card
- Lens cap

DP9260+ TECHNICAL SPECIFICATIONS

Display Technology	• 1.3 in. polysilicon TFT LCD x 3 with micro lens array
Resolution	• XGA (1024 x 768)
Resolutions Supported	• XGA (1024 x 768); Fit-to-View display of VGA (640 x 480), SVGA (800 x 600), SXGA (1280 x 1024)
Brightness	• 2500 ANSI lumens
Contrast Ratio	• 700:1 (full on, full off)
Computer Compatibility	• IBM PC, PS/2, Pentium and compatibles • SUN, SGI, IBM, HP, DEC • Apple Macintosh, Power Macintosh, and PowerBook families
Video Compatibility	• NTSC, NTSC 4.3, PAL, PAL-M, SECAM, HDTV (480p, 720p, 1080i, 1035i)
Sources	• 2 computer, 1 S-video, 1 composite video, 1 component video, audio for computer and video
H-Sync Range	• 15 to 100 kHz
V-Sync Range	• 50 to 100 Hz
Dot Clock	• 165 MHz
Horizontal Resolution	• 800 TV lines
Aspect Ratio	• std: 4:3 - wide: 16:9
Image Size Diagonal (Standard)	• 2.5 ft to 25 ft (.76 m to 7.6 m)
Projection Lens (Standard)	• Power zoom and focus lens • Focal length: 48.4 mm to 62.8 mm, F 1.8 to F 2.1
Throw Ratio (Standard Lens)	• 1.8 - 2.4:1
Projection Distance (From Screen)	• 4.6 ft to 35.4 ft (1.4 m to 10.8 m)
Keystone Correction (Optical)	• 11° fixed
Keystone Correction (Digital)	• ±30° adjustable
Number of Colors	• 16.7 million
Lamp	• 200-Watt UHP
Audio	• 2-Watt stereo
Remote Control	• Wireless IR remote with mouse control and laser pointer
RS-232 Control	• Bi-directional communication
Dimensions (W x L x H)	• 10.7 in. x 16.2 in. x 6.1 in. (27.2 cm x 41.2 cm x 15.4 cm)
Weight	• 15.2 lbs. (6.9 kg)
Power Consumption	• 300 Watts
Power Requirements	• 100 to 120V / 220 to 240V at 50/60 Hz
Operating Temperature (Sea Level)	• 41° to 95° F (5° to 35° C)
Approvals	• FCC Class A, UL, c-UL, CE
Warranty	• Two-years on parts and labor (excluding lamp) • 90-days (or 500 hours) on lamp

DP9260+ SET UP

Position the DP9260+ anywhere in the room.

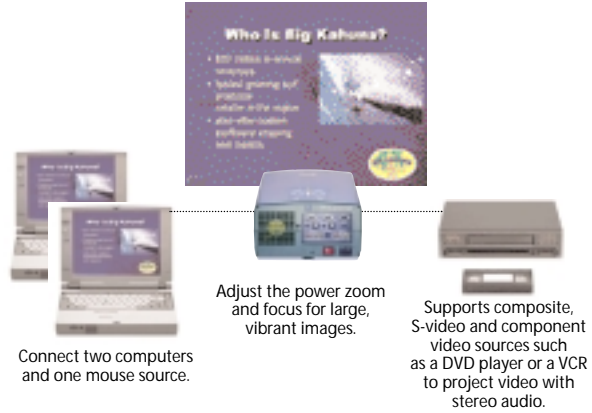

ORDERING INFORMATION

Optional Accessories

CASE-801	Samsonite Desktop and UltraLight soft rolling carrying case
CASE-013	Deluxe rolling hard case (checkable/shippable)
CASE-014	High capacity rolling hard case (checkable/shippable)
LENS-007	Short-throw zoom lens (F2.5-3.1) 1.3 - 1.8:1
LENS-008	Long-throw zoom lens (F2.0-2.9) 2.4 - 4.3:1
LAMP-016	200-Watt UHP replacement lamp
PL-300	ProjectionLink with external transmitter and receiver

DP9260+ IMAGE DIMENSION CALCULATION FACTORS

(Multiply projection distance by calculation factor for image dimension.)

Standard & Optional Lenses	Min Height	Max Height	Min Width	Max Width	Min Diag.	Max Diag.
Short-throw lens 1.3-1.8:1	0.417	0.577	0.556	0.769	0.694	0.962
Standard lens 1.8-2.4:1	0.313	0.417	0.417	0.556	0.521	0.694
Long-throw lens 2.4 - 4.3:1	0.174	0.313	0.233	0.417	0.291	0.521