

Multimedia Projector

XEED WUX6000

you can



WUXGA resolution, high brightness and top quality optics make this the no-compromise installation projector.

Achieve genuinely breathtaking images with Canon's flagship installation projector. It features native WUXGA resolution, 6000 lumens colour brightness, and a choice of five high-quality optional lenses.

WUXGA
RESOLUTION

LCOS
TECHNOLOGY

6000 LUMENS

2000:1
CONTRAST RATIO

BUILT-IN EDGE
BLENDING

HDMI™ AND DVI
TERMINALS

CLASS-LEADING
ENERGY
EFFICIENCY, WITH
DEDICATED ECO
BUTTON

Key features

- Achieve detailed, ultra-realistic images with native WUXGA resolution
- Deliver outstanding brightness with 6000 lumens and a 2000:1 contrast ratio
- Create vivid images with accurate colours, using LCOS panel technology
- Choose from five high-quality interchangeable Canon projection lenses
- Powered lens shift, zoom and focus for fast and accurate installation
- Project picture-by-picture from two digital sources
- New advanced image processor includes features like hardware edge blending, picture-by-picture and four corner keystone correction
- Easy access to the lamp and air filter helps keep maintenance costs down

What's in the box

XEED WUX6000 Multimedia Projector, Remote Controller, AAA Batteries, AC Mains Power Cable, Computer Connection Cable, Instruction Manual on CD-ROM, Important Information and Quick Start Guide, European Warranty Document

Dimensions (W x H x D)

380 mm x 170 mm x 430 mm

Weight

8.5 kg

Projectisle.com.au

Where Projectors Roam Free

Canon

XEED WUX6000

Specifications



MULTIMEDIA PROJECTOR Product Class	Installation
PANEL Type Size and Number Aspect Ratio Native Resolution	LCOS reflective display, TFT Active Matrix 0.71" diagonal, 3 panels 16:10 1920 x 1200 (WUXGA), 2304000 pixels
OPTICS Lamp Type Lens F Number and Focal Length Zoom Magnification and Control Focus Control Lens Shift	340W NSHA F1.89 - F2.65; f=23.0 - 34.5mm (Lens RS-IL01ST) 1.5x Motorised Motorised Vertical: -15% to +55%, Motorised Horizontal: +/-10%, Motorised
IMAGE AND AUDIO Brightness Brightness Uniformity Contrast Ratio Projection Distance Coverage Screen Size Projection Ratio Digital Zoom Magnification Keystone Correction Range Digital RGB Compatibility Analogue RGB Compatibility Digital Video Scan Systems Component Video Scan Systems Video / S-Video Colour Systems Image Enhancement Built-in Speaker	6000 lumens (4660 lumens in Eco Mode) 88% 2000:1 (full on / full off) 1.3m - 29.0m (3.2m - 4.8m for 100" image, Lens RS-IL01ST) 40" - 600" (86 x 54cm - 1292 x 808cm) 1.49:1 - 2.24:1 1x - 12x Vertical: +/-20° Horizontal: +/-20° WUXGA / UXGA / WSXGA+ / SXGA+ / WXGA+ / FWXGA / WXGA / SXGA / XGA / SVGA / VGA WUXGA / UXGA / WSXGA+ / SXGA+ / WXGA+ / FWXGA / WXGA / SXGA / XGA / SVGA / VGA 1080p / 1080i / 720p / 576p / 480p 1080p / 1080i / 720p / 576p / 576i / 480p / 480i PAL / PAL-M / PAL-N / NTSC / NTSC4.43 / SECAM 12-bit Digital Gamma Correction 5W RMS, Monaural

PORTS AND CONNECTORS Digital RGB / Analogue RGB Input 1 Digital Video and Audio Input Analogue RGB Input 2 Audio Input 1 AUDIO INPUT 2 Audio Output USB Port Service Port / Projector Control Network Port Wired Remote Control	DVI-I 29-pin HDMI V1.3 (with Deep Colour) Mini D-Sub 15-pin (Component via optional adaptor cable) 3.5mm stereo mini-jack 3.5mm stereo mini-jack 3.5mm stereo mini-jack (variable level) USB Type A Mini D-Sub 9-pin RJ-45 (1000BASE-T / 100BASE-TX / 10BASE-T) 3.5mm stereo mini-jack
MECHANISMS Front Elevation Mechanism	Two rotary feet, 6° maximum image elevation
RATINGS Dimensions (W x H x D) Weight Power Source Power Consumption Noise Level Operating Environment Storage Environment Warranty	380 mm x 170 mm x 430 mm 8.5 kg (without lens) 100V - 240V AC, 50/60Hz Normal Mode: 455W / Eco Mode: 360W / Standby: 0.7W / Standby (LAN off): 0.3W Normal Mode: 40dBA / Eco Mode: 36dBA 0°C to +40°C -10°C to +60°C 3 years
All data is based on Canon standard testing methods except where indicated Subject to change without notice.	

Connectivity



- 1 **DVI-I:** Digital PC / Analog PC
- 2 **HDMI:** HDMI (with audio, supporting Deep colour)
- 3 **Mini D-Sub:** Analog PC / Component video
- 4 **Mini-jack:** Stereo audio
- 5 **Mini-jack:** Stereo audio
- 6 **Mini-jack:** Stereo audio
- 7 **USB Type A:** USB connection
- 8 **RJ-45:** 100BASE-T/100BASE-TX/10BASE-T
- 9 **DSub9:** RS-232C connection
- 10 **Mini-jack:** Wired remote control connection



Canon Inc
canon.com

Canon Europe
canon-europe.com

English Edition
© Canon Europa N.V., 2014

Canon Europe Ltd
3 The Square, Stockley Park
Uxbridge, Middlesex
UB11 1ET UK

Multimedia Projector

XEED WUX6000

you can



WUXGA resolution, high brightness and top quality optics make this the no-compromise installation projector.

The whole range consists of:

XEED: WUX6000, WUX6000 Medical, WUX5000, WUX5000 Medical, WX6000, WX6000 Medical, SX6000, SX6000 Medical, WUX450, WUX450 Medical, WUX400ST, WUX400ST Medical, WX520, WX520 Medical, WX450ST, WX450ST Medical.

LV: LV-8235UST, LV-7490, LV-S300, LV-WX300, LV-WX300ST, LV-X300, LV-X300ST.

Box Dimensions (W x H x D)

380 mm x 170 mm x 430 mm

Box Weight (Gross / Net)

12 kg / 8.5 kg

Packet style

Pallet

Quantity of item

Logistical = 1
Financial = 1

MERCURY CODES

PRODUCT

Name	Mercury Code	EAN Code
Multimedia Projector XEED WUX6000 (E)	9726B003AA	4549292014648
Multimedia Projector XEED WUX6000 (GB)	9726B007AA	8714574623337
Multimedia Projector XEED WUX6000 Medical (E)	9726B005AA	8714574623269
Multimedia Projector XEED WUX6000 Medical (GB)	9726B006AA	8714574623276


OPTIONS

Lamp Assembly RS-LP09	9963B001AA	4549292020885
Ceiling Attachment RS-CL11	4969B001AA	4960999685403
Ceiling Pipe 400-600mm RS-CL08	3096B001AA	4960999614144
Ceiling Pipe 600-1000mm RS-CL09	3097B001AA	4960999614151
Top Cover (Dark Grey) RS-TC01	5471B001AA	4960999789620
Replacement Air Filter RS-FL01	4971B001AA	4960999685427
Remote Controller RS-RC04	4970B001AA	4960999685410
Remote Controller RS-RC05 (To be used as wired remote controller)	5750B001AA	4960999810393
Standard Zoom Lens RS-IL01ST	4966B001AA	4960999685373
Long Zoom Lens RS-IL02LZ	4967B001AA	4960999685380
Short Fixed Lens RS-IL03WF	4968B001AA	4960999685397
Ultra Long Lens RS-IL04	6064B001AA	4960999840123
Wide Zoom Lens RS-IL05WZ	8168B001AA	496099971315

Projection distance using different project lenses (meters)

Projection lens	100 type image size	200 type image size	300 type image size	400 type image size	500 type image size	600 type image size
RS-IL03WF	1.73	86	5.17			
RS-IL05WZ	2.2 - 3.2	4.3 - 6.5	6.5 - 9.7	8.6 - 13.0	10.8 - 16.3	12.9 - 19.5
RS-IL01ST	3.2 - 4.8	6.4 - 9.6	9.6 - 14.5	12.9 - 19.3	16.1 - 24.1	19.3 - 29.0
RS-IL02LZ	4.7 - 8.0	9.5 - 16.1	14.2 - 24.2	19.0 - 32.3	23.8 - 40.4	28.5 - 48.5
RS-IL04UL	7.6 - 14.9	15.2 - 29.8	22.7 - 44.6	30.2 - 59.4	37.7 - 74.2	45.2 - 89.0

www.canon.com/lcd-sim

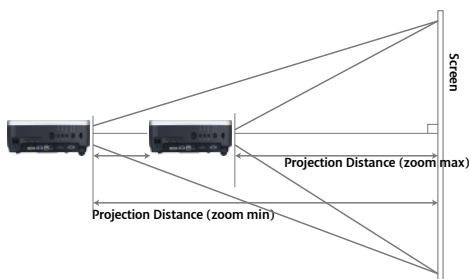

Projectisle.com.au

Where Projectors Roam Free

Canon