

CP-EW250N

Technical Specifications

HITACHI
Inspire the Next

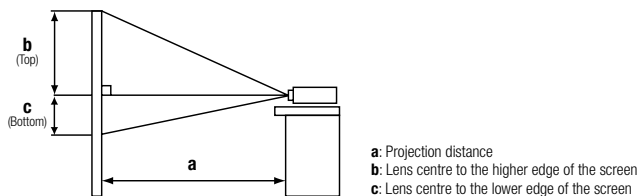
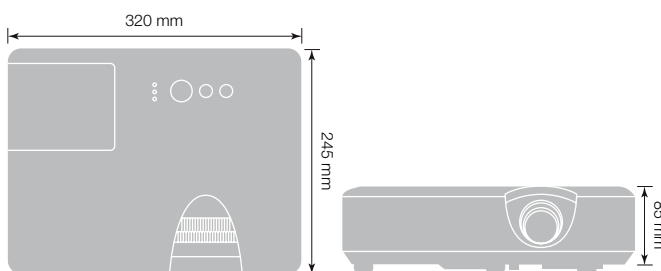
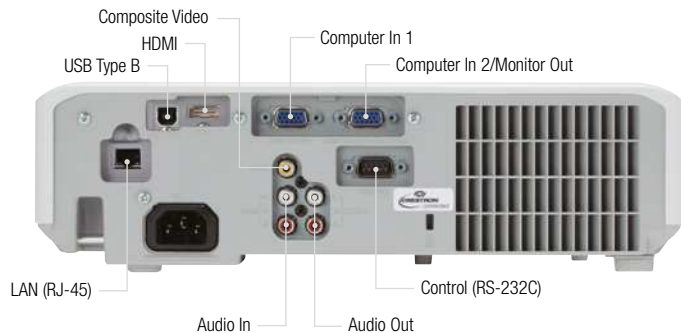


Image size 16:10 (from projector's end)				
Screen size (diagonal)	Projection distance (a)		Screen height (cm)	
	Wide (m)	Tele (m)	b (top)	c (bottom)
30" (0.8m)	0.9	1.1	38	3
40" (1.0m)	1.2	1.5	50	4
50" (1.3m)	1.6	1.9	63	5
60" (1.5m)	1.9	2.3	75	6
100" (2.5m)	3.2	3.8	125	10
200" (5.1m)	6.4	7.7	250	19
300" (7.6m)	9.6	11.5	375	29

Image size 4:3 (from projector's end)				
Screen size (diagonal)	Projection distance (a)		Screen height (cm)	
	Wide (m)	Tele (m)	b (top)	c (bottom)
30" (0.8m)	1.0	1.3	42	3
40" (1.0m)	1.4	1.7	57	4
50" (1.3m)	1.8	2.1	71	5
60" (1.5m)	2.1	2.6	85	7
100" (2.5m)	3.6	4.3	142	11
200" (5.1m)	7.2	8.7	283	22
300" (7.6m)	10.9	13.1	425	33

OPTICAL

LCD Panel	0.59" (1.5cm) P-Si TFT x 3
Resolution	WXGA (1280 x 800)
White light output (brightness)	2500 ANSI Lumens (Normal Mode)/2000 ANSI Lumens (Eco Mode)
Colour light output (colour brightness)	2500 ANSI Lumens (Normal Mode)/2000 ANSI Lumens (Eco Mode)
Contrast ratio	2000:1
Lens	Manual focus, Manual zoom x 1.2
Lamp wattage	225W UHP
Lamp life	5000 hours (Normal Mode)/6000 hours (Eco Mode)
Diagonal display size	30"~300" (76cm~762cm)
Number of colours	8 Bit/colour, 16.7M colours
Keystone	13:1 upward shift, fixed
Focus distance	0.9m~9.6 m (Wide), 1.1m~11.5 m (Tele)
Distance to width ratio	1.5 (Wide), 1.8 (Tele)

COMPATIBILITY

Computer compatibility	IBM Compatible VGA, SVGA, XGA, WXGA, WXGA+, SXGA, SXGA+, UXGA (compressed), MAC 16"
Composite/S-Video	NTSC, PAL, SECAM, PAL-M, PAL-N, NTSC4.43
Component Video	525i(480i), 525p(480p), 625i(576i), 1125i(1080i@50/60), 1125p(1080p@50/60), 750p(720p@50/60)
HDMI Video	525i(480i), 525p(480p), 625i(576i), 1125i(1080i@50/60), 750p(720p@50/60), 1125p(1080p@50/60)
Plug & Play	DDC2B

FEATURES

Speakers	16W x 1 (mono)
Basic functions	Freeze, Magnifying, Blank, Auto signal search, Auto eco mode
Picture adjustments	Aspect selection (video, data, HDMI), Equalizing digital gamma correction, Equalizing colour temperature adjustment, 2-3 pull down for NTSC, Mirror reverse image, Up-side down image, Progressive scan, Noise reduction, Overscan
Digital keystone correction	Vertical $\pm 30^\circ$ (XGA@60Hz)
Advanced features	MyScreen, My Memory, My Button (by remote control), My Text, My Source, Picture modes (normal, cinema, dynamic, blackboard, whiteboard, greenboard, daytime, photo), Source naming (English), Resolution setting, Filter timer, Stand-by Audio, Template, Closed Caption (for NTSC & component 480i only), Framelock, Eco Mode (normal, eco, intelligent eco, saver), ImageCare™
Outward	Easy lamp replace from top, Easy access air filter
Power on & off	Direct on, Auto off
Security systems	Security bar, PIN-lock, MyScreen password, Key lock (key pad and remote control), Kensington slot, My Text password
Network	AMX Device Discovery, Command control via the network, Configuring and controlling the projector via a web browser, Controlling the projector via scheduling, Crestron RoomView®, Failure and warning alerts via email, Network Bridge, PLink™
OSD languages	English, French, German, Spanish, Italian, Norwegian, Dutch, Japanese, Portuguese, Simplified Chinese, Traditional Chinese, Korean, Swedish, Russian, Finnish, Polish, Turkish, Arabic, Persian, Czech, Danish, Hungarian, Romanian, Slovenian, Croatian, Greek, Lithuanian, Estonian, Latvian, Thai, Portuguese (Brazil), Indonesian, Vietnamese

CONNECTIONS

Digital input	1 x HDMI (HDCP compatible)
Computer input	2 x 15-pin Mini D-sub
Monitor output	1 x 15-pin Mini D-sub
Video input	1 x 15-pin Mini D-sub 1 x RCA for composite
Audio input	1 x pair RCA (L/R)
Audio output	1 x pair RCA (L/R)
Control	1 x 9-pin D-sub for RS-232C control
USB	1 x USB Type B (for mouse control)
Network	1 x RJ-45

POWER

Power supply	AC 90~132V/AC 198~264V (50/ 60 Hz)
Power Consumption/Standby	310W/<0.5W (AC 220-240V)

PHYSICAL

Dimensions (W x H x D)	320 x 85 x 245mm (excluding feet and extrusions)
Weight	3.1Kg
Noise level	30dB (Eco Mode)/38dB (Normal Mode)
Air filter	Urethane (Up to 2000 hours)

MISCELLANEOUS

Indicator lights (lamp, temp, power), Ceiling mount image, Rear projection image, Serial number label on front, MAC address displayed on the side of projector

CERTIFICATION

UL60950-1/cUL, FCC Part 15 subpart B class B, CE Marking: EN61000-3-2, EN61000-3-3, EN55022 (class B), EN55024 (EMC directive), EN60950-1 (Low voltage directive), WEEE, RoHS, ErP (lot6) compliant, c-tick class B

ACCESSORIES SUPPLIED

Remote control with batteries (HL02881), Computer cable, Power cord, User manual (detail & concise)

OPTIONAL ACCESSORIES

Replacement lamp	DT01491
------------------	---------

WARRANTY



ProSelecta

View :: Compare :: Select - www.ProSelecta.com