

Multimedia Projector

LV-WX300ST

you can



Compact, portable WXGA projector with a projection ratio of less than 0.5:1 – delivering bigger images from a shorter distance.

Project vivid widescreen images from a short distance with the LV-WX300ST. This compact short throw projector offers native WXGA resolution, HDMI input and easy setup, making it a superbly flexible performer.

Key features

- Deliver clear widescreen images with native WXGA resolution (1280 x 800 pixels)
- Enjoy a vivid 3000 lumens brightness and 2300:1 contrast ratio
- Display bigger images from a shorter throw distance with the 0.49:1 projection ratio
- 1.0x fixed high-quality short throw projection lens
- Compact and lightweight: just 2.8kg
- Vertical: - 18° /+ 12°
- 4000h lamp life (6000h in Eco Mode)
- HDMI™ port and 2 x VGA ports
- RJ-45 network port for remote control and monitoring
- Built-in 10W speaker

What's in the box

Multimedia Projector LV-WX300ST, Remote Control, AC Mains Power Cable, Computer (VGA) Cable, Quick Start Guide (Book), User's Manual (Multi, CD-ROM), Warranty book (E)

Dimensions (W x H x D)

282 mm x 118 mm x 268 mm

Weight

2.8 kg



Canon

LV-WX300ST


Specifications



| | |
|---|---|
| MULTIMEDIA PROJECTOR Product Class | Ultra-Portable |
| LCD PANEL Type Size and Number Aspect Ratio Native Resolution | Reflective DLP™ chip 0.65" diagonal, Single chip 16:10 1280 x 800 (WXGA), 1024000 pixels |
| OPTICS Lamp Type Lens F Number and Focal Length Zoom Magnification and Control Focus Control Lens Shift | 210W P-VIP F2.60; f=6.9mm 1.0x Fixed Manual 55% (fixed) |
| IMAGE AND AUDIO Brightness Brightness Uniformity Contrast Ratio Projection Distance Coverage Screen Size Projection Ratio Digital Zoom Magnification Keystone Correction Range Digital RGB Compatibility Analogue RGB Compatibility Digital Video Scan Systems Component Video Scan Systems Video / S-Video Colour Systems Display Modes Built-in Speaker | 3000 lumens (2200 Lumens Eco mode) 70% 2300:1 (with lamp control) 0.74m - 1.26m (1.05m for 100" image) 70" - 120" (151 x 94cm - 258 x 162cm) 0.49:1 2x maximum Vertical: Manual -18° / +12° (UXGA / SXGA+ / WXGA+ / FWXGA) / WXGA / SXGA / XGA / SVGA / VGA (UXGA / SXGA+ / WXGA+ / FWXGA) / WXGA / SXGA / XGA / SVGA / VGA / MAC 1080p / 1080i / 720p / 576p / 480p 1080p / 1080i / 720p / 576p / 480p / 480i PAL / PAL-M / PAL-N / PAL-60 / NTSC / NTSC4.43 / SECAM Presentation, Standard, sRGB, Movie, User 1 & 2 10W RMS, Monaural |

| | |
|---|--|
| PORT AND CONNECTORS Digital RGB / Digital Video Input Analogue RGB Input 1 Analogue RGB Input 2 S-Video Input Composite Video Input Audio Input Audio Output Projector Control Network Port Service Port | HDMI™ V1.3 Mini D-Sub 15-pin (Component Video via optional cable) Mini D-Sub 15-pin (Component Video via optional cable) Mini DIN 4-pin RCA x1 3.5mm stereo mini-jack 3.5mm stereo mini-jack (variable level) Mini D-Sub 9-pin (RS-232C) RJ-45 (100BASE-TX / 10BASE-T) USB Type B |
| MECHANISMS Front Elevation Mechanism Rear Adjustment Mechanism | 1x Mechanical foot, 6° maximum image elevation 1x Mechanical foot |
| RATINGS Dimensions (W x H x D) Weight Power Source Power Consumption Noise Level Operating Environment Warranty | 282 mm x 118 mm x 268 mm (including protrusions) 2.8 kg 100V - 240V AC, 50/60Hz Normal Mode: 330W / Eco Mode: 270W / Standby: 3W, Standby (LAN off): 0.5W Normal Mode: 36dBA / Eco Mode: 29dBA 0°C to +40°C 3 years |
| All data is based on Canon standard testing methods except where indicated. Subject to change without notice. ™ and ®: All company and/or product names are trademarks and/or registered trademarks of their respective manufacturers in their markets and/or countries. | |

Connectivity

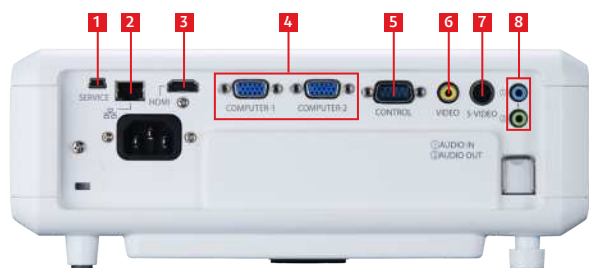

- 1** USB type B: Service port
- 2** RJ-45: Network connection (100BASE-TX / 10BASE-T)
- 3** HDMI: HDMI input
- 4** Mini Dsub 15 x2: Analog PC input / Component video input
- 5** Dsub9: RS232C connection
- 6** RCA: Video input
- 7** Mini DIN4: S-video input
- 8** Mini jack x2: Audio input x1, Audio output x1



Multimedia Projector

LV-WX300ST

you can



Compact, portable WXGA projector with a projection ratio of less than 0.5:1 – delivering bigger images from a shorter distance.

The whole range consists of:

XEED: WUX5000, WUX5000 Medical, WUX4000, WUX4000 Medical, WX6000, WX6000 Medical, SX6000, SX6000 Medical, WUX450, WUX450 Medical, WUX400ST, WUX400ST Medical, WX520, WX520 Medical, WX450ST, WX450ST Medical.

LV: LV-S300, LV-WX300, LV-WX300ST, LV-X300, LV-X300ST, LV-8235UST, LV-7490.

Box Dimensions (W x H x D)

185 mm x 345 mm x 377 mm

Box Weight (Gross / Net)

Approx. 3.7 kg

Packet style

Pallet

Quantity of item

Logistical = 1
Financial = 1


MERCURY CODES

PRODUCT

| Name | Mercury Code | EAN Code |
|--------------------------------------|--------------|---------------|
| Multimedia Projector LV-WX300ST (E) | 9880B003AA | 4549292021608 |
| Multimedia Projector LV-WX300ST (GB) | 9880B005AA | 8714574624969 |

OPTIONS

| | | |
|----------------------------|------------|---------------|
| Remote Controller LV-RC08 | 0029C001AA | 4549292024203 |
| Soft Carrying Case LV-SC01 | 5331B001AA | 4960999787930 |
| Projector Lamp LV-LP40 | 0120C001AA | 4549292026658 |

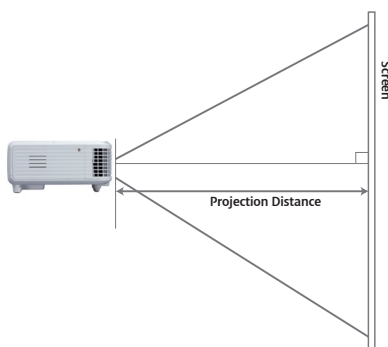

THROW DISTANCES (16:10 aspect ratio)

| Image size (16:10) | Diagonal [type] | 60 | 70 | 80 | 90 | 100 | 110 | 120 |
|---------------------|-----------------|-----|------|------|------|------|------|------|
| | Width [m] | 1.3 | 1.5 | 1.7 | 1.9 | 2.2 | 2.4 | 2.6 |
| | Height [m] | 0.8 | 0.9 | 1.1 | 1.2 | 1.3 | 1.5 | 1.6 |
| Projection distance | L [m] | — | 0.74 | 0.84 | 0.95 | 1.05 | 1.16 | 1.26 |

www.canon.com/lcd-sim



PROJECTOR

Canon