

MULTIMEDIA PROJECTOR

EMP-720 & EMP-730 PROJECTORS



XGA SUPER BRIGHT, MICRO-LIGHT PROJECTOR FOR THE MOBILE PRESENTER

- Super bright 2000 (EMP-730) / 1500 (EMP-720) ANSI Lumens
- Micro-light at just 1.9kg
- Automatic Keystone Correction

EMP-720 & EMP-730 PROJECTORS

EPSON®

EPSON EMP-720 XGA Projector



EPSON EMP-730 XGA Projector



SYDNEY

70 Gibbes Street
Chatswood NSW 2067
Tel: (02) 9903 9000
Fax: (02) 9903 9177

MELBOURNE

Level 1
6 Riverside Quay
Southbank VIC 3006
Tel: (03) 9685 6555
Fax: (03) 9686 1016

BRISBANE

Level 3, Waterfront Place
1 Eagle Street
Brisbane QLD 4000
Tel: (07) 3360 0219
Fax: (07) 3360 0289

PERTH

Suite 20, Level 3
1060 Hay Street
West Perth WA 6005
Tel: (08) 9480 0418
Fax: (08) 9480 0443

ADELAIDE

Level 1, Carrington House
61-63 Carrington Street
Adelaide SA 5000
Tel: (08) 8237 0518
Fax: (08) 8237 0519

AUCKLAND

245 Hobson Street
Auckland NZ
Tel: (09) 366 6855
Fax: (09) 366 6865

WELLINGTON

Level 6, City Tower
95 Custom House Quay
Wellington NZ
Tel: (04) 473 3494
Fax: (04) 473 4631

ABN 91 002 625 783
05/02

Visit our website:

www.epson.com.au
www.epson.co.nz


Specifications

PROJECTION SYSTEM	RGB Liquid Crystal Shutter Projection System	
PROJECTION METHOD	Front / Rear / Ceiling Mount	
SPECIFICATION OF MAIN PARTS		
LCD	Size	EMP-730 0.9inches with MLA (x3) EMP-720 0.9inches without MLA (x3)
	Driving method	Poly-Silicon TFT active matrix
	Pixel number	786,432 (1024 x 768) x 3
	Native resolution	XGA
	Aspect ratio	4:3
	Pixel arrangement	Stripe
PROJECTION	Type	Manual: zoom / focus
	f-number	1.9 to 2.1 (+/- 3%)
	f-number	31 to 36 (+/- 3%)
	Zoom ratio	1:1.16
	Lens cover	attached
LAMP	Type	150 W UHE
OPTICAL SYSTEM	Dichroic Mirror Separation & Prism combine method	
SCREEN SIZE (PROJECTED DISTANCE)	30 to 300inch (1.0 to 11.7m)	
KEYSTONE CORRECTION RATIO	9:1	
BRIGHTNESS	2000 ANSI lumens (EMP-730)	
	1500 ANSI lumens (EMP-720)	
CONTRAST	400:1	
BRIGHTNESS UNIFORMITY	85% (TYP)	
COLOUR REPRODUCTIVITY	Full colour (16.7 million colours)	
SOUND OUTPUT	1W	
EFFECTIVE SCANNING FREQUENCY RANGE		
PIXEL CLOCK	13.5MHz to 162MHz	
HORIZONTAL	(15 - 92) KHz	
VERTICAL	(50 - 85) Hz	
ADJUSTMENT FUNCTION		
PROJECTOR / REMOTE CONTROL	Keystone (Vertical) / Brightness / Contrast / Tint / Saturation / Sound / Input signal etc.	
KEYSTONE CORRECTION	Vertical -15 to +15 degrees	
TILT ANGLE	0 to 11 degrees	
ANALOGUE RGB / YUV I/O		
DISPLAY PERFORMANCE	Native	1024 x 768 dots
	Resize	1600 x 1200 / 1280 x 1024 / 800 x 600 / 640 x 480 dots
INPUT SIGNAL	Signal type	Separate signal
	Video signal	Analogue (0.7Vp-p, 75 Ω / Mac0.714Vp-p, 75 Ω)
	Sync. signal	Separate (positive & negative, bi-polarity 1-5Vp-p) / Composite (positive & negative, bi-polarity 1-5Vp-p) / Sync-on-green (negative 0.3Vp-p)
	Audio signal	500m Vrms / 47 KΩ
INPUT TERMINAL	Video	Mini D-sub 15 pin x 1
	Audio	Stereo mini jack
VIDEO I/O		
DISPLAY PERFORMANCE	NTSC: 550 LINE PAL: 550 LINE (Depend on observation of the multi burst pattern)	

INPUT SIGNAL	Video standard	NTSC / NTSC4.43 / PAL / M-PAL N-PAL / PAL60 / SECAM
	Video signal	Composite video (1.0Vp-p / Sync. Negative, 75Ω) / S-Video (Luminous 0.714Vp-p, chrominous 0.286Vp-p, 75Ω) / Component video (Analogue Y level 0.7V 75Ω / CR CB level +/- 0.35V 75Ω / Sync. Negative 0.3V or 3-state +/- 0.3V on Y) Video-RGB 0.7Vp-p, 75Ω / MAC 0.714Vp-p, 75Ω
INPUT TERMINAL	Audio signal	500m Vrms / 47 KΩ
	Video	Composite Video: RCA x 1 / S-Video: Mini DIN / Component Video: Mini D-sub 15pin (in common with Analogue RGB connector) / Video-RGB: Mini D-sub 15pin (in common with Analogue RGB connector)
	Audio	Stereo mini jack (in common with Analogue RGB audio jack)

CONTROL I/O	
I/O TERMINAL	USB connector series B x1 (for mouse, K/B, control)
OPERATING TEMPERATURE	5°C to 35°C (41°F to 95°F)
POWER SUPPLY VOLTAGE	100 - 120V / 200 - 240V ±10%, 50/60Hz AC
DIMENSION	
EXCLUDE PROJECTION LENS & FEET	190(D) x 276(W) x 70(H)mm
MAXIMUM DIMENSION	190(D) x 276(W) x 78.5(H)mm
WEIGHT	Approx. 4.3lbs / 1.9Kg
FAN NOISE	39dB
ACCESSORIES	
	Power cable (1.8m), Computer cable (1.8m, Mini D-sub 15pin (Male) - Mini D-sub 15pin (Male)), Video cable (RCA Yellow), Mouse cable (USB Mouse cable), Remote Control, Soft Carrying Bag, User's manual

*Specifications are subject to change without notice due to technological improvements.

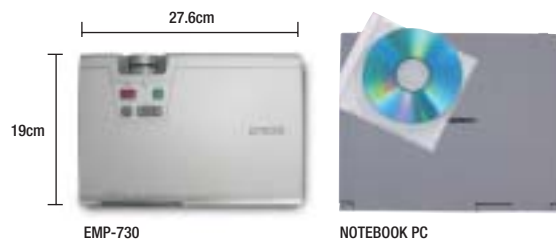

As an International ENERGY STAR Partner, EPSON has determined that this product meets the International ENERGY STAR guidelines for energy efficiency. EPSON is the registered trademark of SEIKO EPSON Corporation. EPSON STYLUS, PerfectPicture, MicroPiezo, AcuPhoto Halftoning, QuickDry are the trademarks of SEIKO EPSON Corporation. All other names and company names used herein are for identification purpose only and may be the trademarks or registered trademarks of their respective owners. EPSON disclaims any and all rights in those marks. All print samples shown herein are simulations. Specifications are subject to change without notice.