

EP737 Digital DLP™ Projector

Ultra Quiet, Ultra Portable

Optoma's market leading experience and the latest Texas Instruments DDR Digital Light Processing (DLP™) technology enables the EP737 to deliver explosive presentations at work.

Projecting a powerful 1500 ANSI lumens image, and a remarkable 1800:1 contrast ratio, the EP737 ensures an image with excellent clarity of detail.

The EP737 is one of the quietest projectors you can buy, at just 32dB. So small and lightweight, it fits easily into a briefcase.

Our Award Winning Home Cinema expertise ensures the EP737 excels at video - providing an outstanding movie experience at home.



Powered with DLP™ technology by Texas Instruments, our projectors give you crystal clear images with sharper quality



Digital Image Processing

Intelligent image optimisation provided by industry leading Pixelworks technology



Input Signal Memory

Each input signal type has its own memory enabling perfect fine tuning and matching of all sources

Dual Mode

Equally at home displaying stunning Widescreen (16:9) or Standard (4:3) aspect ratio material for viewing images from; Computers, PDAs, DVD players, TV or games consoles

Specifications


Display	(DLP™) Technology by Texas Instruments
Computer Compatibility	XGA 1024 x 768 Native, SXGA Compatible
Video Compatibility	PAL, SECAM, NTSC, EDTV, HDTV (480p, 720p 1080P)
Brightness (max ANSI Lumens)	1,500 ANSI Lumens
Contrast (full on - full off)	1800:1
Aspect Ratio	4:3 & 16:9
Audible Noise	32db
Number of Colours	16.7 Million Colours
Projection Lens	F/2.44~2.69, F= 28.8~34.5mm
Projection Screen Size	20-272" Diagonal
Throw Distance	1.25m-12m
Throw Ratio	2.17-2.94 (projection distance/image width)
Horizontal Scan Rate	31~97KHz
Vertical Refresh Rate	43~120Hz
Lamp Type	150W user replaceable P-VIP Lamp
Lamp Life	2000 hours
Keystone Correction	Digital, +/-16 degrees
Audio	One Internal speaker with 2 Watt Output
Weight	~1.5kg
Dimension	246 x 210 x 71 ± 1mm
Remote Mouse Control	Remote Mouse Control with mouse function and laser pointer
Power Supply	AC input 100~240V auto-switching power supply
Power Consumption	220W (max)
Operation Temperature	10°C~ 40°C / 50F~104F
Uniformity (Typical)	90%
Warranty	Two (2) Years Limited Warranty, Parts and Labour
Standard Accessories	AC Power Cord, VESA M1-A to VGA and USB Cable, One Mini DIN 4 pin S-Video Cable, 3.5mm Phone Jack to RCA pin Composite Video Cable, SCART Adapter (Composite, 2 x Audio) 3.5mm Phone Jack to 3.5mm Phone Jack Audio Cable, Wireless Remote Control with USB Mouse function and Laser Pointer, Battery x 2, Multilingual User's Guide (CD-ROM), Multilingual Quick Start Cards, Remote Control Driver (CD-ROM), Soft Carrying Bag, Lens Cover.
Optional Accessories	Ceiling Mount Kit

Light Engine

Texas Instruments, DLP™, 12", Double Data Rate, Digital Mirror Device -



The most advanced XGA DLP™ chip currently available. The 12" tilt combined with 'Dark Metal' technology enables the 1800:1 contrast ratio. Double Data Rate processing ensures exceptional image quality.

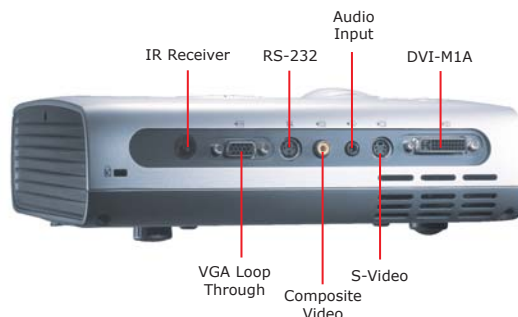

EP737 Projection Distance/Image Size

ALL DISTANCES IN METRES				
Projection Distance	Min. Diagonal Image Size	Max. Diagonal Image Size	Min. Horizontal Image Size	Max. Horizontal Image Size
1.25	0.53	0.72	0.43	0.58
2.00	0.85	1.15	0.68	0.92
3.00	1.28	1.73	1.02	1.38
4.00	1.70	2.30	1.36	1.84
5.00	2.13	2.88	1.70	2.30
6.00	2.55	3.46	2.04	2.76
7.00	2.98	4.03	2.38	3.23
8.00	3.40	4.61	2.72	3.69
9.00	3.83	5.18	3.06	4.15
10.00	4.25	5.76	3.40	4.61
11.00	4.68	6.34	3.74	5.07
12.00	5.10	6.91	4.08	5.53



AUSTRALIAN DISTRIBUTOR
AMBER TECHNOLOGY LTD
 ABN 86 003 231 187
 Phone: 1800 251 367
 www.ambertech.com.au
 display@ambertech.com.au

NEW ZEALAND DISTRIBUTOR
AMBER TECHNOLOGY (NZ) LTD
 Unit 3 77 Porana Road
 Glenfield Auckland
 Phone: 09 443 0753
 www.amber.co.nz
 sales@amber.co.nz



www.optoma.com.au



www.optoma.com.au

Due to a process of continuous improvements, specifications are subject to change without notice. Optoma is a registered trademark of Optoma Corporation. All other product names and company names used herein are for identifications purposes only and may be trademarks or registered trademarks of their respective owners. Errors and omissions excepted, all specifications are subject to change without notice.