

# W1090



\*Brilliant Color with 6X RGBRGB C/W

\*CinemaMaster Audio with 10W Speaker

\*Native 1080p Full-HD Image quality

\*Enjoy 100" big Screen in only 2.5m

\*Optional Wireless Accessory (WDP02)




Model Name		W1090 Home Projector	
Technology			
Projection System		DLP	
DMD type		DC3	
Image			
Native Resolution		1080p(1920x 1080)	
Brightness		2000 ANSI lumens	
Contrast ratio		10000:1	
Keystone Correction		1D, Vertical +/- 40 degrees	
Aspect Ratio		Native 16:9 (5 aspect ratio selectable)	
Light Source		210W	
Light Source life*		3000/4500/6500 (hours)	
Optical			
Throw Ratio		1.15~1.5	
Projection Offset		Vertical: 115% +/-5%	
Zoom Ratio		1.3x	
Lens		F=2.59~2.87, f=16.88~21.88	
Projection Size		30" ~ 300"	
Compatibility			
Resolution Support		VGA(640 x 480) to WUXGA(1920 x 1200)	
Horizontal Frequency		15K~102KHz	
Vertical Scan Rate		23-120Hz	
HDTV Compatibility		480i, 480p, 576i, 576p, 720p, 1080i, 1080p	
Video Compatibility		NTSC, PAL, SECAM, SDTV(480i/576i), EDTV (480p/576p,	
		HDTV (720p, 1080i/p 60Hz)	
3D Compatibility (Please refer to User Manual for detailed support timing.)		Frame Sequential: Up to 60Hz 720p	
		Frame Packing: Up to 24 Hz 1080p	
		Side by Side: Up to 24Hz 1080p	
		Top Bottom: Up to 60Hz 1080p	
Advanced Feature			
Security		Security bar	
Interface			
Computer in (D-sub 15pin)		x1 ( integrate with component)	
HDMI		x2 (HDMI with MHL2.0 x1, HDMI x 1)	
MHL		x 1(HDMI with MHL2.0)	
Monitor out		No	
Composite Video in (RCA)		x 1	
S-Video in		No	
Audio in (Mini Jack)		x 1	
Audio in (L/R)		x1	
Audio out (Mini Jack)		x 1	
Speaker		10W x 1 with CinemaMaster Audio+	
USB (Type A)		x 1	
USB (Type mini B)		x 1 ( service only)	
RS232 (DB-9pin)		x 1	
IR Receiver		x2 (Front and Rear)	
General			
Power Consumption		270 W(Normal), 220 W(Eco), Standby <0.5W	
Standby Power Consumption		Automatic power off after 20 minutes without a display source.	
Power Supply		AC 100 to 240 V, 50/60 Hz	
Product Dimensions		346.24 mm (W) x 101.70 mm (H) x 214.81 mm (D)	
Product Weight		2.75kg	
Environmental Notice		Lamp in this product contains mercury.	
		To dispose of the product or used lamps, consult your local environment authorities for regulations or see <a href="http://www.lamprecycle.org">www.lamprecycle.org</a> .	
Picture Modes		Bright / Vivid/ Cinema / Game/ User	
On Screen Display Language		Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)	
Accessories		Standard	Optional
		Remote Control w Battery	Spare Lamp Kit
		User Manual CD	RS232 Cable
		QSG	Universal Ceiling Mount
		Warranty Card (by region)	Carry Bag
		Power Cord (by region)	Wireless FHD Kit(WDP02)


## W1090 Projector

### Distant chart


Screen dimensions			Projection distance «D» [mm]			Offset (full height definition) «E» [mm]
Diagonal «A» [inch (mm)]	Height «B» [mm]	Width «C» [mm]	Min distance (with max zoom)	Average	Max distance (with min zoom)	
50 (1270)	623	1107	1273	1461	1649	93
60 (1524)	747	1328	1528	1753	1979	112
70 (1778)	872	1550	1782	2046	2309	131
80 (2032)	996	1771	2037	2338	2639	149
90 (2286)	1121	1992	2291	2630	2969	168
100 (2540)	1245	2214	2546	2922	3299	187
110 (2794)	1370	2435	2800	3214	3628	205
120 (3048)	1494	2657	3055	3507	3957	224
130 (3302)	1619	2878	3310	3799	4288	243
140 (3556)	1743	3099	3564	4091	4618	262
150 (3810)	1868	3321	3819	4383	4948	280
160 (4064)	1992	3542	4073	4676	5278	299
170 (4318)	2117	3763	4328	4968	5608	318
180 (4572)	2241	3985	4583	5260	5937	336
190 (4826)	2366	4206	4837	5552	6267	355
200 (5080)	2491	4428	5092	5844	6597	374
250 (6350)	3113	5535	6365	7306	8245	467
300 (7620)	3736	6641	7638	8767	9896	560

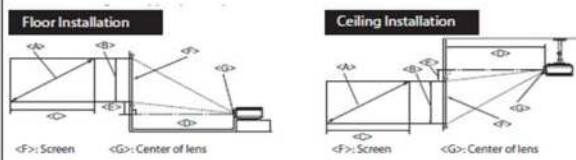

### Ceiling mount Chart




\*Ceiling Mount Screws:  
M4 (Max. L=25, Min. L=20)

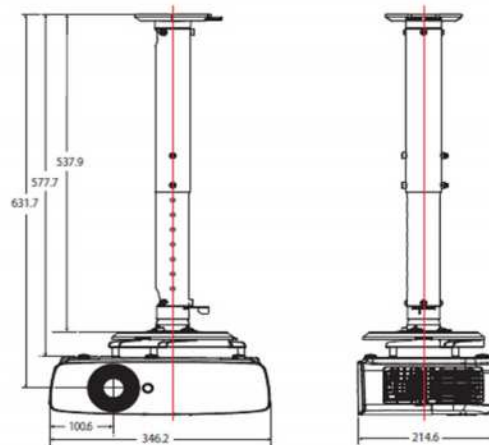

Unit: mm

### Dimension

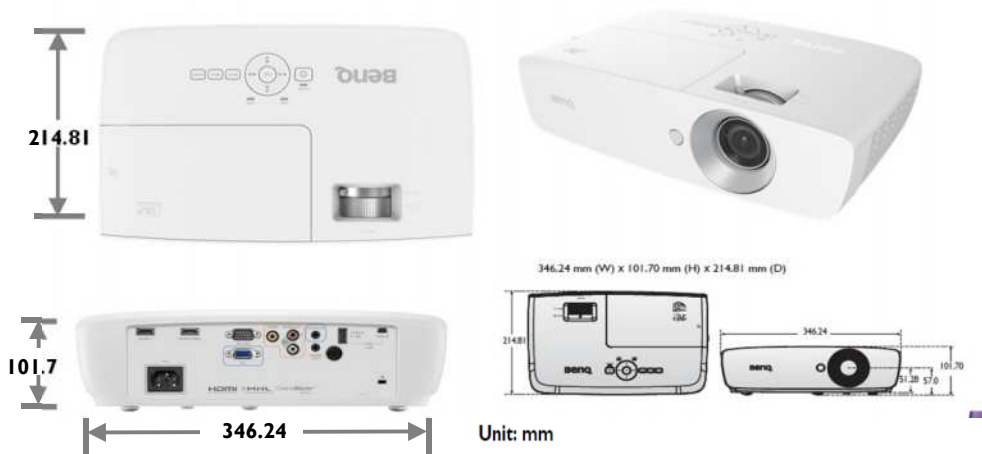

Unit: mm

