

Looks aren't everything!



The EP727 not only offers fantastic looks and style but also great performance. Super-bright 2200 lumens and great XGA picture quality with striking realistic colour enhances powerful business presentations and enticing home videos.


- 2200 lumens to highlight presentations to the finest detail
- Designer styling: light, compact at 2kg and as versatile on the move as when installed
- Advanced Colour Enhancement Technology and 2200:1 contrast gives exceptional colour to create crystal clear presentations and video
- Digital and Analogue connectivity, capability includes: DVI, HDMI, 2 x VGA
- Auto power-off feature shuts down the projector when not in use, saving power and increasing lamp life

Easy to use:

- Fully featured remote control with laser pointer and mouse control
- 5 preset picture modes to adjust the settings to match a variety of different applications
- 15 second start-up and cool down time to reduce both time and money in energy use

- Extensive RS232 Command list for AV installations
- Password Security for added Protection
- Long Lamp Life - 3000 hours standard

Deeper saturated colours with Optoma five segment colour wheel maximises colour accuracy

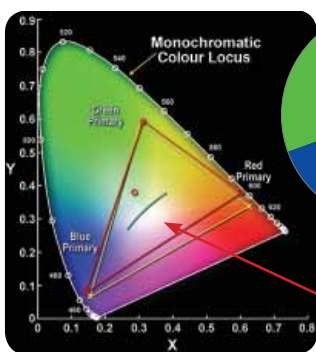

Bright, Vivid Colours with 5 segment colour wheel

Specifications

EP727	
Native Resolution	XGA 1024 x 768
Compressed Resolution	Up to SXGA+ (1400 x 1050)
Brightness	2200L - BRIGHT mode / 1500L - STD mode
Contrast	2200:1
Noise Level	30dB
Lamp Life*	3000/2000 (STD/BRIGHT mode)
Display Technology	Single 0.55" XGA type X DMD chip
Weight / Dimensions (W x D x H)	2 kg / 259 x 188 x 71.5mm
Remote Control	Full Function Remote Mouse with Laser and Direct Source selecting
INPUTS:	DVI-I (HDCP) HDMI via adaptor 2nd VGA via adaptor VGA In Component via adaptor SCART via adaptor S-Video Composite via adaptor 3.5mm Stereo Jack, USB (remote mouse)
CONTROL	RS232 3 Pin Mini DIN
OUTPUTS:	PC 15 Pin D-Sub (monitor loop-through)
Audio	1 x 1W Speaker
Aspect Ratio	4:3 Native, 16:9 Compatible
Keystone Correction	± 18 Degrees Vertical
On Screen Display	16 Languages: English, German, French, Italian, Spanish, Portuguese, Polish, Dutch, Russian, Finnish, Swedish, Greek, Norwegian/Danish, Hungarian, Czech & Arabic
Video Compatibility	PAL SECAM 576i/p, NTSC 480i/p, HD 720p/1080i
Uniformity	85%
Displayable Colours	16.7 Million
Projection Lens	F=2.41 ~ 2.55, f=21.79 ~ 23.99mm, 1.1x Manual Focus
Throw Ratio	1.95 ~ 2.15:1 (Projection Distance:Image Width)
Projection Distance	1.2 - 12m
Image Size	0.70 - 7.70m (27.49" - 303.12") Diagonal 4:3
Horizontal / Vertical Scan Rate	15 - 100kHz / 43 - 85Hz
Power Supply	100-240V, 50-60Hz with PFC Power Supply
Power Consumption	260W Maximum < 10W Standby mode
Operating Conditions	Operating: 5 - 40°C, 80% Humidity (Max), 3000m Altitude (Max)
Security	One Kensington Lock Port, Password Protection
Standard Accessories	Lens Cover, AC Power Cord, VGA Cable, S-Video & Composite adaptor, USB Cable, Full Function Remote, Batteries x 2, Soft Carry Bag, Quick Start Guide, CD User Manual, Warranty, WEEE Card
RoHS	Compliant
Lamp Warranty	6 months or 1000 hours - whichever is soonest
Warranty	Warranty will vary by country. Please see www.optomaeurope.com or ask your local supplier for details



EP727 Remote Control

- 1 Laser
- 2 Remote Mouse
- 3 Vertical Keystone Correction
- 4 Volume Control
- 5 Brightness Adjustment
- 6 AV Mute
- 7 Direct Input Source Selection

EP727 Connections

- 8 VGA Loop through
- 9 VGA In - Component & SCART via adaptor
- 10 DVI-I - HDMI and 2nd VGA via adaptor
- 11 S-Video - Composite via adaptor
- 12 Audio In
- 13 RS232
- 14 USB (remote mouse)



EP727 Projection Distance 1.2 - 12m (4:3 Aspect Ratio)							
Projection Distance (m)	Max. Horizontal Image size (m)	Min. Horizontal Image size (m)	Max. Screen Height (m)	Min. Screen Height (m)	Max. Diagonal Image Size (m)	Max. Diagonal Image Size (Inch)	Max. Image Offset (m)
1.20	0.62	0.56	0.46	0.42	0.77	30.31	0.07
2.00	1.03	0.93	0.77	0.70	1.28	50.52	0.12
2.50	1.28	1.16	0.96	0.87	1.60	63.15	0.14
3.00	1.54	1.40	1.16	1.05	1.92	75.78	0.17
4.00	2.05	1.86	1.54	1.40	2.57	101.04	0.23
5.00	2.56	2.33	1.93	1.75	3.21	126.30	0.29
6.00	3.08	2.79	2.31	2.10	3.85	151.56	0.35
7.00	3.59	3.26	2.70	2.45	4.49	176.82	0.40
8.00	4.10	3.72	3.08	2.80	5.13	202.08	0.46
9.00	4.62	4.19	3.47	3.15	5.77	227.34	0.52
10.00	5.13	4.65	3.86	3.50	6.42	252.60	0.58
11.00	5.64	5.12	4.24	3.85	7.06	277.86	0.64
12.00	6.15	5.58	4.63	4.20	7.70	303.12	0.69

For guide purposes only

EP727 is capable of 16:9 aspect ratio projection. When projecting a 16:9 image the image sizes, screen height and offset information will differ to that of above.

Optoma recommends Panoview screens

Panoview
www.panoview.eu

Optoma Europe Ltd.
42 Caxton Way, Watford Business Park, Watford, Hertfordshire, UK. WD18 8QZ
www.optoma.eu