



Model	Epson EMP-6110
Specifications	
Projection system (3LCD)	0.8-inch non MLA (x3) TFT
Native resolution	XGA (1024x768)
Resolution supported	VGA ~ UXGA
Brightness	High/Low brightness mode: 3500 ANSI lm / 2700 ANSI lm
Projection lens	
F Number	1.75 - 2.42
Focal Length	24 mm-38.2 mm
Focus/Zoom type	Manual Focus / 1.6 X Optical Zoom
Lens protection	Glass cover
Lamp	
Type: 230W UHE	
Life: (Low/High brightness mode) 4000 hours / 3500 hours	
Filter Type	High efficiency cleanable
Colour Reproduction	Full-Colour (16.77 million colours)
Fan noise	Low/High brightness mode: 33 dB / 39 dB
Contrast ratio	600:1
Screen size (Projection distance)	30 to 300 inch (0.83 to 14.69m)
Keystone correction	Vertical: -30 to +30 degrees
Input	
Computer	2xD-sub 15-pin (RGB)
Video	2xD-sub 15-pin (component), 1xRCA, 1xS-Video
Audio	3xStereo mini-jack, 2xRCA (White/Red)
Output	Computer / Audio: 1xD-sub 15-pin / 1xStereo mini-jack
Built-in speaker	5 W monaural
Control	RS-232C
Network	1xRJ45 (LAN)
Direct Power On/Off	Yes
Security	Security bar/Kensington Lock hole
Other functions	Source Search, Auto Detection of RGB, Operation Panel Protected Function, Password Protected Function, 8 Colour Modes, High Altitude Mode, User logo, Freeze, A/V Mute, E-Zoom, Help, AMX Device Discovery, Remote ID Function
Operating temperature / altitude	0 °C to 40 °C / 0 to 3,048m (High Altitude Mode over 1500m)
Power supply wattage	100 - 240 V AC ±10%, 50/60 Hz
Power consumption lamp on (220/240 V area)	316W
Power consumption stand-by (220/240 V area)	0.7W (network off) / 9.2W (network on)
Weight	7 kg
Dimension (D x W x H)	340 x 465 x 146 mm (excluding feet)
On-screen menu	24 languages (English / French / German / Italian / Spanish / Portuguese / Russian / Swedish / Norwegian / Finnish / Danish / Dutch / Hungarian / Czech / Polish / Slovenian / Romanian / Turkish / Greek / Arabic / Japanese / Simplified Chinese / Traditional Chinese / Korean)
Network performance Function	Projector control and projector management via network E-Mail notification SNMP Web control PJ-Link
Software	EMP Monitor (for Windows) / EPSON Projector Control (for Windows)
Supplied Accessories	
Power Cable	3m
Computer Cable	1.8 m D-sub 15pin (Male) - D-sub 15pin (Male)
Cable cover	included
TCO pack	
Ceiling Mount Kit (silver)	ELPMB21
Spare Lamp	ELPLP45
Spare High efficiency air filter	ELPAF11
Remote Control	With 2xAAA type alkaline batteries
Epson Projector Software (CD-ROM)	included
Password Protect Sticker	included
User Manual	included
Warranty	3 years
Optional Accessory	Smoke Air Filter: ELPAF12



Top View

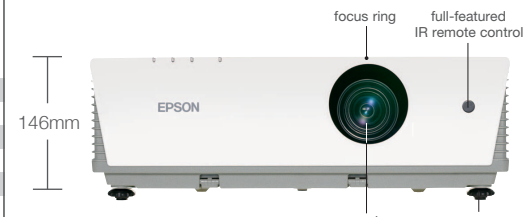

Front View

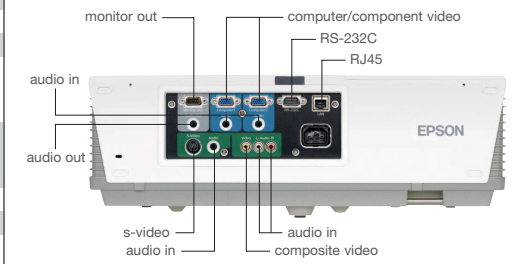

Rear View

Screen Size & Projection Distance

4:3 Screen size	Shortest (Wide)	Longest (Tele)	Vertical distance from center of lens to bottom edge of screen
X (screen size / dimension)	Y (cm / inch)	Y (cm / inch)	Z (cm / inch)
30" / 81 cm x 46 cm 24.0" x 18.1"	83 / 33	139 / 55	4 / 1.6
40" / 81 cm x 61 cm 31.9" x 24.0"	114 / 45	189 / 74	6 / 2.2
60" / 120 cm x 90 cm 47.2" x 35.4"	174 / 69	287 / 113	8 / 3.3
80" / 160 cm x 120 cm 63.0" x 47.2"	235 / 93	386 / 152	11 / 4.4
100" / 200 cm x 150 cm 78.7" x 59.1"	296 / 117	484 / 191	14 / 5.5
200" / 410 cm x 300 cm 161.4" x 118.1"	601 / 237	977 / 385	28 / 10.9
300" / 610 cm x 450 cm 240.2" x 181.1"	906 / 357	1469 / 578	42 / 16.4



For further information please contact your local Epson office or visit www.epson-europe.com
 Austria 0810/20 01 13 (0.07 €/Min.) Belgium 070/350120 (0.1735 €/min.) Czech 800/142 052 Denmark 44 50 85 85 Finland 0201 552 091
 France 0892 899 999 (0.34 €/min.) Germany 01805/23 41 10 (0.14 €/Min.) Greece 210-8099499 Hungary 06800 147 83 Ireland 1 800 409132
 Italy 02-660321 10 (0.12 €/min.) Luxembourg 900/43010 (0.24 €/min.) Middle East +9714 8818934 Netherlands 0900-5050808 (0.05 €/oproep
 + 0.15 €/min.) Norway 22 06 42 80 Poland 0-0-800 4911299 (0.16 zł/min.) Portugal 707 222 111 Russia (095) 777-03-55 Slovakia 0850 111 429
 South Africa (+2711) 465-9621 Spain 93 582 15 00 Sweden 0771-400135 (Mobilsamtal - 0.99 kr/min, Lokala samtal - 0.30 kr/min, Utlandssamtal -
 0.89 kr/min) Switzerland 0848 448820 (4-8 cent./min.) Turkey (0212) 3360303 United Kingdom 08702 416900

Entity carrying out management and coordination pursuant to article 2497 bis of Civil Code: Epson Europe BV

Epson® is a registered trademark of Seiko Epson® Corporation. All other product names and other company names used herein are for identification purpose only and may be trademarks or registered trademarks of their respective owners. Errors and omissions excepted, all specifications are subject to change without notice.




Perfect projection even in the most demanding conditions



With the Epson EMP-6110 you can rely on superb picture quality and trouble free operation even in the toughest environments.

High quality, reliable projection

Wherever you are, from factories, workshops and clubs to theatres, lecture halls or sports arenas, the robust Epson EMP-6110 will deliver unparalleled quality and performance every time. To ensure a longer life the projector has a completely sealed casing and only clean air that has passed through the high efficiency electrostatic air filter is allowed for cooling.

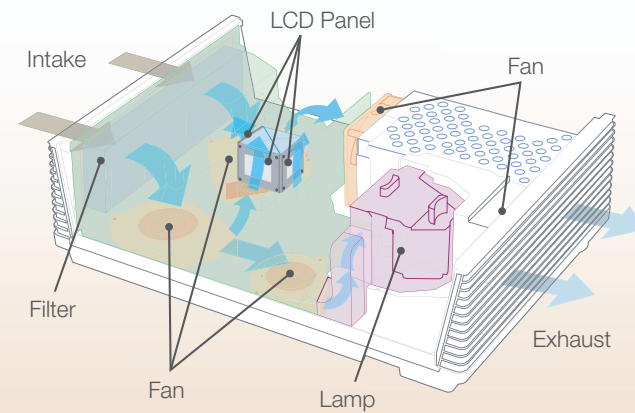

Innovative, simple filter maintenance


In dusty or smoky conditions the air filter is critical. Our specially designed electrostatically charged filter is highly robust for a longer life. Our exclusive on-screen cleaning notification function is capable of sensing a clogged filter in advance and letting you know. And with only one intake of air at the side of the projector, the filter is simple to remove.



To clean the dust filter simply remove it and tap or vacuum.

Flexible monitoring and control

The Epson EMP-6110 is equipped with a network interface for easy monitoring and control. Our Epson EMP Monitor™ software enables you to configure and operate the projector remotely over your network. You can even set an e-mail alert for the inside temperature of your projector or filter status to prevent any possible problems disrupting your important presentations.

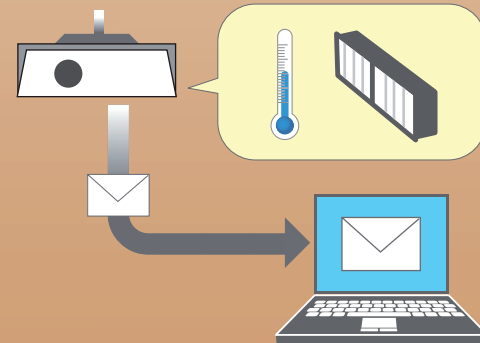

Perfect for ceiling mounted installation

Extensive connectivity options, network management, security features and ease of maintenance all make the Epson EMP-6110 ideal for mounting on the ceiling.



Easy to access lamp replacement even when ceiling mounted

Robust and reliable for high performance in demanding environments

- Perfect picture quality in any light conditions and any sized room with 3500 ANSI lumens and XGA resolution
- Bright, natural colours through Epson's 3LCD technology
- Keeps on working in the toughest conditions through sealed design and high efficiency electrostatic filter

- Low TCO* with up to 4000h lamp life (eco mode) and free accessories including ceiling mount kit, spare lamp and spare filter
- Advanced remote network monitoring and control with Epson EMP Monitor™



Shutter for zoom & focus protection



Cleanable glass cover protects the lens from damage and smoke or dust degradation

High efficiency filter keeps dust away and your images clean and bright

Ecological and economical

The Epson EMP-6110 gives you a low TCO*. With 3500 hours in high brightness mode (3500 ANSI lumens), its lamp life is unparalleled. Dust and smoke proof features protect the engine and guarantee a longer life whatever the conditions. In fact, your projector even comes with a special TCO pack includes a ceiling mount, spare lamp and dust filter free of charge so you have everything needed for long term trouble free operation.



*Total Cost of Ownership

Epson 6110
EMP