



> **NEW POWER**

> **NEW FREEDOM**

> **NEW VISIONS**


- 5,400 ANSI-lumens
- 100 % projection offset
- WXGA 1,280 x 800



# wx5400



|                             |   |
|-----------------------------|---|
| Display                     | 0.65" DMD™ Chip   |
| Resolution                  | WXGA 1,280 x 800  |
| Brightness                  | 5,400 ANSI-lumens / 2,700 ANSI-lumens single lamp   |
| Colour reproduction         | 16.7 mio. colours   |
| Contrast                    | 2,400:1   |
| Projection format           | 16:10 switchable to 16:9 / 4:3  |
| Lamp                        | 2 x 280 W (TLPLW25)   |
| Maximal lamp life           | up to max. 2,000 hours /<br>up to 3,000 hours in Eco mode   |
| Lens                        | lens-dependent  |
| Zoom                        | 1.32 x  |
| Frequency (hor./vert.)      | 15 - 120 kHz / 50 - 150 Hz  |
| Projection                  | front, rear and ceiling   |
| Digital keystone correction | vertical +/- 40°, hor. +/- 35°  |
| Picture size (diagonal)     | lens-dependent  |
| Projectionoffset            | 100 %, lens shift lens-dependent  |
| Input signals               | NTSC / PAL / SECAM, 480i, 480p, 576i, 576p, 720p, 1,080i, VGA, SVGA, XGA, WXGA, SXGA, UXGA (compr.)                           |
| Inputs                      | 1 x RGB (D-sub 15), 5 x BNC, DVI-D, component (3 x RCA), composite video (1 x RCA), S-video                                   |
| Outputs                     | 1 x RGB (D-sub 15), audio   |
| Serial interface            | RS-232C (D-sub 9pin)  |
| Power supply                | AC 100 - 240 V, 50/60 Hz  |
| Loudspeaker                 | 2 x 3 W   |
| Dimensions (W x H x D)      | 505 x 215 x 385 mm  |
| Weight                      | 17.0 kg   |
| Operation noise             | ECO Mode 36 dB / normal 39 dB   |
| Specials                    | auto setup, auto keystone correction, user logo capture, password, black board-function, panelock, digital zoom               |
| Accessories                 | remote control with laserpointer and batteries, mouse remote receiver, softcase, owners manual (CD-ROM), RGB- and power-cable |
| Options                     | ceiling mount, optional lenses, spare lamp, camera c001   |
| Menu guidance               | 8 languages: English, French, German, Italian, Spanish, Swedish, Japanese, Chinese  |

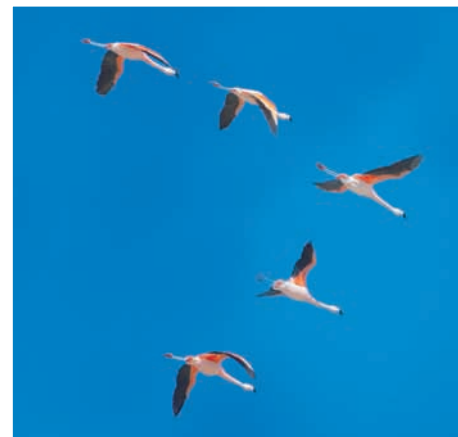

| Option Lens          | Short Throw Fix | Short Throw     | Standard        | Middle Zoom     | Long Zoom      |
|----------------------|-----------------|-----------------|-----------------|-----------------|----------------|
| Model                | TLPSFL54        | TLPSL54         | TLPNL54         | TLPML54         | TLPLL54        |
| Type                 | fix             | zoom            | zoom            | zoom            | zoom           |
| Throw ratio          | 0.77 : 1        | 1.33 - 1.79 : 1 | 1.78 - 2.35 : 1 | 2.22 - 4.43 : 1 | 4.43 - 8.3 : 1 |
| Zoom                 | no              | power           | power           | power           | power          |
| Focus                | power           | power           | power           | power           | power          |
| Zoom ratio           | 1               | 1.34            | 1.32            | 2               | 1.87           |
| Range of screen size | 50 - 200        | 40 - 500        | 40 - 500        | 40 - 500        | 40 - 500       |
| @ 100 inch (m)       | 1.74            | 2.96 - 3.99     | 3.96 - 5.24     | 4.97 - 10.00    | 9.84 - 18.6    |
| Lens shift           | Vertical        | no              | 77 %            | 77 %            | 77 %           |
|                      | Horizontal      | no              | 10 %            | 10 %            | 10 %           |
| Weight               | 1.0 kg          | 1.1 kg          | 0.8 kg          | 1.1 kg          | 0.9 kg         |

**TOSHIBA**  
Leading Innovation >>>

www.toshiba-projectors.com

Toshiba Europe GmbH · Projection & Display Technology  
Phone: ++49-2131-158-01 · Fax: ++49-2131-158-835  
e-mail: projektoreninfo@toshiba-teg.com