



3M™ Super Close Projection System SCP715

Whether you're looking for bright and colorful projected presentations, or you have projection room space constraints, the 3M Super Close Projection System SCP715 is the ideal solution. Utilizing 3M's patented technology, you can display large images with this tabletop or ceiling mounted projector close to the screen, for the ultimate professional image.




SCP715 shown with optional folding wall mount

3M SCP715 Projector
78-9236-6937-4

Features

- Two computer/component RGB inputs
- One computer RGB output – ideal for teacher's monitor
- RJ-45 ethernet connection provides network capabilities and basic remote administration
- RS232 connection for basic remote control
- +5V/2A DC power output
- S-video input for connecting a DVD/analog video device
- DVI-D connection
- RCA Audio/Video for camcorders, digital cameras, gaming and more
- One USB port
- Audio output connection can be used with personal speakers

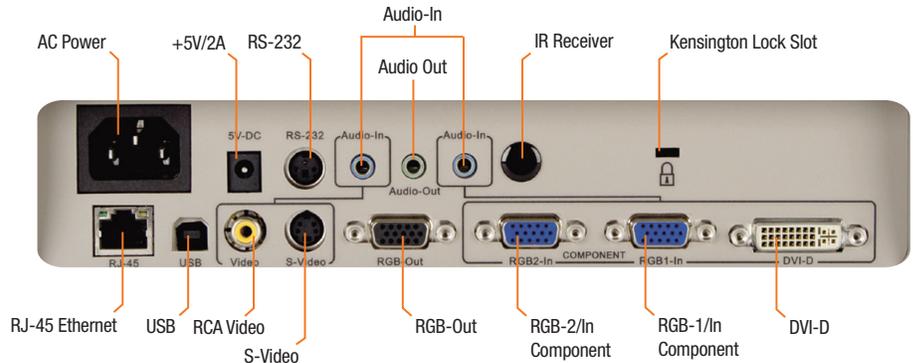

Optical

Vikuiti™ Super Close Projection technology by 3M

DMD Panel

.7 in. DLP

Resolution

Native: true XGA (1024 x 768)

Aspect Ratio

4:3 native and 16:9 supported

Contrast Ratio

1600:1

Digital Zoom

100% to 200%

Brightness

2200 lumens (maximum rating)

Projection Lens

F2.6

Throw Ratio (Distance: Image Width)

0.68

Image Size (range)

Table top: 30-120 inches (.76m - 3.04m)

Wall mounted: 55-85 inches (1.4m - 2.1m)

Focus

Manual (1.2x)

Lamp

180W (normal mode), 150W (whisper mode)

Lamp Life

2000 hours (normal); up to 3000 hours (whisper)

Security

Integrated Kensington Lock Slot

Size

Dimensions (W x D x H)

12.5 x 12.2 x 4.9 in. (317.5 x 309.98 x 124.46mm)

Weight

9.9 lbs (4.5kg)

System Specifications

Video Compatibility

NTSC, PAL, SECAM, 480i/p (1080i), 720p

PC Compatibility

640 x 480 (VGA), 800 x 600 (SVGA), 1024 x 768 (XGA), 1280 x 1024 (SXGA), 1280 x 960* (iMAC), 1152 x 870* (MAC), 1024 x 768 (MAC 19")

*resolution digitally compressed

Digital Keystone Correction

Vertical ±16 degrees

Audio Output

Two 2 Watt speakers

Noise Level

Normal 35dB; Whisper 32dB

Power Consumption

200W (Max, <20K Stand by)

Power Supply

Universal: 100-130V/220-240V, 50/60Hz

Regulatory Approvals

FCC Class B, CCC for China, NOM, EK, cULus, CE Class B, RoHS

Warranties

For details see www.3m.com/meetings/warranties

Projector

3 year limited, parts and labor on projector (see website for optional warranty)

Lamp

90 days or 180 hours with remainder of year 1 prorated

Technical Support

- Free unlimited software downloads and updates available on our website at www.3m.com/meetings
- 24/7 Technical Support by calling 800.328.1371



Accessories Included

1.8m power cord (US, UK, Europe)

1.8 m 15 pin D-sub VGA cable

3.5mm audio cable

USB cable

Remote control with batteries

Multi-language Operator's Guide (CD)

Quick Start Guide

Product Safety Guide

WEEE card (EMEA)

Optional Accessories

SCP715 lamp replacement kit 78-6969-9949-5

C1 universal ceiling mount -black 78-6969-9928-9

C1 universal extender pole

& plate -black 78-6969-9927-1

(Order if required to match SKU 78-6969-9928-9)

P1 universal ceiling mount -white 78-6969-9874-5

3M Folding Wall Mount with Speakers

(EU/UK) 78-6969-9989-1

3M Folding Wall Mount with Speakers

(US) 78-6969-9941-2



Image Size – for ceiling mount or table top use	
Screen Size Diagonal [inch (m)]	Projection Distance Maximum [inch (m)]
60" (1.5)	32.6" (.82)
70" (1.7)	38.1" (.97)
80" (2.0)	43.5" (1.10)
90" (2.3)	48.9" (1.2)
95" (2.4)	51.7" (1.3)
100" (2.5)	54.4" (1.38)

Note: These sizes are ±10 percent. This is due to variations in the manufacture of the lens. If you are close to one of the endpoints you should verify with your unit that the image is the proper size at the proper distance.

800.328.1371 | www.3m.com/meetings



3M Projection Systems

Building A147-5N-01
6801 River Place Blvd.
Austin, TX 78726-9000
USA

3M Canada

PO Box 5757
London,
Ontario, Canada
NGA 4T1

3M Mexico, S.A. de C.V.

Apartado Postal 14-139
Mexico, D.F. 07070
Mexico

Limited Warranty

The 3M SCP700 Series projector (the "3M Product") is warranted to be free from defects in material or manufacture for a period of three (3) years from the date of purchase or 4,000 hours of usage, whichever occurs first. All other accessories of the 3M Product (those in the applicable modular configurations), excluding the projector lamps, but including the wall mounts, ceiling mounts, digital annotation sensors, and input/output devices are warranted to be free from defects in material or manufacture for a period of one (1) year from the date of purchase. The lamp component of the 3M Product is warranted to be free from defects in material and manufacture for a period of for a period of ninety (90) days after the date of purchase of the 3M Product or 180 hours of lamp usage, whichever occurs first. This warranty is for parts only and in the case of an approved warranty claim for a lamp, your exclusive remedy will be for a replacement product shipped to your location. Optional product upgrades and/or accessories that are not sold as part of any modular configuration are subject to individual warranties.

THE WARRANTIES STATED ABOVE ARE EXCLUSIVE AND ARE MADE IN PLACE OF ANY AND ALL WARRANTIES, EXPRESS OR IMPLIED WARRANTIES OR CONDITIONS, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, OR ANY INDUSTRY PRACTICE OR CUSTOM OR TRADE USAGE. For exclusions, see complete warranty information at www.3m.com/meetings

3M, and the 3M logo are trademarks of 3M Company. Used under license in Canada. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.