

MULTIMEDIA PROJECTOR BR325



EASY-TO-USE PERFORMANCE TOOL



Comprehensive connectivity to satisfy your current and future needs



15,000:1 Contrast ratio helps deliver the most impactful presentations



Up to 10,000 hours of lamp life for minimal cost of operation



Full featured remote for maximum convenience



RS-232C port for remote operation and control


Full 3D

HDMI™
HIGH DEFINITION MULTIMEDIA INTERFACE

HDTV
MONITOR



PICTURE BY
DLP
TEXAS INSTRUMENTS

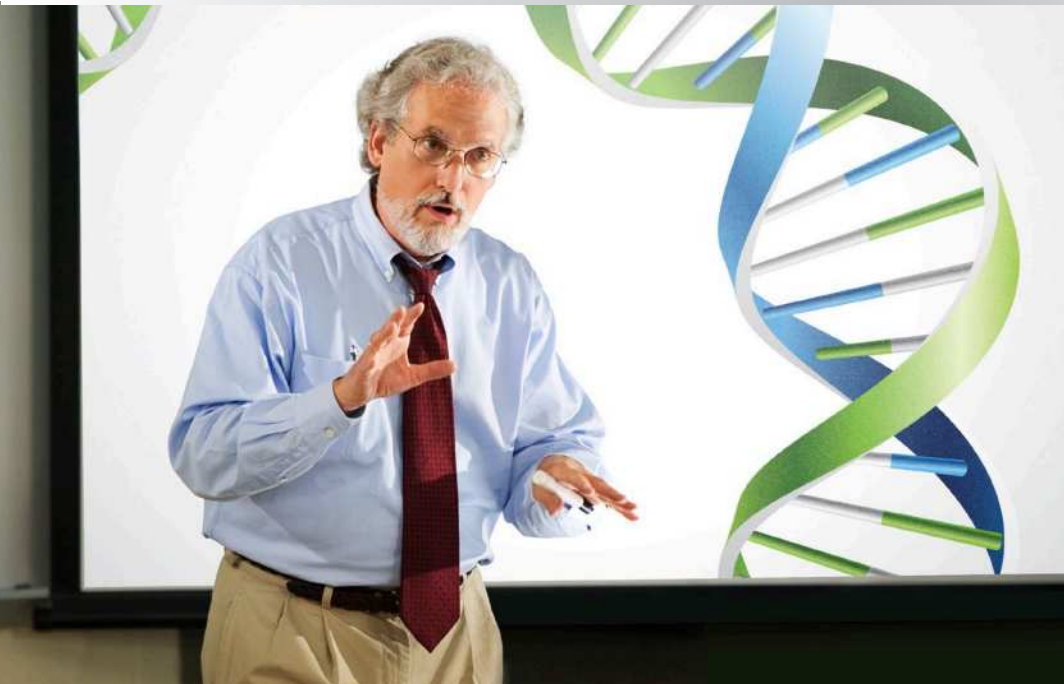

The Optoma BR325 projector generates a powerful, up to 3200 lumens bright image, combined with an industry leading 15,000:1 contrast ratio to bring out the finest details on your most important presentations or class lessons. HDMI connectivity for full digital compatibility as well as two VGA inputs, composite and S-video to satisfy your current and future needs.

The BR325 is incredibly easy to operate. Connect power and source, press the power ON button, and you will be presenting in no time.

CONNECTIVITY (May require optional accessories)

ProSelecta

View :: Compare :: Select - www.ProSelecta.com

MULTIMEDIA PROJECTORS — BR325

OPTICAL/TECHNICAL SPECIFICATIONS


Display Technology	Single 0.55" DC3 DMD DLP® Technology by Texas Instruments™
Native Resolution	XGA (1024 x 768)
Maximum Resolution	UXGA (1600 x 1200) & 1080p (1920 x 1080)
Brightness	3200 lumens
Contrast Ratio	15,000:1 (full on/full off)
Displayable Colors	1.07 Billion
Lamp Life and Type*	10,000/6500/6000/4500 Hours (Education cycle/ECO+/Dynamic/Bright) 190W
Projection Method	Front, rear, ceiling mount, table top
Keystone Correction	±40° Vertical
Uniformity	>80%
Offset	115%
Aspect Ratio	4:3 Native, 16:9 compatible
Throw Ratio (distance/Width)	1.97–2.17
Projection Distance	3.9'–32.8' (1.2–10 m)
Image Size (Diagonal)	30"–300" (0.7–7.62 m)
Projection Lens	F=2.51–2.69, f=21.95–24.18 mm, 1.1x manual zoom and focus
Digital Zoom	0.8 ~ 2.0
Audio	2-Watt speaker
Noise Level	26dB
Remote Control	IR remote mouse control
Operating Temperature	41–113°F (5–45°C), 85% max humidity
Power Supply	AC Input 100–240V, 50–60Hz, auto-switching
Power Consumption	Max 240W (Normal), Min 194W (Eco+), <0.5W (standby-ECO)

COMPATIBILITY SPECIFICATIONS

Computer Compatibility	UXGA, WXGA, SXGA+, SXGA, XGA, SVGA, VGA resized, VESA, PC and Macintosh compatible
Video Input Compatibility	NTSC, PAL, SECAM, SDTV (480i), EDTV (480p), HDTV (720p, 1080i/p)
3D Compatibility†	Supports all HDMI 1.4a mandatory 3D format, side-by-side format and top and bottom format. 3D glasses are needed and sold separately.
Vertical Scan Rate	24–85Hz, 120Hz, 144Hz
Horizontal Scan Rate	15.375–91.146KHz
User Controls	Complete on-screen menu, adjustments in 27 languages
I/O Connection Ports	HDMI v1.4a, two VGA-in, VGA-out, S-video, composite video, two audio-in, audio-out, RS-232C, USB-B
Loop Through (Audio, VGA)	<i>Monitor:</i> D-Sub 15 pin VGA output (functional in both normal and standby modes), <i>Audio:</i> VAO audio out, HDMI VAO audio out supported, (VAO in normal mode, fixed during Standby)

PHYSICAL SPECIFICATIONS

Security	Kensington® Lock Port, security bar and keypad lock
Weight	4.9 lb (2.21 kg)
Dimensions (W x H x D)	12.4" x 4.6" x 8.8" (315 x 116 x 223 mm)

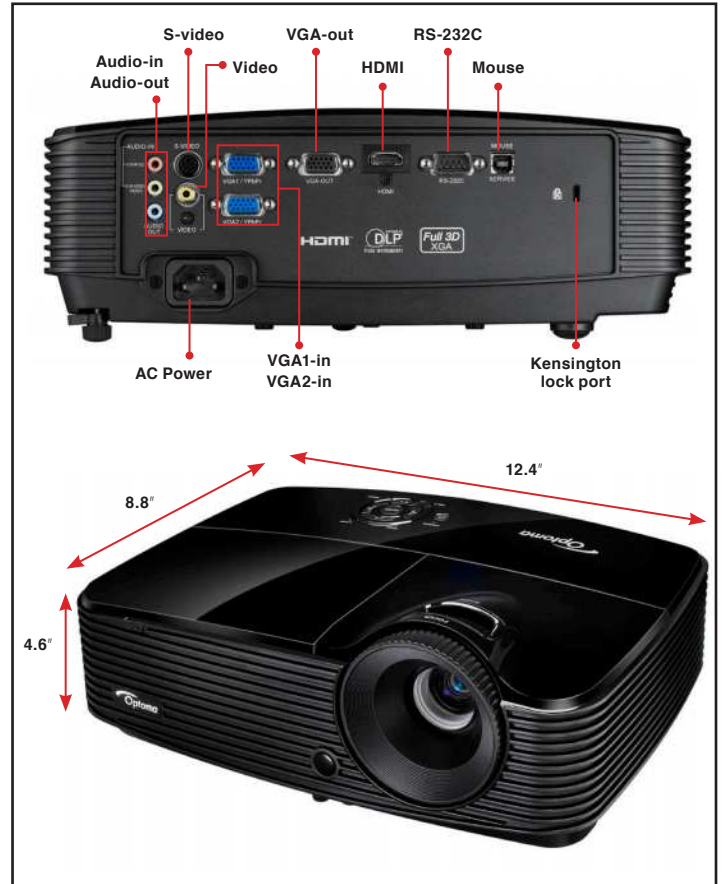

Warranty

2-Year Optoma Express Service, 1-Year Lamp

In the Box (Standard Accessories)

AC power cord, VGA to VGA cable, remote control, batteries for remote, carrying case, multilingual CD-ROM user's manual, quick start card, and warranty card

Optional Accessories

HDMI cable, ceiling mount, component to VGA cable, RS-232 cable, Optoma screens and DLP® Link™ 3D glasses

Accessory Part Numbers:

Lamp: BL-FU190C	Remote: BR-5043N
Mount: BM-5001U	Power cord (5m): BC-PUPIXY05
Wireless VGA dongle: BI-EXTBG03	DLP® Link™ 3D glasses: BG-ZD301
Carrying case: BK-4032	

UPC 796435 41 882 3

*Lamp life is dependent on many factors, including lamp mode, display mode, usage, environmental conditions and more. Lamp brightness can decrease over time.

†3D content can be viewed with either RF or DLP Link active shutter glasses when projector is used with a compatible 3D player. RF 3D glasses require the use of an RF 3D emitter and a projector with a 3D VESA Sync port. Please visit www.OptomaUSA.com for more information.

www.OptomaUSA.com

Optoma
Projector Expert