


## Dazzle & Captivate Your Audience

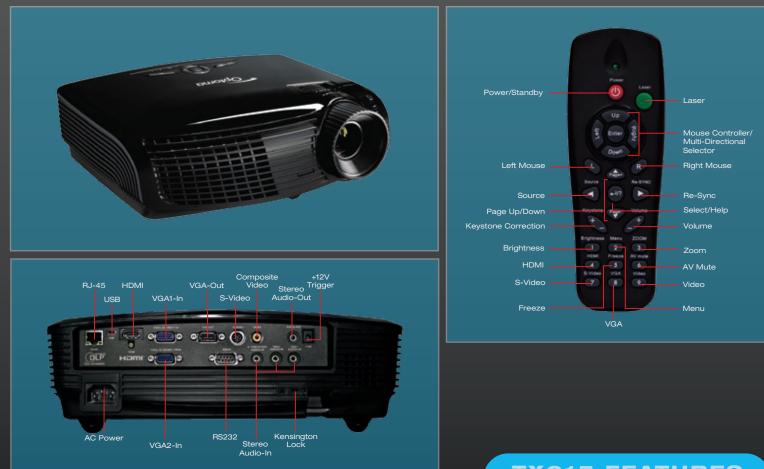

The Optoma TX615 delivers exceptional brightness to overcome ambient light, making it the ideal choice for nearly any installation. Featuring a built-in 10-watt speaker system and wired network management, the TX615 is equipped with the latest color and image processing technologies from Texas Instruments.

## TX615 FEATURES

- Easy-to-read text bright at 3500 ANSI lumens and high 3000:1 contrast ratio
- VGA and audio pass-thru operational on standby mode
- Filter-free design means lower cost of ownership
- Remote management via RS-232 or RJ45 connectivity
- Broad range of audio and video connectivity
- Wireless connectivity with optional dongle



View :: Compare :: Select - www.ProSelecta.com

## **Specifications**

opeemediens			
Display Technology:	Single 0.55" DMD DLP® Technology by Texas Instruments		
Resolution:	Native XGA (1024 x 768)		
Maximum Resolution:	UXGA (1600 x 1200)		
Brightness (Typical):	3500 ANSI Lumens		
Contrast Ratio:	3000:1 (Full On/Full Off)		
Lamp Type:	230W P-VIP		
Lamp Life (STD/Bright):	Estimated at 4000/3000 Hours		
Throw Ratio:	1.95 to 2.15:1 (Distance/Width)		
Image Size (Diagonal):	27.5" to 303" (0.7 to 7.69 m)		
Projection Distance:			
Noise Level (STD/Bright):	29dB/31dB		
Remote Control:	Fully Featured Remote with Laser Pointer and Mouse Functions		
Computer Compatibility:	UXGA, WXGA, SXGA+, SXGA, XGA, SVGA, VGA Resized, VESA, PC and Macintosh Compatible		
Video Compatibility:	NTSC, PAL, SECAM, SDTV (480i), EDTV (480p), HDTV (720p, 1080i/p)		
Aspect Ratio:	4:3 Native, 16:9 & 16:10 Compatible		
Projection Lens:	F=2.4~2.55, f=21.8~24 mm, 1.1x Zoom & Focus		
Offset:	115%		
Loop Through:	Monitor: D-Sub 15-Pin VGA Output Audio: Stereo Mini-Jack Output (Functional in Both Normal and Standby Modes)		
User Controls:	Complete On-Screen Menu Adjustments in 23 Languages		
Audio:	Two 5-Watt Stereo Speakers		
Keystone Correction:	± 40° Vertical		
Vertical Refresh Rate:	25 to 85 Hz		
Horizontal Scan Rate:	15.3 to 91.1 KHz		
Power Supply:	AC Input 100-240V, 50-60 Hz, Auto-Switching		
Power Consumption:	328 Watts (Bright), 272 Watts (STD) <1 Watt (Standby)		
Weight:	6.4 lbs (2.9 kg)		
Dimensions (W x H x D):	12.76" x 3.82" x 9.21" (324 x 97 x 234 mm)		
Operating Temperature:	41° to 104°F (5° to 40°C), 80% Max Humidity, Adjustable Fan Speed for High Altitude Application		
Displayable Colors:	1.07 Billion		
Projection Method:	Front, Rear, Ceiling Mount, Table Top		
Uniformity:	85%		
Security:	Kensington® Lock, Keypad Lock and Security Bar		
I/O Connectors:	HDMI, Two VGA-In, VGA-Out, S-Video, Composite Video, Three Stereo Audio-In, Stereo Audio-Out, +12V Trigger, USB, RS-232 and RJ45		
Standard Accessories:	AC Power Cord, VGA to VGA Cable, Remote Control, Batteries for Remote, USB Cable, Carrying Case, Lens Cap, Quick Start Card, CD-ROM User's Manual and Warranty Card		
Optional Accessories:	Wireless Dongle, Ceiling Mount, HDMI Cable, VGA to Component Cable, S-Video Cable, Composite Video Cable, RS-232 Cable and Panoview™ Series Screens		
Warranty:	Three Years Optoma Express Replacement Service, One Year on Lamp		
UPC:	796435 41 130 5		












Projection Distance/Image Size			
Projection Distance (Feet)	Maximum Diagonal (Inches)	Minimum Diagonal (Inches)	
6			
8			
10			
12			
14	108		
16			
18			

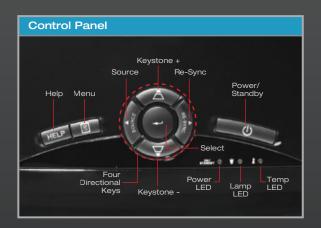

Optional Accessories			
Lamp:	BL-FP230D		
Wireless Dongle:	BI-EXTGB		
Remote:	BR-5030L		
Power Cord (1m):	BC-PUPIXY01		
Power Cord (11m):	BC-PUPIXY11		
S-Video Cable (1.8m):	BC-SVSVXX02		
Composite Cable (1.8m):	BC-COCOXX02		
VGA Cable (5m):	BC-VGVGXX05		
VGA to Component Cable (5m):	BC-VGCRXX05		
VGA to Component Adapter:	BC-VGCRXY00		
Ceiling Mount:	BM-5001U		
Carrying Case:	BK-4028		
100" Manual Pull-Down Screen:	DS-3100PMG+		

