

DS5-XL

Massive 3D Made Simple

- Project fully immersive 3D movies, sport and TV
- Easy connectivity Digital HDMI
- Lights on viewing 2800 ANSI Lumens
- Convenient audio from the built in speaker



DS5-XL includes:

DS5-XL projector 3D-XL 3D projector adapter ZD201 3D Glasses











Join the 3D revolution with fully immersive, life-size projection!

Prepare yourself for life-size 3D games and movies! Designed for use with 3D broadcast signals; Sky 3D in the UK, Blu-ray 3D[™], Gaming PCs and 3D games from the Sony[®] PS3 or Microsoft[®] Xbox 360, the Optoma DS5-XL home entertainment projector, delivers this massive 3D experience right into your own home.

With the DS5-XL you can simply connect between a 3D source and your 3D-XL Ready DLP® projector to project fantastic, fully immersive 3D at sizes larger than 100" for the greatest home entertainment experience.

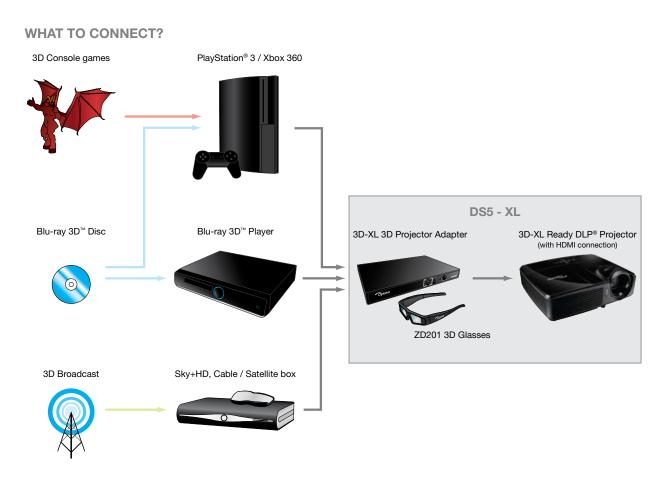

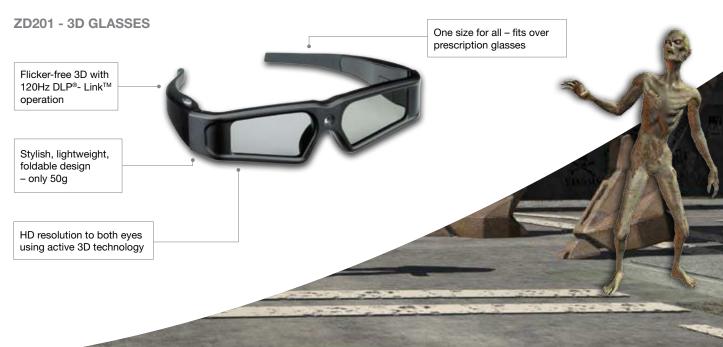

SIMPLE SETUP



*HDMI cable not included

3D VIEWING

Connect to 3D enabled devices such as 3D broadcast signals from Sky 3D in the UK, Blu-ray 3D[™], Gaming PCs and 3D games from the Sony® PS3 or Microsoft® Xbox 360, to project fully immersive 3D movies, sport and TV with the included 3D-XL 3D Projector Adapter.

HDMI cable*



BRIGHTNESS WHERE IT MATTERS

Project even when there is ambient light in the room as the DS5-XL projector delivers an impressive 2800L ensuring everyone can clearly see the projected image, even during the day.

DIGITAL CONNECTIVITY

Simple and easy – connect using a HDMI cable for a digital audio and video connection to your projector giving you a clear projected image with sound.



AUDIO CAPABILITY

Listen to movies, sport commentary or TV shows conveniently with the built in speaker. Or for a greater sound experience hook up external speakers to your projector using the audio out connection.

PROJECTION THAT LASTS

Bright colours and fantastic image quality are guaranteed for an amazing 5 years after purchase - giving piece of mind that the technology inside your Optoma projector will not fade or degrade.

HDMI cable*








COST SAVING & ENVIRONMENTALLY FRIENDLY

Reduce the number of lamp changes with a lamp life performance of up to 6000 hours - on average twice the life expectancy of other lamps on the market. The DS5-XL projector has an easy access lamp, which helps to keep maintenance to a minimum, as the projector can remain in situ.



We know that improving our products is the best way to reduce our impact on the environment. That's why at Optoma, we design our products to have a long usable life, use fewer materials, ship with the minimum packaging and be free of all possible toxic substances. Naturally, energy efficiency and being recyclable are built in at the design stage. With each new product, we strive towards minimising our environmental impact. For full details of Optoma Project Green please visit our website: www.optoma.co.uk

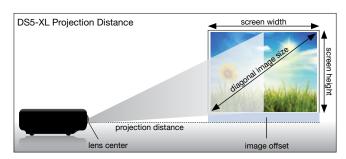

DS5-XL Projection Distance (4:3 Aspect Ratio)										
Projection Distance (m)	Max Screen Width (m)	Min Screen Width (m)	Max. Screen Height (m)	Min. Screen Height (m)	Min Diagonal Image Size (m)	Max Diagonal Image Size (m)	Min Diagonal Image Size (inch)	Max Diagonal Image Size (inch)	Max. Image Offset (m)	
2.00 2.50	1.02 1.27	0.92 1.15	0.76 0.95	0.69 0.87	1.15 1.44	1.27 1.59	45.40 56.75	50.01 62.51	0.11 0.14	
3.00	1.52	1.38	1.14	1.04	1.73	1.91	68.10	75.01	0.17	
4.00 6.00 8.00	2.03 3.05 4.06	1.84 2.76 3.69	1.53 2.29 3.05	1.39 2.08 2.77	2.31 3.46 4.61	2.54 3.81 5.08	90.80 136.19 181.59	100.01 150.02 200.03	0.23 0.34 0.46	

For guide purposes only

DS5-XL PROJECTOR SPECIFICATIONS

Native Resolution	SVGA 800 x 600				
Max Supported Resolution	UXGA (1600 x 1200)				
Display Technology	Single 0.55" SVGA DC3 DMD chip DLP® Technology				
	by Texas Instruments				
Brightness - BRIGHT mode ¹	2800 ANSI Lumens				
Contrast Ratio	5000:1				
Lamp Life ²	6000/5000 (ECO/BRIGHT mode)				
Noise Level	28dB (ECO mode)				
Weight / Dimensions (W x D x H)	2.2 kg / 280 x 230 x 77mm				
Inputs	HDMI (HDCP) - audio supported				
	2 x 15 Pin D-Sub VGA Component via adaptor				
	S-Video 4 Pin Mini Din				
	Composite RCA				
	3.5mm Audio Mini Jack				
	USB (remote mouse)				
Control	RS232 - 9 Pin D-sub				
OUTPUT	15 Pin D-Sub VGA				
	3.5mm Audio Mini Jack				
Audio	2W Speaker				
Aspect Ratio	4:3 Native, 16:9 Compatible				
On Screen Display	18 Languages: English, German, French, Italian, Spanish,				
	Portuguese, Polish, Dutch, Russian, Finnish, Swedish,				
	Greek, Norwegian/Danish, Hungarian, Czech, Turkish,				
	Arabic & Farsi				
Video Compatibility	PAL SECAM 576i/p, NTSC 480i/p, HD 720p/1080i/1080p				
Uniformity	85%				
Displayable Colours	1073.4 Million				
Horizontal Scan Rate	15.3 - 91.1kHz				
Vertical Scan Rate	24 - 85Hz				
Projection Lens	F/2.51~2.69; f=21.95~24.18mm, 1.1x Manual Zoom				
Projection Distance	1.2 - 12m				
Image Size	0.69m - 7.62m (27.24" to 300.04") Diagonal 4:3				
Throw Ratio	1.97 - 2.17:1 (Projection Distance:Image Width)				
Keystone Correction	± 40° Vertical				
Operating Conditions	Operating: 5 - 40°C, 85% Humidity (Max), 3000m Altitude				
	(Max)				
Power Supply	100 - 240V, 50 - 60Hz				
Power Consumption	233W BRIGHT mode < 0.5W Standby mode				
	207W ECO mode < 0.5 Standby mode				
Security	Security Bar, Kensington Lock Port, Password Protection				
Standard Accessories	AC Power Cord, VGA Cable, Full Function Remote,				
	Batteries x 2, Quick Start Guide, CD User Manual,				
	Warranty Card				
RoHS	Compliant				
Lamp Warranty	6 months or 1000 hours - whichever comes sooner				
Warranty	Warranty may vary by country. Please see				
•	www.optomaeurope.com or ask your local supplier				
	for details				
Colour Guarantee ³	5 Years				
Imager Guarantee ⁴	5 Years				
3D Support	120Hz frame sequential 3D for resolutions up to 720p.				
os capport	60Hz field sequential 3D for resolutions up to 480i				
	Requires Optoma DLP® Link TM ZD201 glasses				
3D Viewing	rioquiros optoma DEL Ellin ZDZUT glassos				
3D Viewing	- 1 pair included				
	- 1 pair included. Support for 3D TV broadcast systems (SKV in the UK)				
3D Viewing 3D Compatibility	Support for 3D TV broadcast systems,(SKY in the UK),				
	<u> </u>				

ZD201 3D GLASSES SPECIFICATIONS

3D Refresh rate	120Hz (60Hz / eye)
Dimensions (W x D x H)	172 x 166 x 40 (mm)
Weight	50g
Power	1x CR2032 battery
Battery Life	Up to 70 Hours
Range	Up to 20M (Dependent on projected Image)
Operating Conditions	Operating: 5°C - 45°C
Storage Humidity	≤90%

3D-XL SPECIFICATIONS

Native 3D Output resolution	HD Ready 720p120
Maximum Output resolution	Full HD 1080p (L/R view selectable)
INPUTS	2 x HDMI 1.4a (HDCP) - audio supported
OUTPUTS	HDMI 1.3 (HDCP) - audio supported
CONTROL	RS232 9-Pin D-Sub 3-PIN miniDIN (VESA Sync)
Aspect Ratio	16:9 Native, 4:3 Compatible
2D Video Compatibility	PAL SECAM 576i/p, NTSC 480i/p, HD 720p/1080i/1080p
3D Video Compatibility	Side-by-Side:1080i50, 1080i60
	Frame-pack:1080p24, 720p50, 720p60
	Over-Under: 1080p24, 720p50, 720p60
Power Supply	100 - 240V, 50 - 60Hz (UK/EU Compatible)
Power Consumption	20W (<1W standby)
Weight / Dimensions (W x D x H)	1080g / 280mm x 190mm x 30mm
Operating Conditions	Operating: 5 - 35°C, 85% Humidity (Max), 5000m Altitude (Max)
Standard Accessories	UK/EU Power Adapter, Quick Start Guide, CD User
	Manual, WEEE Card
RoHS	Compliant
Warranty	Warranty may vary by country. Please see
	www.optoma.co.uk or ask your local supplier for details

EASY TO USE REMOTE CONTROL

DS5-XL Remote Control

- 1 Power
- 2 Enable Mouse Control
- 3 Mouse Control
- 4 Vertical Keystone Correction
- 5 Volume Control
- 6 Direct Input Source Selection
- 7 Freeze
- 8 AV Mute
- 9 Page Up/Down Control
- 10 3D Control

DS5-XL Connections

- 11 Audio In
- 12 HDMI (audio supported)
- 13 S-Video
- 14 VGA 1 Component
- **15** RS232
- 16 USB (Remote Mouse)
- 17 Audio Out
- 18 Video
- **19** VGA 2 20 VGA Out
- 21 Kensington™ Lock



Exceptional Connectivity / Multiple Terminals





