### LightStream<sup>™</sup> 3,300 Lumens SVGA Projector



PJD5151



The ViewSonic LightStream<sup>™</sup> Projector PJD5151, the best price-performance projector, is designed with elegant style and impressive image performance. This sleek projector makes a big statement with its elegant curves and light beam shape. It's thoughtful design, which includes a tactile keypad, instructional icons, and son on, also presents an intuitive and user-friendly interface. Exclusive SuperColor<sup>™</sup> technology offers a 6-Segment Color Wheel - 15%+ color brightness, for true-to-life image projection. The 3,300-lumen lamp with a 22,000:1 contrast ratio is for clearer and brighter images. From small meeting rooms to small classrooms, LightStream<sup>™</sup> Projector PJD5151 projects full brightness and colors. It also supports 2 x VGA input, Mini USB and RS232 control ports.

- SVGA 800 x 600 DLP projector Up to 3,300 ANSI lumen brightness and 22,000:1 contrast ratio
- SuperColor™ technology with 15%+ color brightness delivers superior, richer, true-to-life colors
- Smart restart, auto power on/off and quick power off without waiting
- Smart remote control with mouse function, My button for hotkey, 1-to-8 projector code control, etc.
- Flexible setup options include Keystone and 5 color modes

## SuperColor<sup>™</sup>: Best in Class Color Accuracy

ViewSonic's proprietary SuperColor<sup>™</sup> Technology offers a wider color range than conventional DLP projectors for true-to-life color performance in any light. SuperColor<sup>™</sup> 6-Segment Color Wheel

maximizes brightness Increased by 15% or more with the highest color saturation over others in the same class.





# Smart Restart Instant reactivation during presentation

With Smart Restart, the projector automatically enters a 3-minute standby mode when it is idle and turns down the projection to a power-saving 30% brightness. During standby mode, you can quickly and conveniently reactivate the projector for continued use without waiting for a complete power cycle.



# Auto Power On Instant activation upon signal connection

With Auto Power On enabled, once a VGA or HDMI cable is connected and signal detected, LightStream<sup>™</sup> projectors will power on automatically with effortless start-up.





## **Auto Power Off**

Power Saving: Every Time When no signal is detected, the projector will automatically power off after a user-defined amount of time – another feature to save electricity cost, reduce energy consumption and extend the life of the projector.

Sleep Timer: Every Day Forgetting to shut off projectors is a common occurrence, particularly in public classrooms or meeting rooms. The sleep timer allows administrators to set up a timer to shut down the projector after a period of inactivity.



## **Quick Power Off Leave without the wait**

Quick shut down in seconds because of smart electric and lamp designs are time-saving improvements that lead towards efficiency and energy savings.



## **Mouse-Like Control Handy operation**

Mouse left and right-click buttons are provided on the remote control so users can use a single remote control to navigate through presentation slides or control the connected PC.



## "My Button" Setup your favorite hotkey

Finding a function on a remote control or through the on-screen menu can be time-consuming. The "My Button" button on the remote control is a programmable shortcut button that can be user-programmed to launch a commonly used or desired function.



## **Keystone Distorted image correction**

The PJD5151 can correct and adjust vertical distorted images into a more symmetric shape.



## **Color Mode Best view modes**

Providing 5 view modes for different scenarios, users can choose one fit mode at once for best view according to the projection environment. These 5 modes are:

- Brightest Mode for environments where extra-high brightness is required
- Dynamic Mode for presentations under daylight environment and text content
- Standard Mode for matching PC or NB color
- ViewMatch Mode for general viewing
- Movie Mode for watching movies with better saturation in a dark environment

#### Normal

### ViewMatch® Color Mode







## **Top Lamp Door**

The thoughtfully designed lamp door makes lamp maintenance and replacement easy. Located at the top of the projector, there's no need to dismantle the projector, even if it's hanging from the ceiling, to access the lamp. This user-friendly design saves time and effort for maintenance personnel in businesses and schools, and is easy enough that just about anyone can do it.



# Presenter Timer Reminder for time management

An embedded on-screen timer assists presenters to manage their times to avoid presentation overruns that cause potential delays during scheduled sessions.




## **Tactile Keypads**

Tactile Keypads reflect LightStream<sup>™</sup> Projectors' detailed design to the most LightStream<sup>™</sup> Projectors' tactile keypad is raised with concave buttons that assist in making projector set up easier in dark environments without illumination. Also, Touching and feeling the non-flat keypads can be also interesting.



# Patterns and Templates World's first projector-embedded teaching tools

Patterns are built-in templates such as tables, grids, worksheets, and charts on which teachers and students can draw when using an interactive projection. The results are fast illustrations with straight lines every time.

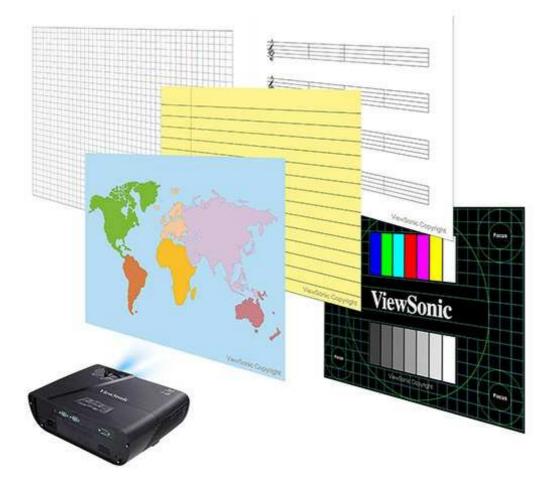

### 3D Ready / 120Hz Refresh Rate Powered by DLP® Link Technology Exciting 3D visual effects

With support for DLP® Link technology, you´ll have amazing 3D capabilities at your disposal. All that's required to unlock 3D capabilities on the ViewSonic LightStream<sup>™</sup> 3D-ready projectors are ViewSonic 3D active shutter glasses, 3D content, and a 3D-enabled video card. Unleash a vivid 3D experience with the ViewSonic LightStream<sup>™</sup> projectors today.





### **Technical Specifications**

PRODUCT SPECIFICATION

Resolution

| Impletes (Max)22.0001Contract (Max)2.0001Lamp Hour (Normal / Sleep5000/10000 hrsMode)  |                | Brightness (ANSI Lumens) | 3300 lm                                 |
|--|----------------|--------------------------|---|
| Lamp Hour (Normal / Sleep5000/10000 hrs<br>Mode)Mode).196 ~ 2.15<br>~ Tele)Optical Zoom.1.1xDigital Zoom0.8X~2.0XScreen Size30" ~ 300" DiagonalProjection Offset1.20%+7.5%Display Colours1.0 "Illion Colors (30 bits per color)Keystone+ 4.40" (Vertical)Noise min (Normal / Eco)32 dB / 27 dBSpeakerN/ACONNECTIVITYHDMI InVGA-in2Composite Input1 (share with RGB)SvideoN/AAudio-in (3.5mm)N/AAudio-in (3.5mm)N/AAudio-in (3.5mm)N/AUSB Type AN/AUSB Type AN/AMin USB1Microphone in (3.5mm)N/ASD Card readerN/ACONNECTIVITYS22 (9 pin)NA1Network Mangment (LAN<br>cable)N/ALIVENSIONS AND<br>POWER Foucer TriggerN/APOWERDimension (WADH)316 rmm (W) x 228mm (D) x 103.7 mm (H)<br>12.44" (M) X 8 98" (D) x 4.08" (H)<br>NA X 8 98" (D) x   |                | -                        |   |
| Mode)   Throw Ratio in Meters (Wid Jose 2.15     Throw Ratio in Meters (Wid Jose 2.15     Tele)   0ptical Zoom     Digital Zoom   0.8X~2.0X     Screen Size   30° -300° Diagonal     Projection Offset   120%+/-5%     Display Colours   1.07 Billion Colors (30 bits per color)     Keystone   +/-40° (Vertical)     Noise min (Mormal / Eco)   326 J2 7 dB     Speaker   N/A     INPUT   Component input     Solde min (Moral)   1 (share with RGB)     Svideo   N/A     Composite Input   N/A     Audio-in (RCA pair)   N/A     USB Type A   N/A     USB Type B   N/A     USB Type B   N/A     USB Type B   N/A     Mini USB   1     Microphone in (3.5mm)   N/A     N/A   N/A     Mini USB   1     NA   N/A     USB Type B   N/A     Mini USB   1     N/A   N/A     Display Colur (3.5mm)   N/A     NA   N/A   |                |                          |   |
| - Tele)   Optical Zoom   1.1x     Optical Zoom   0.8X~2.0X     Screen Size   30° - 300° Diagonal     Projection Offset   120%+//5%     Display Colours   1.07 Billion Colors (30 bits per color)     Ksystone   +/4 0° (Vertical)     Noise min (Normal / Eco)   32 dB / 27 dB     Speaker   N/A     INPUT   1 (share with RGB)     Component Input   1 (share with RGB)     S-Video   N/A     Composite Input   N/A     Audio-in (RCA pair)   N/A     VISB Type A   N/A     USB Type A   N/A     Mini USB   1     Microphone in (3.5mm)   N/A     SD Card reader   N/A     NVA   N/A     CONTROL   R5232 (9 pin)   1     Network Mangment (LAN<br>cable)   N/A     212V Power Trigger   N/A     POWER   Dimension (WaDxH)   316 mm (W) x 228mm (D) x 103.7 mm (H)<br>12.44" (W) x 8.98" (D) x   |                |                          | 5000/10000 ms                           |
| Digital Zoom0.8X-2.0XScreen Size30" -300" DiagonalProjection Offset120%+7-5%Display Colours1.07 Billion Colors (30 bits per color)Keystone+7-40" (Vertical)Noise min (Normal / Eco)32 dB / 27 dBSpeakerN/ACONNECTIVITYHDMI InVGA.in2Component Input1 (share with RGB)S-VideoN/AComposite InputN/AAddio-in (3.5mm)N/AAddio-in (3.5mm)N/AAddio-in (3.5mm)N/AUSB Type AN/AUSB Type BN/AMiri USB1Microphone in (3.5mm)N/ASD Card readerN/AAddio-out (3.5mm)N/ASD Card readerN/APOWERR5232 (9 pin)1Network Mangment (LAN<br>212 V Power TriggerN/APOWERDimension (WXDXH)316 mm (W) x 228mm (D) x 103.7 mm (H)<br>12.44" (W) x 8.98" (D) x 4.08" (H)<br>N 4.08" (H)<br>22.45% (H) x 8.98" (D) x 4.08" (H)POWERSPower Source100-240Vac Sol60Hz (Auto Switching)<br>Power SourcePOWERSPower cord1  |                |                          | 1.96 ~ 2.15                             |
| Screen Size30° ~300° DiagonalProjection Offset120%+/5%Display Colours1.07 Billion Colors (30 bits per color)Keystone>24 DP / 27 dBNoise min (Normal / Eco)32 dB / 27 dBSpeakerN/ACONNECTIVITYHDMI InN/AVGA-in2Component Input1 (share with RGB)S-VideoN/AComposite InputN/AAddio-in (3.5mm)N/AUSB Type BN/AUSB Type BN/AUSB Type BN/AMini USB1Addio-in (3.5mm)N/AUSB Type BN/AUSB Type Cord readerN/AOUTPUTVGA-outN/AAdulo-out (3.5mm)N/ADOTROLR5232 (9 pin)1NEXEWORK Mangment (LAN<br>cable)<br>12V Power TriggerN/APOWERDimension (WdDxH)316 mm (W) x 228mm (D) x 103.7 mm (H)<br>12.44" (W) x 8.98" (D) x 4.08" (H)Net WeightA58 Ibs / 2.2 kpsPower Source100~240Vac 50/60Hz (Auto Switching)<br>Power SourcePOWERSPower cord1  |                | Optical Zoom             | 1.1x                                    |
| Projection Offset120%+/5%Display Colours1.07 Billion Colors (30 bits per color)<br>KeystoneNoise min (Normal / Eco)32 dB / 27 dBNoise min (Normal / Eco)32 dB / 27 dBNAVGA-inCONNECTIVITYHDMI InVGA-in2Composite Input1 (share with RGB)S-VideoN/AAduio-in (RCA pair)N/AAudio-in (RCA pair)N/AUSB Type AN/AUSB Type BN/AMicrophone in (3.5mm)N/ASD Card readerN/AOUTPUTVGA-outCONNECTIVITYVGA-out (3.5mm)NAN/AAudio-uut (3.5mm)N/AN/AN/ADiscophone in (3.5mm)N/AN/AN/ADUPUTVGA-out (3.5mm)CONNECTIVITYVGA-out (3.5mm)N/AN/AAudio-out (3.5mm)N/AN/AN/ADUPUTVGA-out (LAN<br>Audio-out (3.5mm)N/AN/AAudio-out (3.5mm)N/AN/AN/AAudio-out (3.5mm)N/AN/AN/ADUPUERDimension (WxDxH)DIPUENDimension (WxDxH)N/AN/AN/A100-240Vac 50/60Hz (Auto Switching)POWERPower ConsumptionACCESSORIESPower cordPOWERPower cordNA1   |                | Digital Zoom             | 0.8X~2.0X                               |
| Display Colours 1.07 Billion Colors (30 bits per color)   Kaystone +/- 40° (Vertical)   Noise min (Normal / Eco) 32 dB / 27 dB   Speaker N/A   INPUT HDMI In   VGA-in 2   Component Input 1 (share with RGB)   S-Video N/A   Composite Input 1 (share with RGB)   S-Video N/A   Audio-in (RCA pair) N/A   USB Type A N/A   USB Type B N/A   Minr USB Type B N/A   Microphone in (3.5mm) N/A   SD Card reader N/A   VGA-out N/A   Audio-out (3.5mm) N/A   N/A N/A   USB Type B N/A   NA N/A   VGA-out N/A   Audio-out (3.5mm) N/A   SD Card reader N/A   N/A N/A   CONNECTIVITY VGA-out   N/A N/A   SUPOPUT N/A   CONNECTIVITY VGA-out   N/A N/A   SUPOPUT N/A   CONNECTIVITY VGA-out   N/A N/A   SUPOPUT N/A   CONNECTIVITY <th></th> <th>Screen Size</th> <th>30" ~300" Diagonal</th>   |                | Screen Size              | 30" ~300" Diagonal                      |
| Keystone+/- 40° (Vertical)<br>32 2B / 27 dB<br>N/AINPUT<br>CONNECTIVITYHDMI InN/AVGA-in2Component Input1 (share with RGB)<br>S-VideoS-VideoN/AComposite InputN/AAudio-in (3.5mm)N/AAudio-in (3.5mm)N/AUSB Type AN/AUSB Type BN/AMini USB1Microphone in (3.5mm)N/AOUTPUT<br>CONNECTIVITYVGA-outMini USB1Microphone in (3.5mm)N/ANAN/AAudio-out (3.5mm)N/ADORNECTIVITYVGA-outMicrophone in (3.5mm)N/ANAN/ADimension (WADH)1POWERDimension (WADH)DIMENSIONS AND<br>POWER Consumption316 mm (W) x 228mm (D) x 103.7 mm (H)<br>12.44" (W) x 8.98" (D) x 4.08" (H)<br>N/A cable)<br>12 V Power TriggerDIMENSIONS AND<br>POWER Consumption316 mm (W) x 228mm (D) x 10.3.7 mm (H)<br>12.44" (W) x 8.98" (D) x 4.08" (H)<br>NA cable)<br>20 W Max.SUPPLIED<br>ACCESSORIESPower consumptionSUPPLIED<br>ACCESSORIESPower consumption  |                | Projection Offset        | 120%+/-5%                               |
| Noise min (Normal / Eco)32 dB / 27 dBSpeakerN/AINPUT<br>CONNECTIVITYHDMI In<br>VGA.inN/AVGA.in2Component Input1 (share with RGB)S-VideoN/AComposite InputN/AAudio-in (3.5 mm)N/AAudio-in (RCA pair)N/AUSB Type BN/AMini USB1Microphone in (3.5 mm)N/ASD Card readerN/AVGA-outN/AAudio-ut (3.5 mm)N/ASD Card readerN/AVGA-outN/AAudio-ut (2.5 mm)1Network Mangment (LAN<br>cable)N/AI2V Power TriggerN/APOWERDimension (WXDXH)316 mm (W) x 228mm (D) x 103.7 mm (H)<br>12.44" (W) x 8.98 " (D) x 4.08" (H)Net Weight4.85 lbs / 2.2kgsPower Consumption260 W Max.SUPPLIED<br>ACCESSORIESPower cord1  |                | Display Colours          | 1.07 Billion Colors (30 bits per color) |
| NPUT<br>CONNECTIVITY Speaker N/A   INPUT<br>CONNECTIVITY HDMI In<br>VGA-in N/A   VGA-in 2   Component Input 1 (share with RGB)   S-Video N/A   Composite Input N/A   Audio-in (3.5mm) N/A   USB Type A N/A   USB Type B N/A   USB Type B N/A   Mini USB 1   Microphone in (3.5mm) N/A   DCONNECTIVITY VGA-out   Audio-out (3.5mm) N/A   Audio-out (3.5mm) N/A   Audio-out (3.5mm) N/A   Mixerophone in (3.5mm) N/A   DCONNECTIVITY VGA-out<br>Audio-out (3.5mm) N/A   N/A N/A N/A   CONNECTIVITY VGA-out<br>Audio-out (3.5mm) N/A   Difference N/A N/A   CONTROL RS232 (9 pin)<br>N/A N/A   POWER Dimension (WxDxH) 100-240/00.50/00.10.3.7mm (H)<br>12.44" (W) x 8.98" (D) x 4.08" (H)<br>X-4.08" (H)   Net Weight<br>Power Source 316 mm (W) x 228mm (D) x 10.3.7 mm (H)<br>12.44" (W) x 8.98" (D) x 4.08" (H)   Net Weight<br>Power Source 100-240/03.50/06H2 (Auto Switching)<br>20 W Max.   |                | Keystone                 | +/- 40° (Vertical)                      |
| INPUT<br>CONNECTIVITY HDMI In N/A<br>VGA-in 2<br>Component Input 1 (share with RGB)<br>S-Video N/A<br>Composite Input N/A<br>Audio-in (3.5mm) N/A<br>Audio-in (RCA pair) N/A<br>USB Type A N/A<br>USB Type B N/A<br>Mini USB 1 1<br>Microphone in (3.5mm) N/A<br>SD Card reader N/A<br>VGA-out N/A<br>CONNECTIVITY VGA-out N/A<br>Audio-out (3.5mm) N/A<br>SD Card reader N/A<br>CONNECTIVITY VGA-out N/A<br>Audio-out (3.5mm) N/A<br>SD Card reader N/A<br>DIMENSIONS AND RS232 (9 pin) 1<br>Net Work Mangment (LAN N/A<br>cable) 12V Power Trigger N/A<br>DIMENSIONS AND Dimension (WXDXH) 316 mm (W) x 228mm (D) x 103.7 mm (H)<br>12.44" (W) x 8.98 " (D) x 4.08" (H)<br>Net Weight 4.85 lbs / 2.2kgs<br>Power Consumption 200 Max.  |                | Noise min (Normal / Eco) | 32 dB / 27 dB                           |
| CONNECTIVITYHDMI InN/AVGA-in2Component Input1 (share with RGB)S-VideoN/AComposite InputN/AAudio-in (3.5mm)N/AAudio-in (GA pair)N/AUSB Type AN/AUSB Type BN/AMini USB1Microphone In (3.5mm)N/ASD Card readerN/AVGA-outN/AAudio-ut (3.5mm)N/ANAN/AUSPUTVGA-outCONTROLR5232 (9 pin)Network Mangment (LAN<br>cable)N/A12V Power TriggerN/ADimension (WxDxH)316 mm (W) x 228mm (D) x 103.7 mm (H)<br>12.44" (W) x 8.98 " (D) x 4.08" (H)Net Weight<br>Power Source4.85 lbs / 2.2kgsPower Consumption260 W Max.SUPPLIED<br>ACCESSORIESPower cord11   |                | Speaker                  | N/A                                     |
| VGA.in 2<br>Component Input 1 (share with RGB)<br>S-Video N/A<br>Composite Input N/A<br>Audio-in (3.5mm) N/A<br>Audio-in (RCA pair) N/A<br>USB Type A N/A<br>USB Type B N/A<br>Mini USB 1<br>N/A<br>Mini USB 1<br>N/A<br>SD Card reader N/A<br>CONNECTIVITY VGA-out N/A<br>Audio-out (3.5mm) N/A<br>SD Card reader N/A<br>CONTROL RS232 (9 pin) 1<br>Network Mangment (LAN<br>cable) 12V Power Trigger N/A<br>Dimension (WxDXH) 316 mm (W) x 228mm (D) x 103.7 mm (H)<br>12.44" (W) x 8.98" (D) x 4.08" (H)<br>Net Weight 4.85 lbs / 2.2kgs<br>Power Consumption 260 W Max.<br>SUPPLIED<br>ACCESSORIES Power cord 1  | INPUT          |                          |   |
| Component Input1 (share with RGB)S-VideoN/AComposite InputN/AAudio-in (3.5mm)N/AAudio-in (RCA pair)N/AUSB Type AN/AUSB Type BN/AMini USB1Microphone in (3.5mm)N/ASD Card readerN/AVAAudio-out (3.5mm)N/AN/AAudio-out (3.5mm)N/ASD Card readerN/AVGNNECTIVITYVGA-outN/AN/AAudio-out (3.5mm)1Network Mangment (LAN<br>cable)N/AN/AN/APOWERDimension (WXDXH)316 mm (W) x 228mm (D) x 103.7 mm (H)<br>12.44" (W) x 8.98" (D) x 4.08" (H)<br>12.44" (W) x 8.98" | CONNECTIVITY   | HDMI In                  | N/A                                     |
| S-VideoN/AComposite InputN/AAudio-in (3.5mm)N/AAudio-in (RCA pair)N/AAudio-in (RCA pair)N/AUSB Type AN/AUSB Type BN/AMini USB1Microphone in (3.5mm)N/ASD Card readerN/AVGA-outN/AAudio-out (3.5mm)N/AN/AN/ACONTROLRS232 (9 pin)RS232 (9 pin)1Network Mangment (LAN<br>cable)N/ADImension (WXDXH)316 mm (W) x 228mm (D) x 103.7 mm (H)<br>12.44" (W) x 8.98 " (D) x 4.08" (H)Net Weight4.85 lbs / 2.2kgsPower Source100-240Vac 50/60Hz (Auto Switching)<br>260 W Max.SUPPLIEDPower cord1  |                | VGA-in                   | 2                                       |
| Composite InputN/AAudio-in (3.5mm)N/AAudio-in (RCA pair)N/AAudio-in (RCA pair)N/AUSB Type AN/AUSB Type BN/AMini USB1Microphone in (3.5mm)N/ASD Card readerN/AVGA-outN/AAudio-out (3.5mm)N/AN/AN/ADUTPUTVGA-outAudio-out (3.5mm)N/AN/AN/AAudio-out (3.5mm)N/AN/AN/ADimension (WXDXH)1Dimension (WXDXH)316 mm (W) x 228mm (D) x 103.7 mm (H)<br>12.44" (W) x 8.98 " (D) x 4.08" (H)<br>12.44" (W) x 8.98 " (D) x 4.08" (H)DIPUELEDPower Consumption1   |                | Component Input          | 1 (share with RGB)                      |
| Audio-in (3.5mm)N/AAudio-in (RCA pair)N/AUSB Type AN/AUSB Type BN/AMini USB1Microphone in (3.5mm)N/ASD Card readerN/AAudio-out (3.5mm)N/AAudio-out (3.5mm)N/ACONNECTIVITYVGA-out<br>Audio-out (3.5mm)N/AN/ADUTPUTN/ACONNECTIVITYUGA-out<br>Audio-out (3.5mm)N/AN/ADimension (WXDXH)1Dimension (WXDXH)316 mm (W) x 228mm (D) x 103.7 mm (H)<br>12.44" (W) x 8.98" (D) x 4.08" (H)Net Weight<br>Power Consumption4.85 lbs / 2.2kgs<br>Power Source<br>Power ConsumptionSUPPLIED<br>Power Consumption1  |                | S-Video                  | N/A                                     |
| Audio-in (RCA pair)N/AUSB Type AN/AUSB Type BN/AMini USB1Microphone in (3.5mm)N/ASD Card readerN/AVGA-outN/AAudio-out (3.5mm)N/AN/AN/ACONTROLRS232 (9 pin)Network Mangment (LAN<br>cable)N/AIVENSIONS AND<br>POWERDimension (WxDxH)IMENSIONS AND<br>POWERDimension (WxDxH)SUPPLIED<br>RCCESSORIESPower cordINPLIEDPower cordINPLIEDInplienINPLIEDPower cordINPLIEDPower cordINPLIEDInplienINPLIEDInplienINPLIEDInplienINPLIEDInplienINPLIEDInplienINPLIEDInplienINPLIEDInplienINPLIEDInplienINPLIEDInplienINPLIEDInplienINPLIEDInplienINPLIEDInplienINPLIEDInplienINPLIEDInplienINPLIEDInplien </td <td></td> <td>Composite Input</td> <td>N/A</td>   |                | Composite Input          | N/A                                     |
| USB Type AN/AUSB Type BN/AMini USB1Microphone in (3.5mm)N/ASD Card readerN/AVGA-outN/AAudio-out (3.5mm)N/ARS232 (9 pin)1N/AN/AN/AN/ADimension (WxDxH)16 mm (W) x 228mm (D) x 103.7 mm (H)<br>12.44" (W) x 8.98 " (D) x 4.08" (H)Net Weight4.85 lbs / 2.2 kgsPOWERPower ConsumptionPOWERPower cord11  |                | Audio-in (3.5mm)         | N/A                                     |
| USB Type BN/AMini USB1Microphone in (3.5mm)N/ASD Card readerN/AVGA-outN/AAudio-out (3.5mm)N/ACONTROLRS232 (9 pin)1Network Mangment (LAN<br>cable)N/AI2V Power TriggerN/ADimension (WxDxH)316 mm (W) x 228mm (D) x 103.7 mm (H)<br>12.44" (W) x 8.98 " (D) x 4.08" (H)Net Weight4.85 lbs / 2.2kgsPower Source100~240Vac 50/60Hz (Auto Switching)<br>260 W Max.SUPPLIEDPower cord1   |                | Audio-in (RCA pair)      | N/A                                     |
| Mini USB<br>Microphone in (3.5mm)<br>SD Card reader1<br>N/A<br>N/ACONTPUT<br>CONNECTIVITYVGA-out<br>Audio-out (3.5mm)N/A<br>N/ACONTROL<br>DIMENSIONS AND<br>POWERRS232 (9 pin)<br>Network Mangment (LAN<br>cable)<br>12V Power Trigger1<br>N/A<br>N/ADIMENSIONS AND<br>POWERDimension (WxDxH)316 mm (W) x 228mm (D) x 103.7 mm (H)<br>12.44" (W) x 8.98 " (D) x 4.08" (H)<br>A.85 lbs / 2.2kgs<br>Power Source<br>Power Consumption316 mm (W) x 228mm (D) x 103.7 mm (H)<br>22.44" (W) x 8.98 " (D) x 4.08" (H)<br>A.85 lbs / 2.2kgsSUPPLIED<br>ACCESSORIESPower cord1   |                | USB Type A               | N/A                                     |
| Microphone in (3.5mm)<br>SD Card readerN/A<br>N/AOUTPUT<br>CONNECTIVITYVGA-out<br>Audio-out (3.5mm)N/A<br>N/ACONTROL<br>CONTROLRS232 (9 pin)<br>Network Mangment (LAN<br>cable)<br>12V Power Trigger1<br>N/A<br>N/ADIMENSIONS AND<br>POWERDimension (WxDxH)316 mm (W) x 228mm (D) x 103.7 mm (H)<br>12.44" (W) x 8.98 " (D) x 4.08" (H)<br>A.85 lbs / 2.2kgs<br>Power Source<br>Power Consumption316 mm (W) x 228mm (D) x 103.7 mm (H)<br>22.44" (W) x 8.98 " (D) x 4.08" (H)<br>A.85 lbs / 2.2kgs<br>Power Source<br>Power ConsumptionSUPPLIED<br>ACCESSORIESPower cord1  |                | USB Type B               | N/A                                     |
| SD Card readerN/AOUTPUT<br>CONNECTIVITYVGA-out<br>Audio-out (3.5mm)N/ACONTROLRS232 (9 pin)<br>Network Mangment (LAN<br>cable)<br>12V Power Trigger1<br>N/ADIMENSIONS AND<br>POWERDimension (WxDxH)316 mm (W) x 228mm (D) x 103.7 mm (H)<br>12.44" (W) x 8.98 " (D) x 4.08" (H)<br>Net Weight<br>Power Source<br>Power Consumption316 mm (W) x 228mm (D) x 103.7 mm (H)<br>12.44" (W) x 8.98 " (D) x 4.08" (H)<br>260 W Max.SUPPLIED<br>ACCESSORIESPower cord1  |                | Mini USB                 | 1                                       |
| OUTPUT<br>CONNECTIVITYVGA-out<br>Audio-out (3.5mm)N/ACONTROLRS232 (9 pin)<br>Network Mangment (LAN<br>cable)<br>12V Power Trigger1DIMENSIONS AND<br>POWERDimension (WxDxH)316 mm (W) x 228mm (D) x 103.7 mm (H)<br>12.44" (W) x 8.98 " (D) x 4.08" (H)<br>Net Weight<br>Power Source<br>Power ConsumptionSUPPLIED<br>ACCESSORIESPower cord1  |                | Microphone in (3.5mm)    | N/A                                     |
| CONNECTIVITYVGA-outN/AAudio-out (3.5mm)N/ACONTROLRS232 (9 pin)1Network Mangment (LAN<br>cable)N/AJ2V Power TriggerN/ADIMENSIONS AND<br>POWERDimension (WxDxH)316 mm (W) x 228mm (D) x 103.7 mm (H)<br>12.44" (W) x 8.98" (D) x 4.08" (H)Net Weight<br>Power Source<br>Power Consumption4.85 lbs / 2.2kgs<br>100~240Vac 50/60Hz (Auto Switching)<br>260 W Max.SUPPLIED<br>ACCESSORIESPower cord1  |                | SD Card reader           | N/A                                     |
| Audio-out (3.5mm)N/ACONTROLRS232 (9 pin)1Network Mangment (LAN<br>cable)N/ADIMENSIONS AND<br>POWERDimension (WxDxH)316 mm (W) x 228mm (D) x 103.7 mm (H)<br>12.44" (W) x 8.98 " (D) x 4.08" (H)DIMENSIONS AND<br>POWERDimension (WxDxH)316 mm (W) x 228mm (D) x 103.7 mm (H)<br>12.44" (W) x 8.98 " (D) x 4.08" (H)BUPPLIED<br>ACCESSORIESPower cord10~240Vac 50/60Hz (Auto Switching)<br>260 W Max.   | OUTPUT         |                          |   |
| CONTROLRS232 (9 pin)1Network Mangment (LAN<br>cable)N/A12V Power TriggerN/ADIMENSIONS AND<br>POWERDimension (WxDxH)316 mm (W) × 228mm (D) × 103.7 mm (H)<br>12.44" (W) × 8.98 " (D) × 4.08" (H)Net Weight<br>Power Source<br>Power Consumption4.85 lbs / 2.2kgs<br>100~240Vac 50/60Hz (Auto Switching)<br>260 W Max.SUPPLIED<br>ACCESSORIESPower cord1   | CONNECTIVITY   | VGA-out                  | N/A                                     |
| Network Mangment (LAN<br>cable)<br>12V Power TriggerN/ADIMENSIONS AND<br>POWERDimension (WxDxH)316 mm (W) x 228mm (D) x 103.7 mm (H)<br>12.44" (W) x 8.98 " (D) x 4.08" (H)Net Weight<br>Power Source<br>Power Source<br>Power Consumption4.85 lbs / 2.2kgs<br>100~240Vac 50/60Hz (Auto Switching)<br>260 W Max.SUPPLIED<br>ACCESSORIESPower cord1   |                | Audio-out (3.5mm)        | N/A                                     |
| Network Mangment (LAN<br>cable)N/AI2V Power TriggerN/ADIMENSIONS AND<br>POWERDimension (WxDxH)Simple Signer Source<br>Power Source<br>Power Consumption316 mm (W) x 228mm (D) x 103.7 mm (H)<br>12.44" (W) x 8.98" (D) x 4.08" (H)SUPPLIED<br>RCCESSORIESPower cordPower cord1   | CONTROL        | RS232 (9 pin)            | 1                                       |
| DIMENSIONS AND<br>POWERDimension (WxDxH)316 mm (W) x 228mm (D) x 103.7 mm (H)<br>12.44" (W) x 8.98 " (D) x 4.08" (H)Net Weight4.85 lbs / 2.2kgsPower Source100~240Vac 50/60Hz (Auto Switching)<br>260 W Max.SUPPLIED<br>ACCESSORIESPower cord1   |                | Network Mangment (LAN    | N/A                                     |
| POWERDimension (WxDxH)316 mm (W) x 228mm (D) x 103.7 mm (H)<br>12.44" (W) x 8.98" (D) x 4.08" (H)Net Weight4.85 lbs / 2.2kgsPower Source100~240Vac 50/60Hz (Auto Switching)Power Consumption260 W Max.SUPPLIED<br>ACCESSORIESPower cordPower cord1   |                | 12V Power Trigger        | N/A                                     |
| SUPPLIED   Power cord   1     ACCESSORIES   Power cord   1   | DIMENSIONS AND |                          |   |
| Power Source 100~240Vac 50/60Hz (Auto Switching)   Power Consumption 260 W Max.   SUPPLIED Power cord   ACCESSORIES Power cord   | POWER          | Dimension (WxDxH)        |   |
| Power Consumption 260 W Max.   SUPPLIED Power cord   ACCESSORIES Power cord  |                | Net Weight               | 4.85 lbs / 2.2kgs                       |
| SUPPLIED<br>ACCESSORIES Power cord 1   |                | Power Source             | 100~240Vac 50/60Hz (Auto Switching)     |
| ACCESSORIES Power cord 1   |                | Power Consumption        | 260 W Max.                              |
|  |                |                          |   |
| VGA cable 1  | ACCESSORIES    | Power cord               | 1                                       |
|  |                | VGA cable                | 1                                       |

|           | HDMI cable  | N/A  |
|-----------|---|--|
|           | Remote Control (with<br>batteries)<br>Cable cover | 1<br>N/A   |
|           |   |  |
|           | Quick Start Guide & CD                            | 1  |
|           | Carry bag   | N/A  |
| LANGUAGES | On Screen Display                                 | English, France, Spanish, Thai, Korea, Germany, Italian,<br>Russian, |
|           |   | Swedish, Dutch, Polish, Zech, Turkish, Portuguese,                   |
|           |   | Finnish, Indonesian,   |
|           |   | India, Arabic,,,   |
| WARRANTY  |   | **Warranty offered may differ from market to market                  |

#### **ViewSonic® Limited Warranty**

ViewSonic provides customers with the security of a manufacturers warranty against defected products. The type and duration of the applicable warranty service varies by product type, country of purchase and can also vary on an individual basis according to customer requirements agreed at time of purchase. The warranty will expire after the end of the warranty period.

