

# LightStream™ XGA 1024x768 Short Throw Projector

True-to-Life Color in Any Light\*

**PJD5350LS**



The ViewSonic® LightStream™ PJD5350LS value projector lets you experience true-to-life color in any lighting condition. Whether for classrooms, meeting rooms, or home theaters, ViewSonic LightStream projectors bring lesson plans, presentations, and movies to life with vivid colors and crisp images. Equipped with SuperColor™ technology and a high-brightness output, this projector strikes a perfect balance of color and light to deliver the ultimate in color accuracy without compromise. In addition to incredible screen performance, the PJD5350LS projector features a smart and intuitive design that includes a sleek white chassis, a programmable remote control, an easy-access top lamp door, and an optional cable management hood for reduced clutter. A short throw lens with a 0.6 throw ratio projects large images in small rooms. Delivering amazing lifelike color at an affordable price, ViewSonic's LightStream PJD5 series of projectors are the ideal multipurpose projection solution for any room.

#### **Key Features:**

**SuperColor™ technology**  
delivers superior, richer colors

**Short throw lens with 0.6 throw ratio**  
for larger images in smaller rooms

**Up to 3,200 ANSI lumen brightness**  
and 20,000:1 contrast ratio

**3D Blu-ray ready HDMI input**

**Choice of 5 view settings**  
for a variety of usage scenarios

#### **Designed for:**

**Education**


**Business**

**Home**

# LightStream™ XGA 1024x768 Short Throw Projector

**PJD5350LS**


Projection Distance		Screen Size (4:3 Diagonal)	
Inches	Meters	Inches	Meters
15	0.4	30	0.8
20	0.5	40	1.0
30	0.8	60	1.5
40	1.0	80	2.0
50	1.3	100	2.5
75	1.9	150	3.8
100	2.5	200	5.1
125	3.2	250	6.4
150	3.8	300	7.6

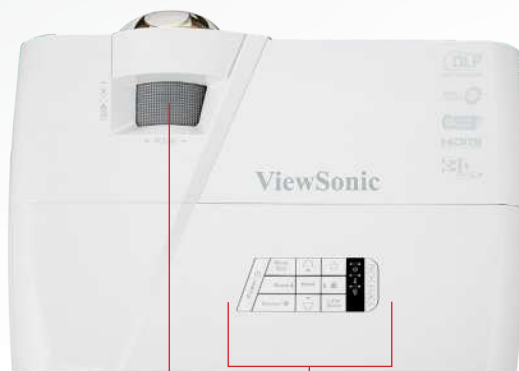

Focus Ring  
Control Panel



IR Remote Sensor  
Projection Lens

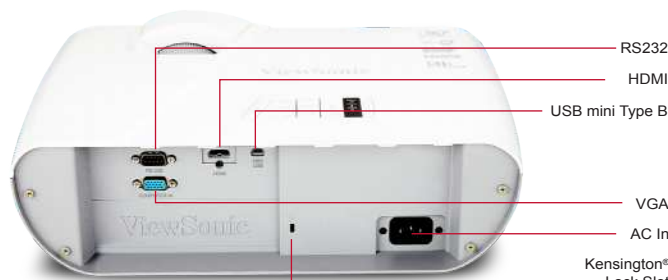

RS232  
HDMI  
USB mini Type B  
VGA  
AC In  
Kensington® Lock Slot

## Specifications

<b>DISPLAY</b>	Type	0.55" Digital Micromirror Device (DLP™)
	Resolution	1024 x 768 (native)
	Lens	fixed zoom / manual optical focus
	Keystone	Vertical (± 30°) / Horizontal (± 30°)
	Size	50 – 250 in. / 1.27 – 6.35 m (diagonal)
	Throw Distance	1.3 – 12.5 ft. / 0.4 – 3.8 m
	Throw Ratio	0.6:1
	Lamp	210 watt
	Light Life	4000 / 5000 / 10000 hours** (Normal / Eco-mode / DynamicEco™ Mode)
	Brightness	3200 lm
Contrast Ratio	20,000:1 (DynamicEco Mode)	
Aspect Ratio	4:3 (native), 16:9	
Color Depth	30 bits, 1.07B Color (10+10+10)	
<b>INPUT SIGNAL</b>	Computer and Video	NTSC M(3.58MHz), 4.43MHz, PAL (B, D, G, H, I, M, N, 60), SECAM (B, D, G, L, L1), SD 480i and 576i, ED 480p and 576p, HD 720p, 1080i, 1080p
	Frequency	Fh: 15–100KHz, Fv: 24–120Hz
<b>COMPATIBILITY</b>	PC	Up to 1600x1200
	Mac®	Up to 1600x1200 (may require MAC adapter)
<b>CONNECTOR</b>	Digital Input	HDMI 1.4 (x1)
	RGB Input	15-pin mini D-Sub (x1)
	USB	Mini type B (mouse control and maintenance)
	Control	RS232

<b>AUDIO</b>	Speaker	2W (x1)
<b>NOISE LEVEL</b>	Normal / Eco-mode	32 dB / 28 dB
<b>POWER</b>	Voltage	100–240VAC (Auto Switching), 50-60Hz (universal)
	Consumption	275W (max) / <0.5W (stand-by mode)
<b>CONTROLS</b>	Basic	Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source
	OSD	Display, Picture, Source, System Setup (Basic), System Setup (Advanced), Information (See user guide for full OSD functionality)
<b>OPERATING CONDITIONS</b>	Temperature	32–104° F (0–40° C)
	Humidity	10–90% (non-condensing)
	Altitude	0–10,000 ft (3,048m)
<b>DIMENSIONS (W x H x D)</b>	Physical	14.25 x 4.57 x 9.76 in. / 362 x 116 x 248 mm
	Packaging	18.31 x 12.4 x 6.5 in. / 465 x 315 x 165 mm
<b>WEIGHT</b>	Net	5.5 lb. / 2.5 kg
	Gross	8.6 lb. / 3.9 kg
<b>REGULATIONS</b>		CB, UL, cUL, FCC (including ICES-003), CE, UL-argentina, NOM, TUV-GS, GOST-R, SASO, Ukraine, PSB, C-Tick, Korean-KC, CECP, CCC, WEEE, RoHS
<b>WARRANTY</b>		3-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service***

## Optional Accessories

Wireless Presentation Gateway .....	WPG-370
Wireless Presentation Gateway Dongle .....	WPG-300
3D Active Shutter Glasses .....	PGD-350
Ceiling Mount Kit .....	WMK-005
Cable Management .....	PJ-CM-004
Carrying Case .....	PJ-CASE-009

## What's in the box?

PJD5350LS projector, power cable, VGA cable, remote control with batteries, Quick Start Guide, ViewSonic Wizard CD (with User Guide)



# ProSelecta