

Amazing color accuracy | Secure MHL/HDMI port | Network capable | Smart design | Enhanced sound




1280 x 800
RESOLUTION

3,300
LUMENS

1.21~1.57
THROW
RATIO

The ViewSonic® LightStream™ PJD6550LW WXGA projector features 3,300 lumens, WXGA 1280 x 800 native resolution, an intuitive, userfriendly design and a sleek white chassis. Exclusive SuperColor™ technology offers a wide color gamut for beautiful image production in nearly any environment, while SonicExpert™, ViewSonic's proprietary sound enhancement technology, powers a 10W speaker to deliver incredibly clear and audible sound.

PortAll™—a hidden compartment with an integrated and secure MHL/HDMI port—lets you discretely stream multimedia content from a wireless dongle, or lets you connect to other devices via an HDMI cable. A cable management hood eliminates unsightly cable clutter, and a top lamp door enables easy access for lamp maintenance. With shorter throw ratio, 1.3x optical zoom, H/V keystone correction, corner adjustments, and extensive connectivity, the PJD6550LW provides for flexible and quick set-ups. The PJD6550LW is the ideal projector for both high definition presentations and vibrant multimedia entertainment

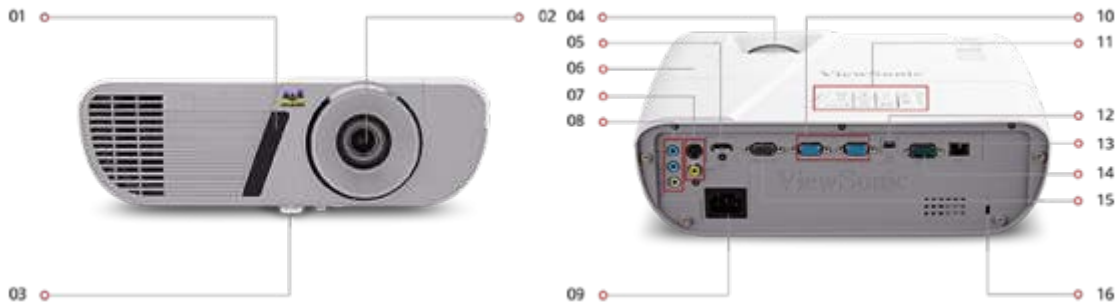

01. IR remote sensor
02. Projection lens
03. Elevation foot
04. Focus / zoom rings
05. HDMI
06. PortAll (HDMI/MHL)
07. Video In
08. Audio In/Out
09. AC In
10. VGA (x2)
11. Control Panel
12. USB type Mini B
13. LAN
14. RS232
15. Monitor Out
16. Kensington® Lock Slot

Throw Ratio:	1.21–1.57
Display Size (in.):	30 - 300 in. / 0.76 - 7.62 m
Keystone:	Vertical ($\pm 30^\circ$) / Horizontal ($\pm 30^\circ$)
Lens:	1.3x Manual optical zoom / manual optical focus
Light Source (watt):	190
Light Source Life, Normal (hours):	5000
Light Source Life, Dynamic Eco-Mode (hours):	10000
Color Depth:	30 bits, 1.07B Color (10+10+10)
Dynamic Contrast Ratio:	22000:1
Aspect Ratio:	16:10

Video Signal:

Frequency Horizontal:	15–102KHz
Frequency Vertical:	23–120Hz

Compatibility:

PC Resolution (max):	1920x1080
Mac® Resolution (max):	1920x1080 (may require MAC adapter)

Connector:

USB 2.0 Type B(1), Ethernet LAN (RJ45)(1), 3.5mm Audio Out(1), 3.5mm Audio In(2), Control (RS-232)(1), HDMI 1.4(1), HDMI MHL(1), Composite RCA Video In(1), Mini USB(1), RGB Input(15-pin mini D-Sub (x2))

Audio:

Internal Speakers:	10W
--------------------	-----

Power:

Voltage:	100~240VAC (Auto Switching), 50-60Hz (universal)
Consumption (max):	330W
Stand-by:	<0.5W

Controls:

Physical Controls:	Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source
On Screen Display:	Display, Picture, Source, System Setup (Basic), System Setup (Advanced), Information

Operating Conditions:

Temperature:	32-104° F (0–40° C)
Humidity (non-condensing):	10-90%

Additional Hardware:

Kensington Lock Slot:	1
-----------------------	---

Weight (imperial):

Net Without Stand (lbs):	5.1
Gross (lbs):	8.8

Weight (metric):

Net Without Stand (kg):	2.3
Gross (kg):	4.0

Dimensions (metric) (WxHxD):

Packaging (mm):	410 x 450 x 225 mm
Physical Without Stand (mm):	316 x 228 x 103.7 mm

Dimensions (imperial) (WxHxD):

Packaging (in.):	16.0 x 17.72 x 8.85 in.
Physical Without Stand (in.):	12.44 x 8.98 x 4.08 in.

Display:

Type:	DLP
Resolution Type:	WXGA
Resolution:	1280 x 800
Brightness (ANSI Lumens):	3,300
Throw Distance:	3.3 – 32.8 ft. / 1.0 – 10.0 m