



Product Description


Featuring 1280x800 WXGA resolution and 3,000 ANSI lumens of brightness, the ViewSonic® LS600W is a lamp-free LED projector ideal for business and education. No matter the environment, expect stunning images and vivid colors, as this projector boasts 125% Rec. 709 color accuracy. With 2nd generation LED technology, the LS600W eliminates the need to continuously swap out bulbs and dispose of toxic chemicals. In addition, an IP5X sealed optical engine prevents dust and moisture from entering the projector, ensuring impeccable image quality and a long maintenance-free lifespan of up to 30,000 hours.* An automatic on/off feature delivers efficiency and power savings, while comprehensive LAN control ensures easy management across meeting rooms and classrooms. Whether for business or education, the ViewSonic LS600W LED projector provides a picture-perfect presentation every time.

Key Features

Advanced LED Light Source | Bright Images in Any Environment |

Convenient Auto Power On/Off | 360-degree Orientation |

Comprehensive LAN Control

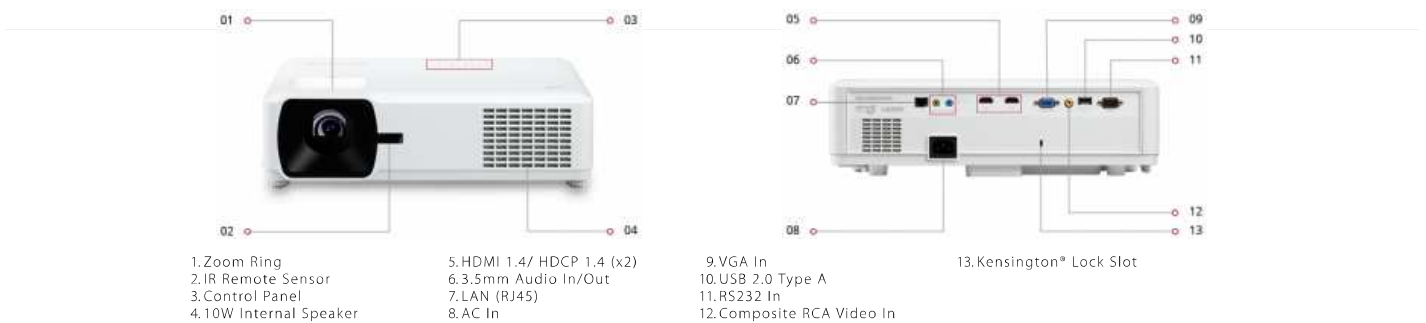


- 1. Zoom Ring
- 2. IR Remote Sensor
- 3. Control Panel
- 4. 10W Internal Speaker

- 5. HDMI 1.4/ HDCP 1.4 (x2)
- 6. 3.5mm Audio In/Out
- 7. LAN (RJ45)
- 8. AC In

- 9. VGA In
- 10. USB 2.0 Type A
- 11. RS232 In
- 12. Composite RCA Video In


- 13. Kensington® Lock Slot



1280 x 800
RESOLUTION



3,000 ANSI
LUMENS



1.37-1.64
THROW RATIO

Contact Sales

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

Display:

| | |
|------------------------------------|---|
| Type: | DLP LED |
| Resolution Type: | WXGA (1280x800) |
| Resolution: | 1280 x 800 |
| Brightness (Lumens): | 3,000 ANSI |
| Display Size (in.): | 30 - 300 in. / 0.76 - 7.62 m |
| Throw Distance: | 0.86-10.60m (100"@2.95m) |
| Throw Ratio: | 1.37-1.64 |
| Keystone: | Vertical (+/- 40°) / Horizontal (+/- 40°) |
| Lens: | 1.2x optical zoom |
| Light Source (watt): | RGBB LED |
| Light Source Life, Normal (hours): | 30000 |
| Color Depth: | 1.07 Billion Colors |
| Dynamic Contrast Ratio: | 3,000,000:1 |
| Aspect Ratio: | 16:10 |

Video Signal:

| | |
|-----------------------|------------|
| Frequency Horizontal: | 15K~105KHz |
| Frequency Vertical: | 23-120Hz |

Compatibility:

| | |
|------------------------|-------------|
| PC Resolution (max): | 1920 x 1080 |
| Mac® Resolution (max): | 1920 x 1080 |

Connector:

USB 2.0 Type A(1), Ethernet LAN (RJ45)(1), 3.5mm Audio Out(1), 3.5mm Audio In(1), Control (RS232)(1), HDMI 1.4 (with HDCP 1.4)(2), VGA In(1), Composite RCA Video In(1), RCA Audio In (L/R)(1)

Audio:

| | |
|--------------------|----------|
| Internal Speakers: | 10W (x1) |
|--------------------|----------|

Power:

| | |
|------------------------|-----------------------------|
| Voltage: | 100-240V+/- 10%, 50/60Hz AC |
| Consumption (typical): | 270W |
| Stand-by: | <0.5W |

Controls:

| | |
|--------------------|--|
| Physical Controls: | Keypad, Power key |
| On Screen Display: | Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality) |

Operating Conditions:

| | |
|--------------|-----------------------|
| Temperature: | 32-104° F (0 - 40° C) |
|--------------|-----------------------|

Additional Hardware:

| | |
|-----------------------|---|
| Kensington Lock Slot: | 1 |
|-----------------------|---|

Weight (imperial):

| | |
|--------------|------|
| Net (lbs): | 11.0 |
| Gross (lbs): | 15.4 |

Weight (metric):

| | |
|-------------|-----|
| Net (kg): | 5.0 |
| Gross (kg): | 7.0 |

Dimensions (imperial) (WxHxD):

| | |
|-----------------|-------------------|
| Physical (in.): | 15.2 x 4.6 x 10.9 |
|-----------------|-------------------|

Dimensions (metric) (WxHxD):

| | |
|----------------|-----------------------|
| Physical (mm): | 386.0 x 116.0 x 276.0 |
|----------------|-----------------------|

General:

Regulations: cTUVus

PACKAGE CONTENTS: LS600W projector, power cable, VGA cable, remote control, Quick Start Guide

Warranty: Three-year limited warranty on parts and labor, 1-year limited warranty on the light source, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

UPC: 766907007145

Accessories:

IFP2410, IFP2710, PGD-350, PJ-SCW-1001W, PJ-WMK-006, PJ-WMK-007, VCB10, VSR100

Awards: